

SURVEY FOR KEASEY FAMILY CORP.  
PARCEL LOCATED IN S.E.  $\frac{1}{4}$  SECTION 26  
TOWNSHIP 5 NORTH-RANGE 5 WEST-W.M.  
COLUMBIA COUNTY, OREGON

SCALE: 1"=100'

FEB. 1982

Revised May 18, 1982


Rhly Dwy Co. Surveyor  
(See folder #3301)

NOTES:

- ° DENOTES  $\frac{5}{8}$  IRON ROD W/YELLOW P.V.C. CAP STAMPED L.S. 1570 SET BY ME IN FEB. '82.
- DENOTES MONUMENTS FOUND AS NOTED
- BEARINGS BASED ON  $\frac{1}{4}$  MILE BACKSIGHT TAKEN DURING TRAVERSE FROM S.E. COR OF SECTION
- ALL BLAZES AND SCRIBING NOTED ARE PAINTED RED
- FOUND CORNERS ARE REFERENCED IN LFCO. RECORDS
- NORTHERLY CORNERS (2) LIE APPROXIMATELY 1 ft so of EDGE OF PAVEMENT MOST PROBABLY WITHIN THE ROCK CREEK ROAD R.O.W. AND WERE THUS SET TO INDICATE ALIGNMENT AND NOT OWNERSHIP.
- FOUND S  $\frac{1}{4}$  COR ( $\frac{1}{2}$ " I.P.) ON S. Side ROCK CREEK BEARS N 87° 5' 0" W (MAG) 2617.48 FM S.E. SEC COR BT 24" Red Alder 52' S76W Bark Blazed  $\frac{1}{4}$  BT Yellow TAG (LFCO) 3-24-77 BLAZE PAINTED RED
- FOUND W  $\frac{1}{16}$  26/35 WITNESS COR, NOT TIED; ON TOP OF STEEP BLUFF, S. Side ROCK CREEK, W.C. CALLED AS APPROX 30' SO OF TRUE COR. CALC'D COR. APPEARS FURTHER NORTH BUT STILL WELL WITHIN ROCK CREEK
- FOUND S.W. COR 26 (SEE LFCO RECORDS)

(MAGNETIC)

ROCK CREEK COUNTY ROAD

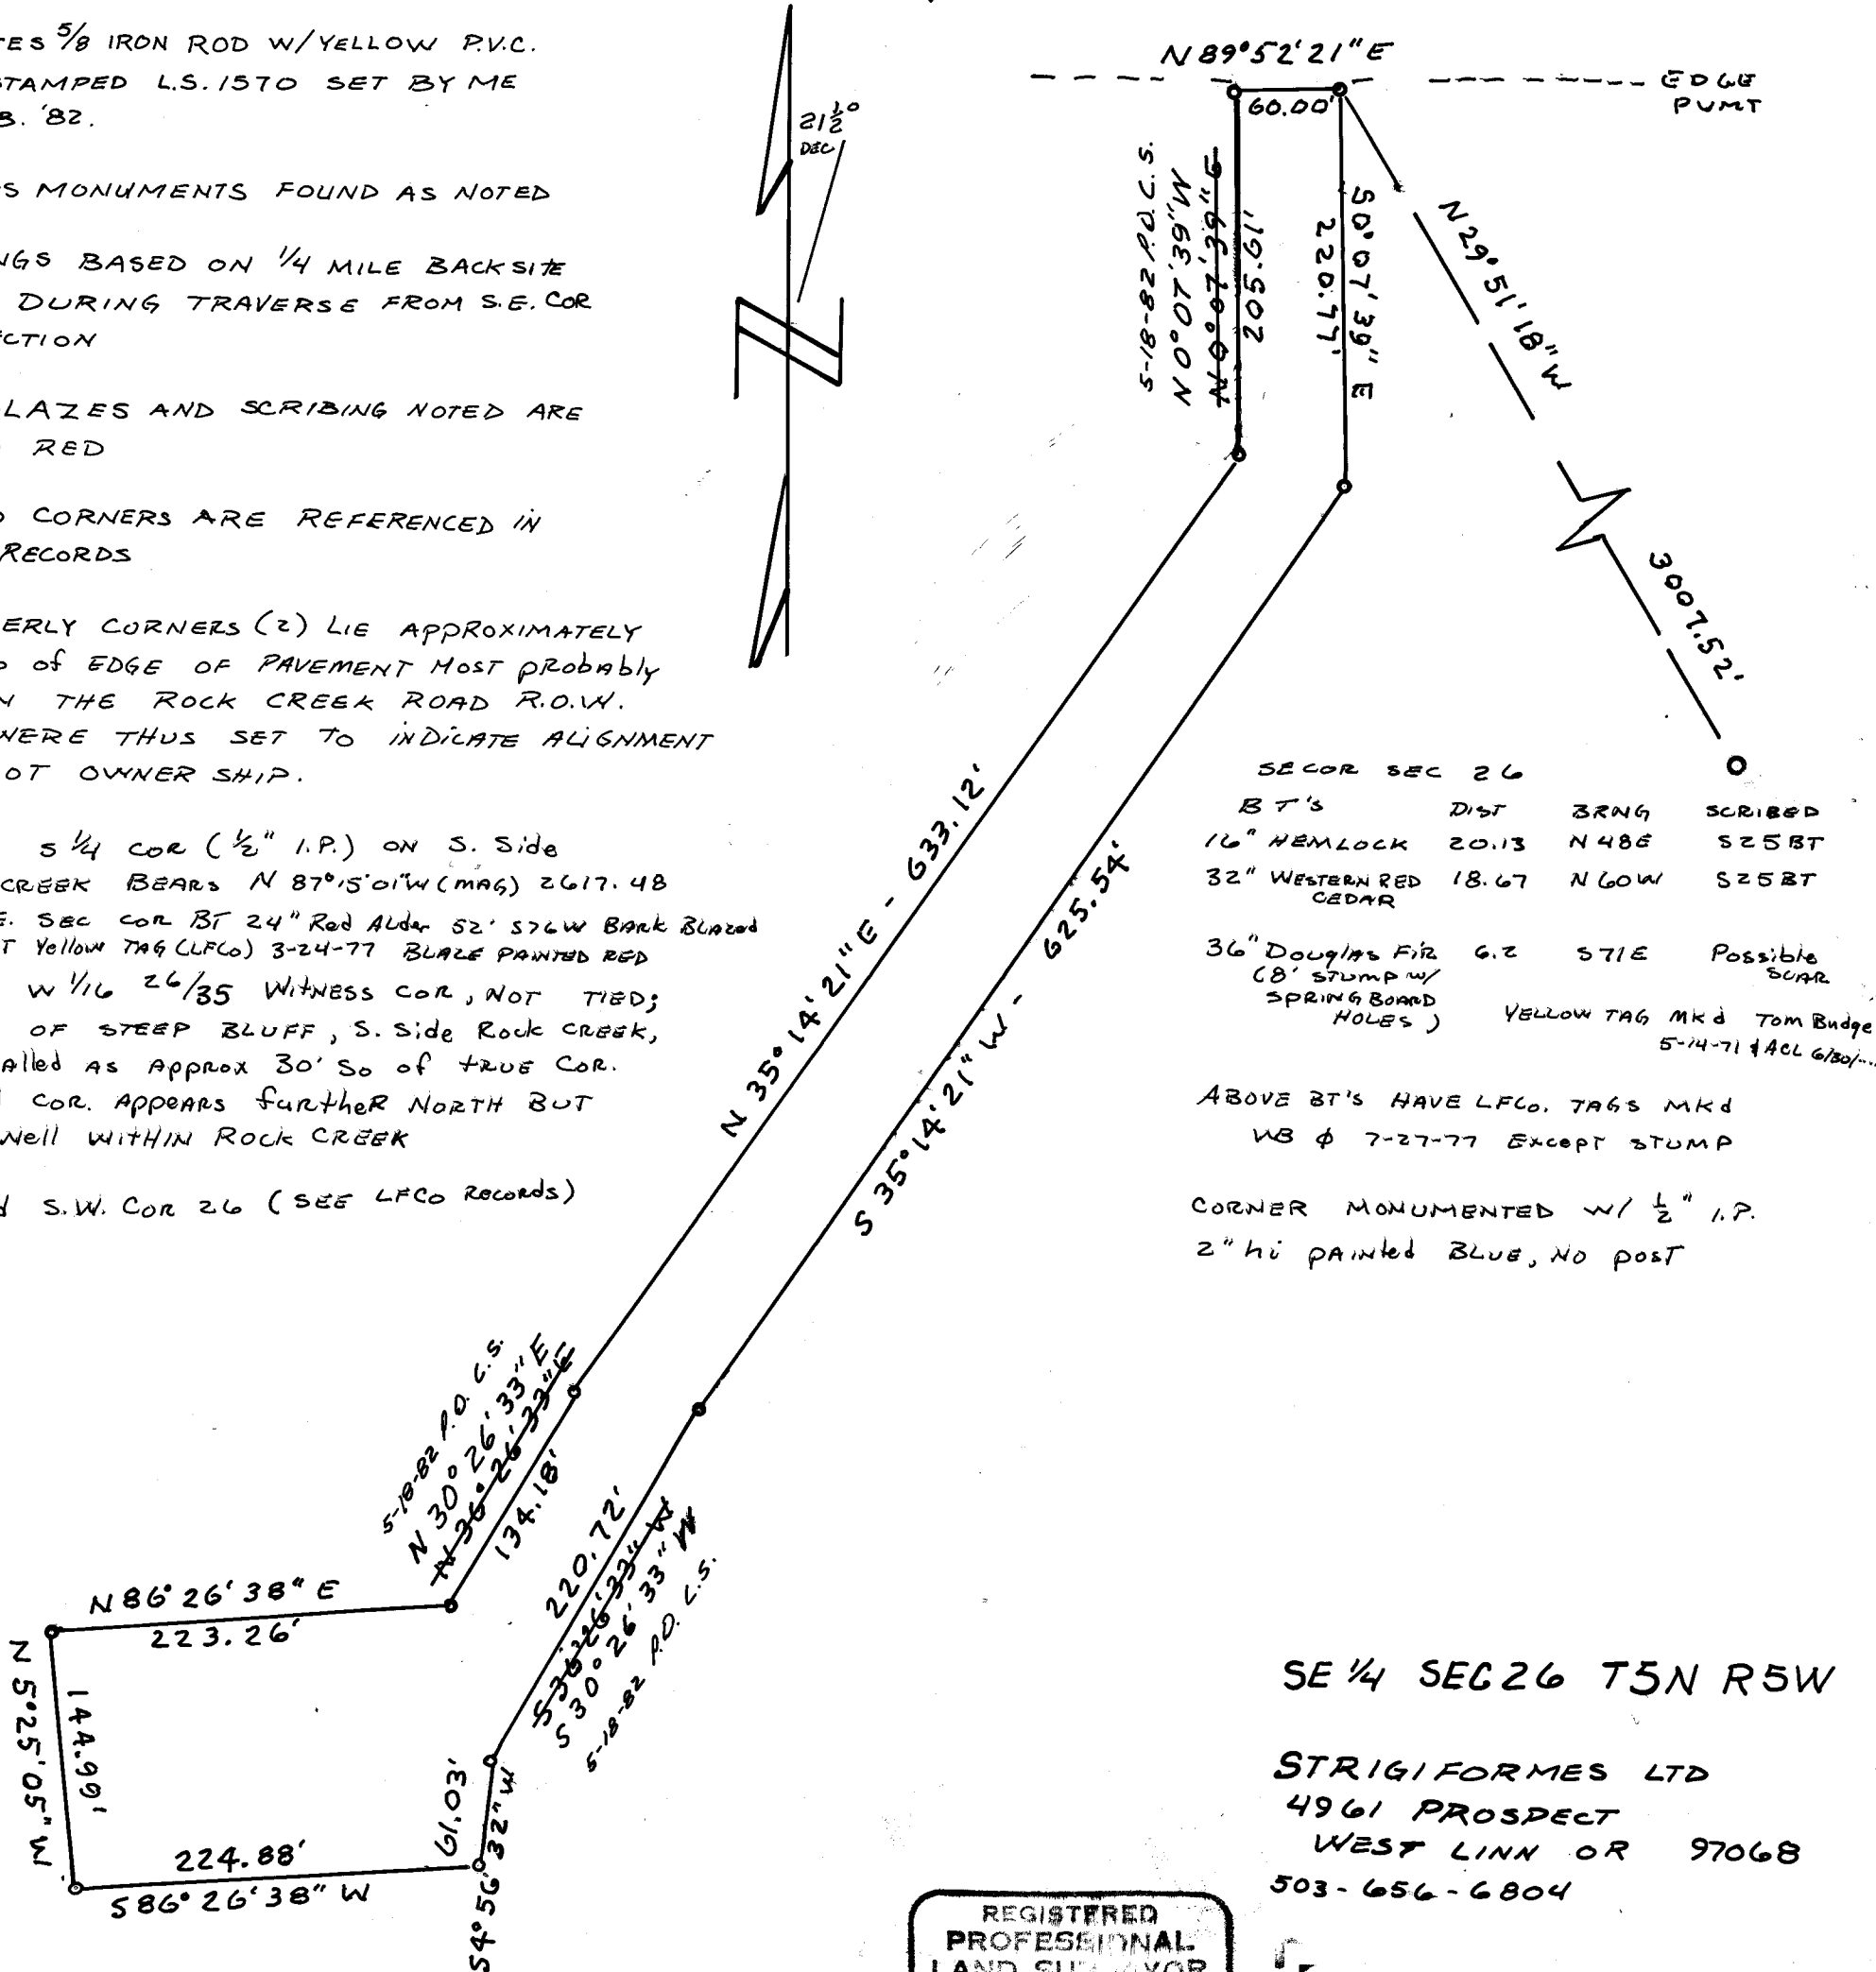

SE  $\frac{1}{4}$  SEC 26 T5N R5W

STRIGIFORMES LTD  
4961 PROSPECT  
WEST LINN OR 97068  
503-656-6804

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

Russell A. Lawrence

OREGON  
FEBRUARY 2, 1978  
RUSSELL A. LAWRENCE  
1570

COUNTY SURVEYOR

RECEIVED 3-23-82

FILED 3-23-82