


3814

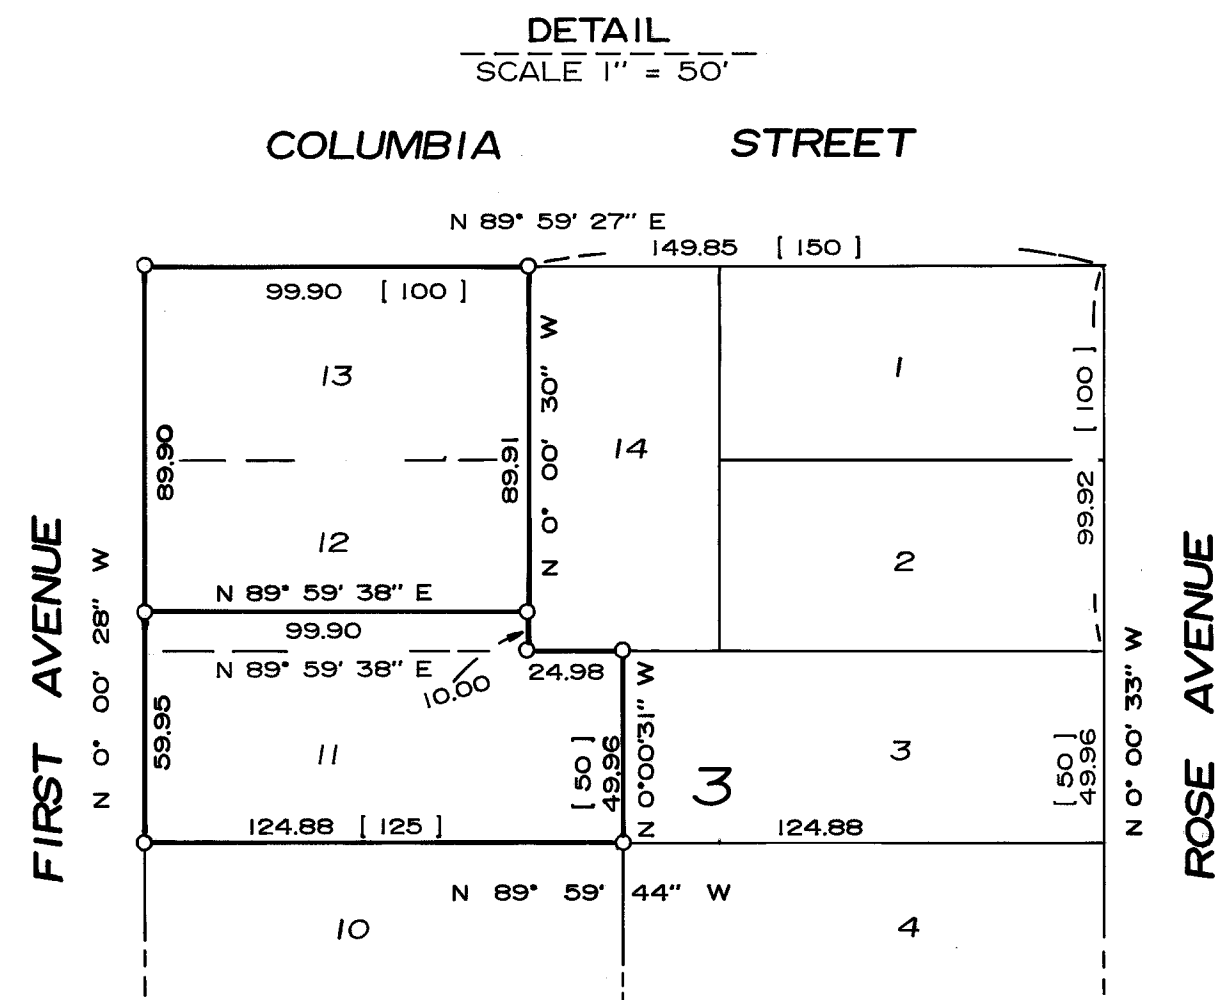


RECORD OF SURVEY
FOR IVAN HEIN
LOCATED IN LOTS 11, 12 AND 13, BLOCK 3,
"CENTRAL ADDITION", IN THE NORTHEAST QUARTER
OF SECTION 5, TOWNSHIP 4 NORTH,
RANGE 4, WEST, WILLAMETTE MERIDIAN
COLUMBIA COUNTY, OREGON.

SCALE 1" = 100'

NOVEMBER 20, 1992

- = FOUND MONUMENT AS NOTED.
- = SET 5/8" X 30" IRON ROD WITH YELLOW PLASTIC CAP "SUMMERS P.L.S. 1042".
- [] = RECORD PER PLAT OF "CENTRAL ADDITION" TO VERNONIA.

PREPARED BY
JOHNNIE M. SUMMERS P.L.S., INC.
549 S.W. WALNUT STREET
P.O. BOX 1044
HILLSBORO, OREGON 97123
(503) 648-2019

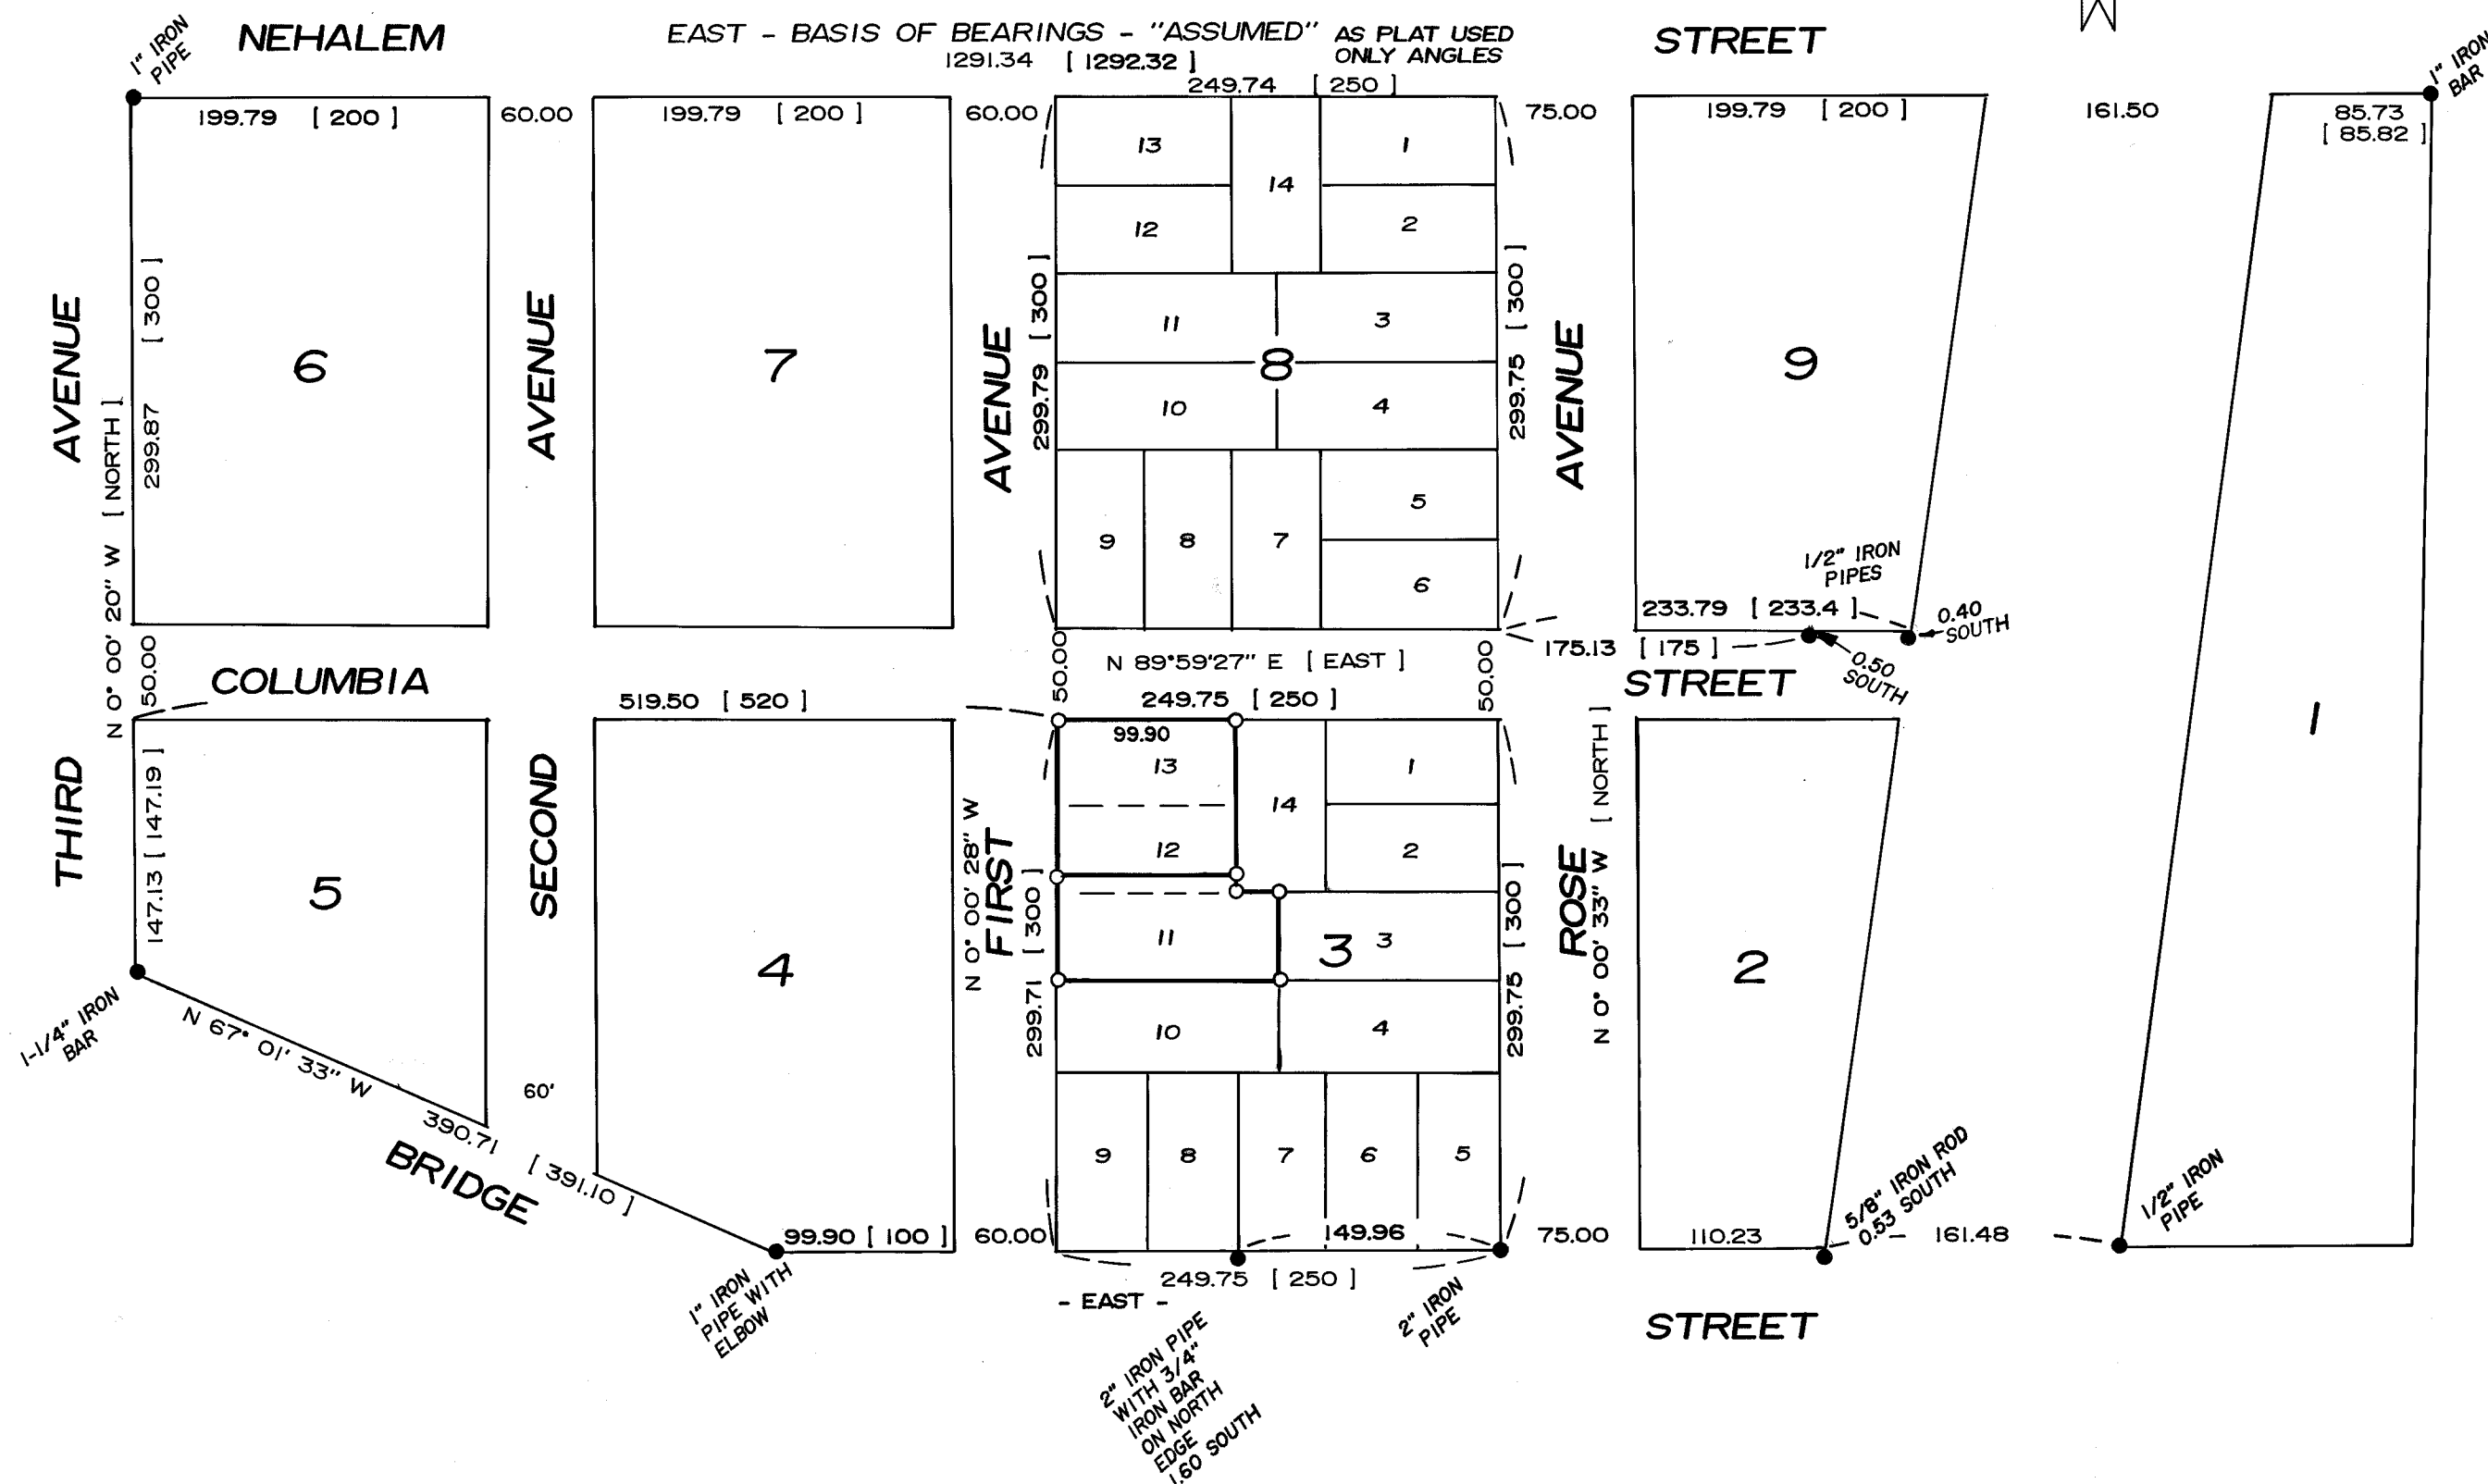

THE PURPOSE OF THIS SURVEY WAS TO MONUMENT A PROPERTY LINE ADJUSTMENT IN BLOCK 3 "CENTRAL ADDITION" TO VERNONIA.

1. I FOUND AND HELD MONUMENTS AS NOTED FOR THE NORTHWEST CORNER BLOCK 6, THE NORTHEAST CORNER BLOCK 1, SOUTHWEST CORNER BLOCK 5, THE ANGLE CORNER SOUTH LINE BLOCK 4 AND THE SOUTHEAST CORNER BLOCK 3.
2. I THEN PRORATED THE NORTHWEST AND NORTHEAST CORNERS OF BLOCK 8 BY HOLDING THE SAID NORTHWEST CORNER OF BLOCK 6 AND THE NORTHEAST CORNER OF BLOCK 1 AS SHOWN.
3. I THEN PRORATED THE SOUTHWEST CORNER BLOCK 6 AND THE NORTHEAST CORNER BLOCK 5 HOLDING MONUMENTS AS NOTED.
4. I THEN ESTABLISHED THE SOUTHWEST CORNER BLOCK 3 BY PRORATION, HOLDING SAID SOUTHEAST CORNER AND ANGLE CORNER ON SOUTH LINE BLOCK 4.
5. I THEN ESTABLISHED THE NORTHEAST CORNER OF BLOCK 3 BY PRORATION OF SAID SOUTHEAST CORNER AND THE NORTHEAST CORNER OF BLOCK 8 (STEP 2).
6. I THEN ESTABLISHED THE NORTHWEST CORNER OF BLOCK 3 BY PRORATING BETWEEN THE SAID SOUTHWEST CORNER (STEP 4) WITH THE NORTHWEST CORNER OF BLOCK 8 (STEP 2).
7. I THEN PRORATED LOTS IN BLOCK 3 AND THEN SET MONUMENTS AS NOTED FOR LOT CORNERS AS WELL AS THE LINE ESTABLISHING THE SOUTH 10 FEET OF LOT 12, (BEING THE ADJUSTMENT), AS SHOWN.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Johnnie M. Summers
OREGON
AUGUST 22, 1975
JOHNNIE M. SUMMERS
1042

COUNTY SURVEYOR
RECEIVED 12-8-92
FILED 12-8-92

3814