


6606

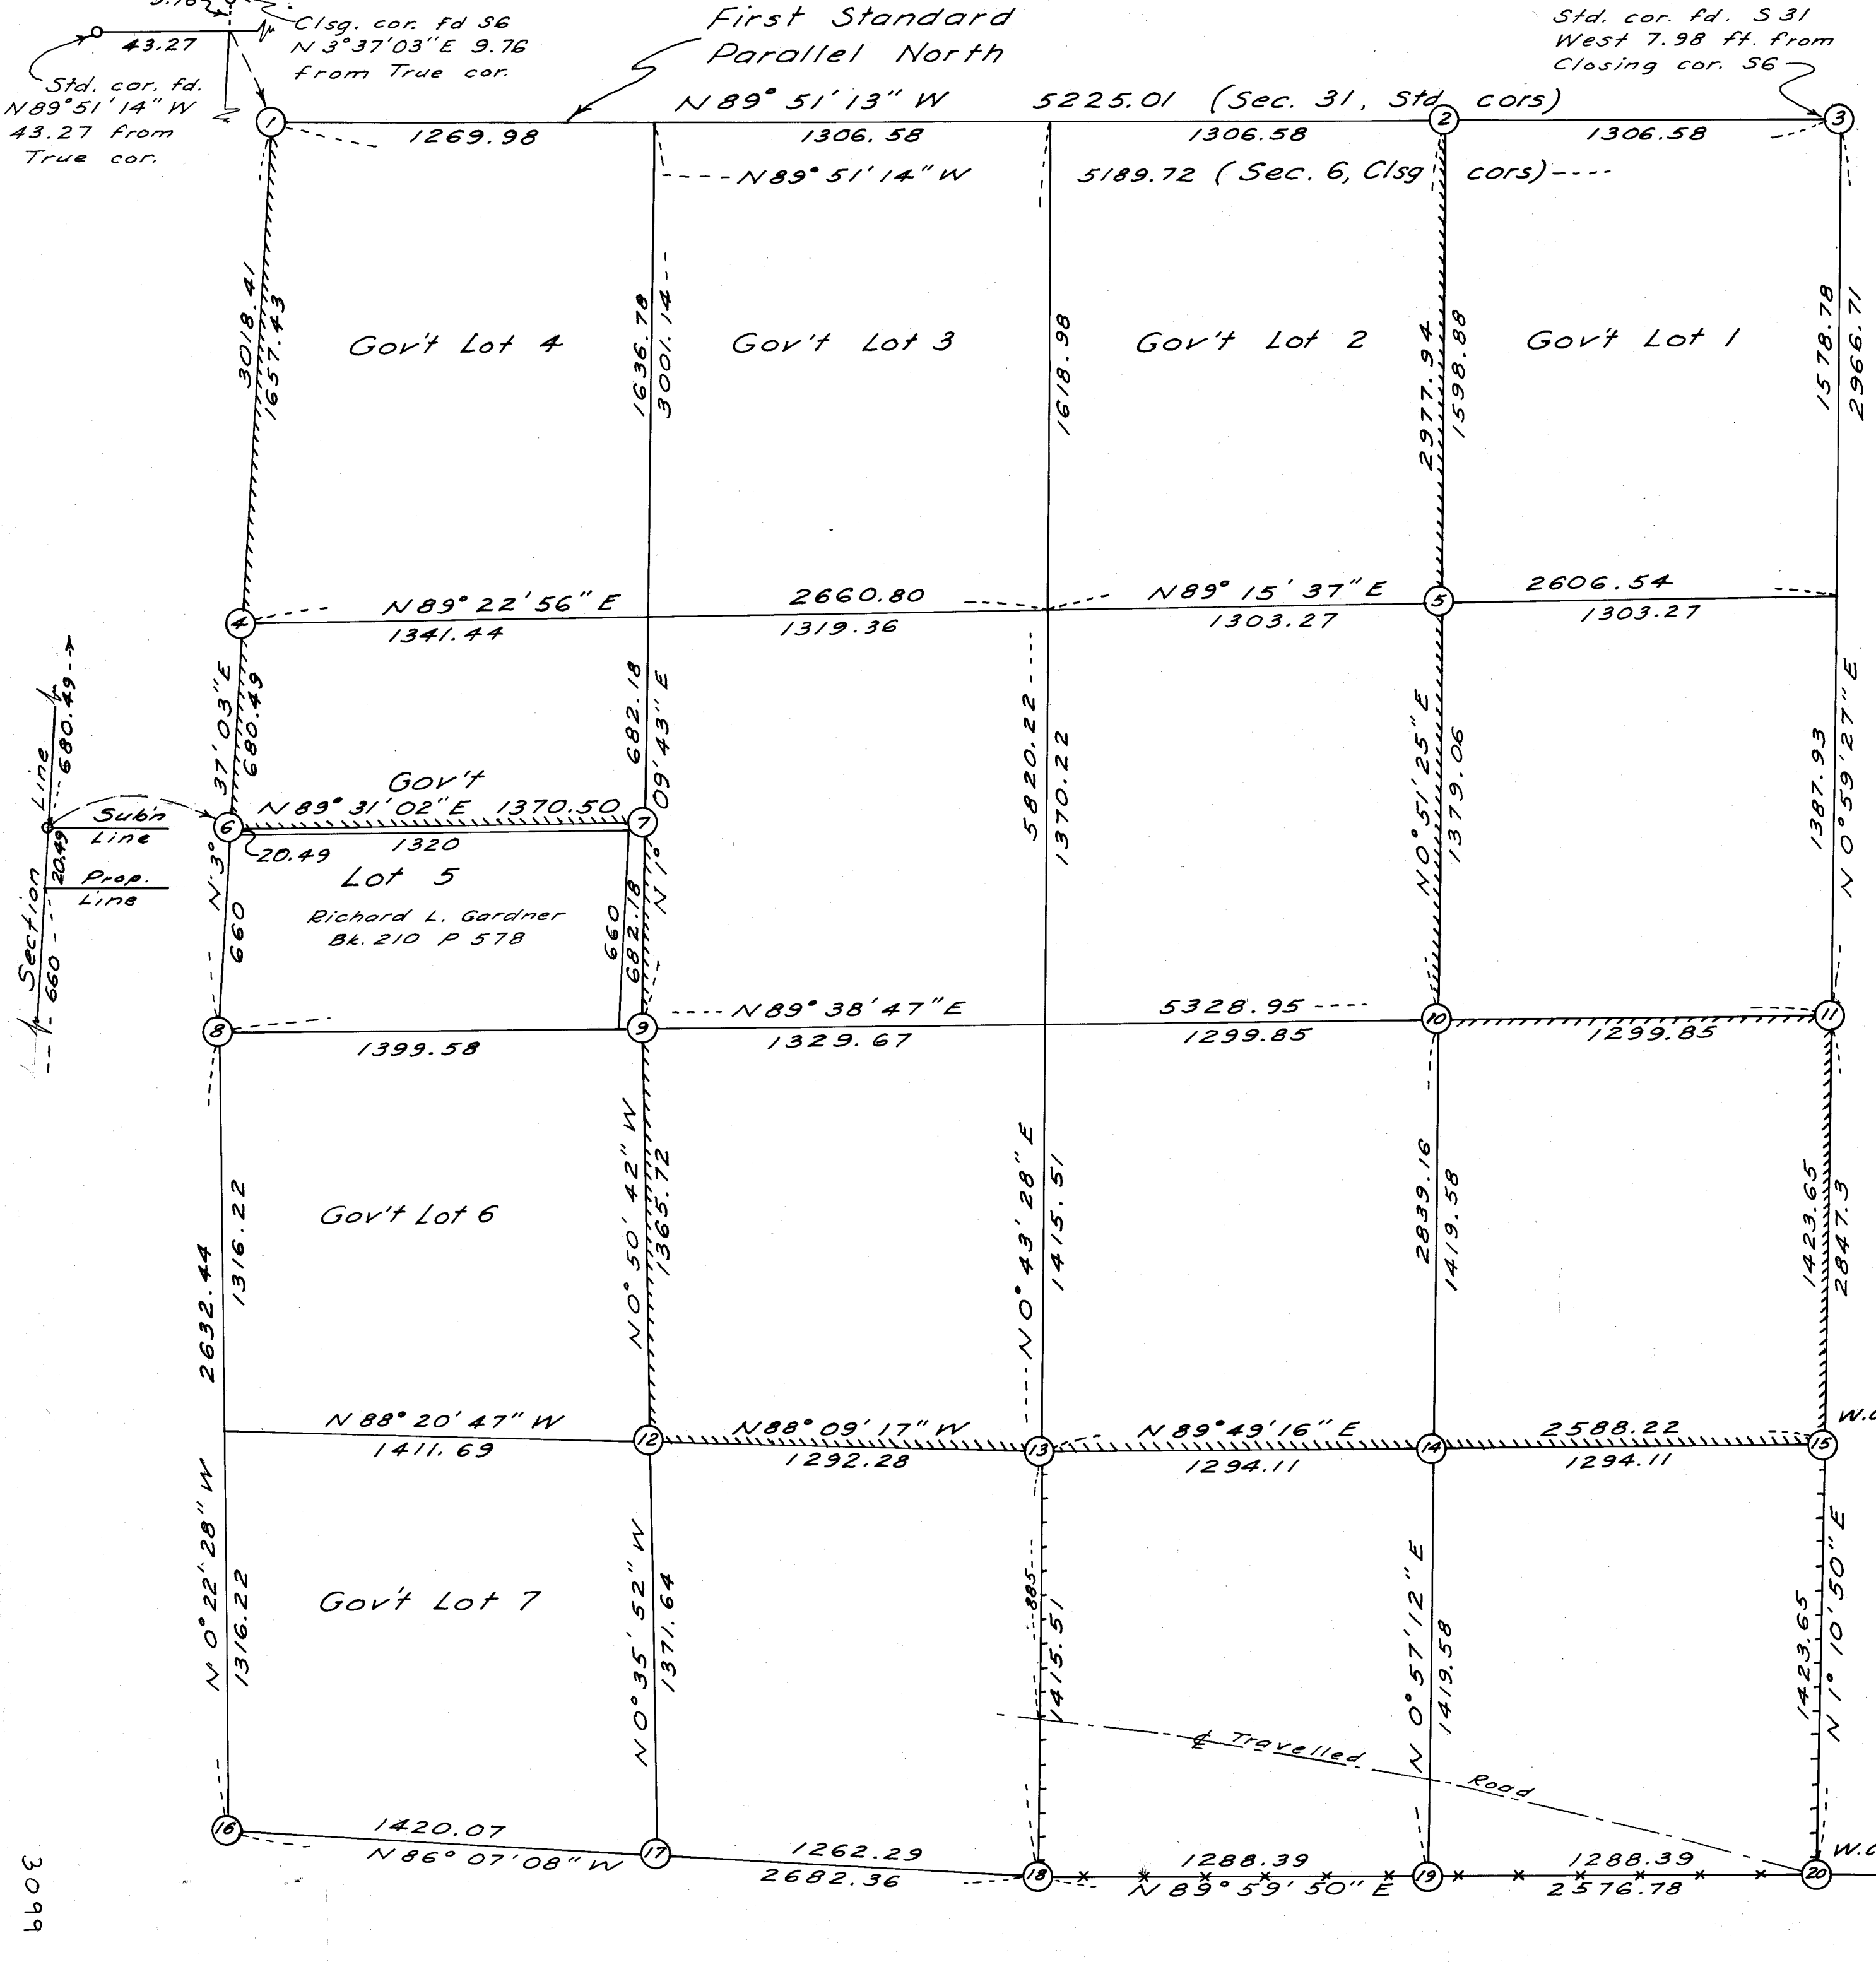

MONUMENTS (See Land Corner Records)

- ① Set steel post with tag on Standard Parallel.
- ② Set brass cap in iron pipe, post & tag South 2.0 9" fir BT S 35° E 19.2 & 8" fir BT S 16° W 24.3
- ③ Found 1" capped iron pipe.
- ④ Set brass cap in iron pipe, post & tag South 2.0 10" fir BT N 2° E 5.2 & 13" fir BT N 74° W 21.0
- ⑤ Set brass cap in iron pipe, post & tag South 2.0 17" fir BT N 41° E 4.05 & 8" fir BT S 48° W 6.1
- ⑥ Set brass cap in iron pipe, post & tag East 2.0 13" alder BT N 19° E 21.3 & 10" alder BT S 73° E 16.75 18" fir BT N 77° W 18.4
- ⑦ Set brass cap in iron pipe, post & tag South 2.0 18" fir BT N 7° W 19.7 & 30" fir BT East 17.3
- ⑧ Found fence corner, old BTs N 61° 51' W 16.96; N 31° 07' E 28.79 & S 84° 11' E 25.24
- ⑨ Set brass cap in iron pipe, post & tag South 2.0 13" fir BT N 63° W 4.2 & 8" fir BT S 27° E 10.9
- ⑩ Set brass cap in iron pipe, post & tag South 2.0 13" fir BT S 33° E 16.1 & 17" fir S 44° 30' W 10.7
- ⑪ Set brass cap in iron pipe, post & tag South 2.0 15" fir BT S 23° E 17.2 & 14" fir BT S 35° W 14.4
- ⑫ Set brass cap in iron pipe, post & tag East 1.0 20" fir BT N 15° E 28.3 & 10" fir BT S 46° E 11.0
- ⑬ Set brass cap in iron pipe, post & tag North 2.0 12" fir BT N 20° E 20.2 & 13" fir BT S 21° E 5.9 Old fir stump West 4.5
- ⑭ Set brass cap in iron pipe, post & tag North 2.0 12" fir BT N 53° E 7.8 & 12" fir BT S 5° W 5.0
- ⑮ Corner in creek; set Witness Corner brass cap in iron pipe N 1° 10' 50" E 24.32 from True Corner, post & tag South 2.0 from W.C. from which: 13" fir BT N 23° E 11.3 & 12" fir BT N 66° W 12.8
- ⑯ Found 3/4" iron pipe in fence corner & C.S. post.
- ⑰ Found 3/4" iron pipe in fence corner, 1" pipe alongside.
- ⑱ Found bolt & nut in fence corner, 1 1/2" pipe over.
- ⑲ Set 5/8" x 30" iron rod 4.0 ft. South of fence. 18" fir BT S 48° E 14.7 & 17" fir BT N 17° W 32.5
- ⑳ Set 5/8" x 30" iron rod in & gravelled road. Set Witness Corner 5/8" x 30" rod N 1° 10' 50" E 14.4 ft. BTs from True Corner: 21" fir BT S 49° E 67.0 16" fir BT S 11° W 33.7 & 24" fir BT N 1° W 32.0

Basis of Brg: C.S. Map #176

LEGEND

- Line blazed & flagged
  - Line staked & flagged
  - Line fence
- Scale: 1" = 400'

REGISTERED PROFESSIONAL LAND SURVEYOR	COLUMBIA COUNTY SURVEYOR	
	DATE RECEIVED	5-22-79
Robert M. Swamy	DATE FILED	5-22-79
OREGON JULY 12, 1969 ROBERT M. SWANEY 624	BY	J 102

SUBDIVISION OF  
SECTION 6, T. 4 N., R. 4 W., WM.  
Columbia County, Oregon  
May 2, 1979

Found 2" Iron Pipe