


RECORD OF SURVEY
for CAVENHAM FOREST IND., INC.
IN SECTIONS 2, 3, 11, T.4N, R.4W, W.M.
COLUMBIA COUNTY, OREGON
SCALE 1"=1000' DECEMBER 18, 1989

NOTE:
THESE PROPERTY CORNERS
WERE ESTABLISHED &
ACCEPTED BY CUMBERLAND
& BY SCHLACK AT OR NEAR
TIME OF SCHLACK PURCHASE

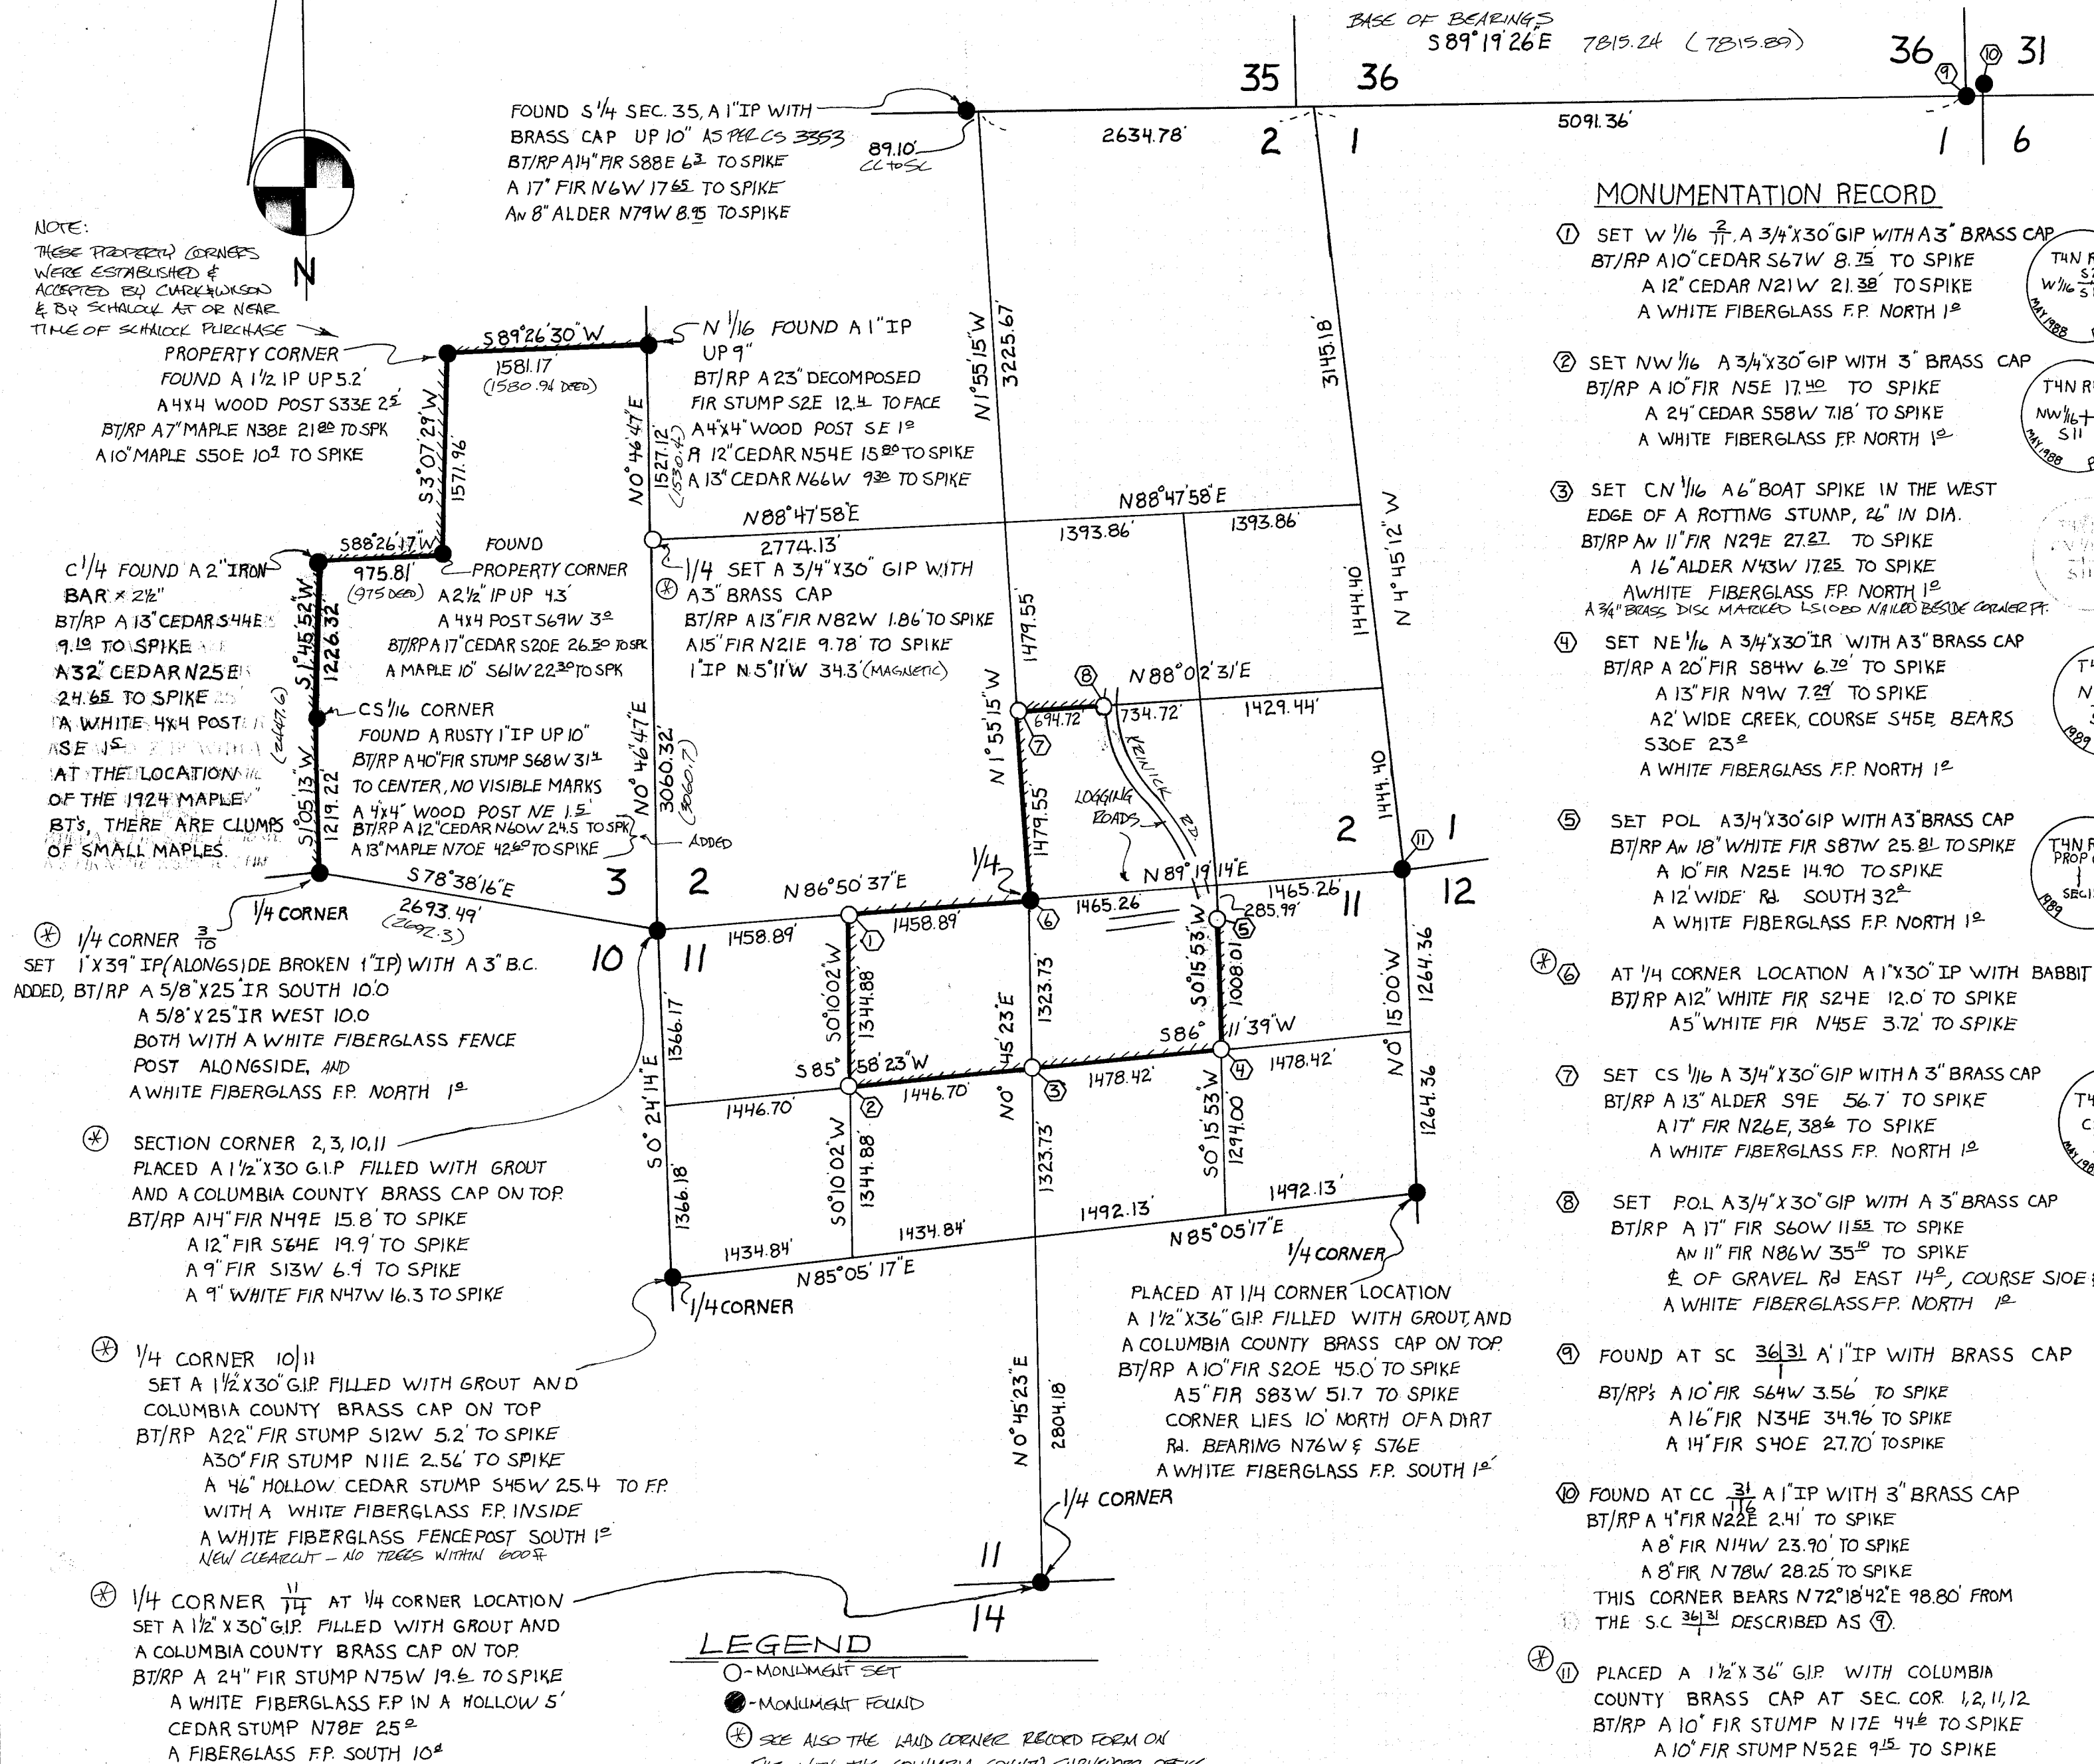

LEGEND

- - MONUMENT SET
- - MONUMENT FOUND
- ⊙ - SEE ALSO THE LAND CORNER RECORD FORM ON FILE WITH THE COLUMBIA COUNTY SURVEYORS OFFICE
- FP - WHITE FIBERGLASS FENCE POST
- BT/RP - BEARING OBJECT / TREE - REFERENCE POINT
- SPK - A RAILROAD SPIKE - OR - 6" BOAT SPIKE AT 1/2" SQUARE WITH 1" DIA HEAD -

MONUMENTATION RECORD

- SET W 1/16 1/4 A 3/4 X 30" GIP WITH A 3" BRASS CAP
BT/RP A 10" CEDAR S67W 8.75' TO SPIKE
A 12" CEDAR N21W 21.38' TO SPIKE
A WHITE FIBERGLASS F.P. NORTH 1°
- SET NW 1/16 1/4 A 3/4 X 30" GIP WITH 3" BRASS CAP
BT/RP A 10" FIR N5E 17.40' TO SPIKE
A 24" CEDAR S58W 718' TO SPIKE
A WHITE FIBERGLASS F.P. NORTH 1°
- SET CN 1/16 1/4 A 6" BOAT SPIKE IN THE WEST
EDGE OF A ROTTING STUMP, 26" IN DIA.
BT/RP AN 11" FIR N29E 27.82' TO SPIKE
A 16" ALDER N43W 17.25' TO SPIKE
A WHITE FIBERGLASS F.P. NORTH 1°
A 3/4" BRASS DISC MARKED L51000 NAILD BESIDE CORNER PT.
- SET NE 1/16 1/4 A 3/4 X 30" IR WITH A 3" BRASS CAP
BT/RP A 20" FIR S84W 6.79' TO SPIKE
A 13" FIR N9W 7.23' TO SPIKE
A 2" WIDE CREEK, COURSE S45E BEARS
S30E 23°
A WHITE FIBERGLASS F.P. NORTH 1°
- SET POL A 3/4 X 30" GIP WITH A 3" BRASS CAP
BT/RP AN 18" WHITE FIR S87W 25.81' TO SPIKE
A 10" FIR N25E 14.90' TO SPIKE
A 12" WIDE RD. SOUTH 32°
A WHITE FIBERGLASS F.P. NORTH 1°
- AT 1/4 CORNER LOCATION A 1' X 30" IP WITH BABBIT CAP
BT/RP A 12" WHITE FIR S24E 12.0' TO SPIKE
A 5" WHITE FIR N45E 3.72' TO SPIKE
- SET CS 1/16 1/4 A 3/4 X 30" GIP WITH A 3" BRASS CAP
BT/RP A 13" ALDER S9E 56.7' TO SPIKE
A 17" FIR N26E 38.4' TO SPIKE
A WHITE FIBERGLASS F.P. NORTH 1°
- SET POL A 3/4 X 30" GIP WITH A 3" BRASS CAP
BT/RP A 17" FIR S60W 11.53' TO SPIKE
AN 11" FIR N86W 35.50' TO SPIKE
E. OF GRAVEL RD. EAST 14°, COURSE S10E & N10E
A WHITE FIBERGLASS F.P. NORTH 1°
- FOUND AT SC 36 31 A 1" IP WITH BRASS CAP
BT/RP A 10" FIR S64W 3.56' TO SPIKE
A 16" FIR N34E 34.96' TO SPIKE
A 14" FIR S40E 27.70' TO SPIKE
- FOUND AT CC 31 A 1" IP WITH 3" BRASS CAP
BT/RP A 4" FIR N22E 2.41' TO SPIKE
A 8" FIR N14W 23.90' TO SPIKE
A 8" FIR N78W 28.25' TO SPIKE
THIS CORNER BEARS N72°18'42"E 98.80' FROM
THE S.C. 36 31 DESCRIBED AS ⑦.
- PLACED A 1 1/2 X 36" GIP WITH COLUMBIA
COUNTY BRASS CAP AT SEC. COR. 1, 2, 11, 12
BT/RP A 10" FIR STUMP N17E 44.6' TO SPIKE
A 5/8" IR NORTH 5° A ROCK MARKED
"X" ALONGSIDE
A 5/8" IR EAST 5° ROCK MKD "X" ALONGSIDE
AT COR. PLACED FOUND ROCK MKD "X" ALONGSIDE IP
WITH WHITE FIBERGLASS F.P. BESIDE.

NARRATIVE:

THIS SURVEY WAS ACCOMPLISHED AT THE REQUEST OF
CAVENHAM FOREST IND. TO MARK & MONUMENT THE TRACT
IN SECTIONS 2 & 11 AS SHOWN, AND DESCRIBED IN COLUMBIA
COUNTY DEED RECORDS, BOOK 218, PG 517. ALSO BOUNDARY
RECOVERED FROM PREVIOUSLY ESTABLISHED SUBDIVISION WORK IN SECTION
3. WE FOUND & REHABED MONUMENTATION FROM THE 1924 DEED CS# 203.
WE ALSO MARKED LINE BETWEEN EXISTING PROSPECT CORNERS AS SHOWN.
IT WAS NOT OUR INTENT TO CHECK, OR RE-ESTABLISH SUBDIVISION LINES
& MONUMENTS IN SECTION 3.

CONTROL FOR SUBDIVISION SECTION 11 IS FROM RECOVERED G.L.O.
EVIDENCE OR PERPETUATED EVIDENCE AT EACH 1/4 CORNER, AND
THE NW 1/4 SEC CORNERS. REMONUMENTATION FOR COLUMBIA COUNTY
SURVEY RECORDS WAS ACCOMPLISHED FOR THE COUNTY SURVEYOR, SEE
CS BT BOOK.

CONTROL FOR SUBDIVISION OF SECTION 2 BEING IN AREAS OF LANDSLIDE,
EXCAVATION, OR LOST EVIDENCE, REQUIRED PROPORTIONING FOR THE N/E
SEC CORNER, THE N 1/4 CORNER, AND THE EAST 1/4.

THIS PROJECT BEGAN WITH CONTROL SEARCH & TRAVERSE WORK
IN 1987, WITH THE BOUNDARY WORK COMPLETED IN LATE '89. LONG
HOURS & MUCH TRAVERSE WORK WAS NECESSARY TO RECOVER THE
NEEDED CONTROL.

A WRITTEN CORNER RECORD FOR REHAB & HISTORY OF THIS;

1/4 SEC 2 & 3; 1/4 SEC 2 & 11; 1/4 SEC 3 & 10;

1/4 SEC 11 & 12; 1/4 SEC 10 & 11; 1/4 SEC 11 & 14;

SEC CORNER OF 1, 2, 11 & 12; & THE SEC CORNER 2, 3, 10 & 11, IS ON
FILE WITH THE COLUMBIA COUNTY SURVEYORS OFFICE. EVIDENCE OF THE
ORIGINAL CORNER LOCATION IS AS NOTED ON THE CORNER RECORDS.

FIELD CREW FOR PROJECT

H.W. (BUD) WEIGAND - E ESCO BELL; E IT
SHAWN STEVENS - DON WALLACE; L S IT

L JERRY KEENON

1311 ALDER ST.

VERNONIA, OREGON 97064

PH 429-6115


BEARINGS BASED ON THE OLSON ENG. SURVEY OF SECTIONS
30 & 31, T.5N, R.3W, FOR LONGVIEW FIBRE CO., CS# 3353
COMMON TIES TO THE STANDARD CORNERS BEING THE S 1/4 SEC 35,
& THE SE SEC COR., SEC. 36 T.5N, R.4W, W.M. AS SHOWN.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Leslie Keenon

OREGON
JULY 30, 1976
LESLIE G. KEENON
P.L.S. 1080

TYPICAL REFERENCE MARKING - BT/RP'S



L. JERRY KEENON
1311 E. ALDER ST.
VERNONIA, OREGON 97064
PH 429-6115

DRAWN BY: DON WALLACE