


# RECORD OF SURVEY FOR

ART JOHNSTON FEBRUARY 3, 1986

IN THE NW 1/4 OF SECTION 13, T4N, R5W, W.M.  
COLUMBIA COUNTY, OREGON.

AS PER GOVERNMENT SURVEY, FEB. 1877, I SET A 5/8" X 30" IRON ROD FOR SECTION CORNER 11-12-13-14, N 45° W 20 LINKS, (13.2 FEET FROM FACE) OF A 80" FIR STUMP, SEVERAL SMALL HEMLOCK STUMPS (12"-24") IN OR NEAR LOCATION FOR OTHER B.T.'S, SOME COMPLETELY ROTTED AWAY, FOUND A 5" X 5" X 36" HAND HEWN POST ON NORTH SIDE OF STUMP, SOME SCRIBES VISIBLE

FOR B.T. RECORD 3-23-1898 RESTORATION OF CORNER 11-12-13-14, I SET A SMALL POST, FOUND A 48" CEDAR STUMP N 40° E 110 LINKS (72.6') AND A 50" FIR STUMP S 70° 15' W 63 LINKS (41.6') STUMPS CUT LOW AND FACE ROTTED, NO SCRIBE VISIBLE, POINT FALLS IN OLD SKID ROAD.



SEE ENLARGED VIEW OF THIS AREA BELOW, RIGHT.

FOUND 1" I.P. AS PER B.T. RECORD JULY 21, 1982. ALSO 1 1/4" AXLE, NO RECORD.

## CORRECTION MAP FOR MAP DRAWN MARCH 4, 1985. *Clarence Pace* COUNTY SURVEY RECORD NO. 3465.

### NARRATIVE:

INTENT; TO LOOK FOR AND CONSIDER EVIDENCE TO LOCATE ORIGINAL CORNER, FOR THE N.W. CORNER OF SECTION 13, T4N, R5W, W.M. COLUMBIA COUNTY, OREGON.

REFERENCE DATA: ALL SURVEYS OF RECORD NEAR OR ADJACENT, SUPPLIED BY THE COUNTY SURVEYOR.

B.T. RECORDS, DATE 3-23-1898

10-22-1946

7-21-1982

ORIGINAL FIELD NOTES, FEB. 1877

FOR THE ORIGINAL LOCATION I FOUND A 80" FIR STUMP IN A GROVE OF SMALL HEMLOCK STUMPS (12"-24") AS CALLED FOR IN FIELD NOTES, FEB. 1877, I SET A 5/8" X 30" I.R. FOR THE N.W. CORNER OF SECTION 13, N 45° W 13.2' (20 LINKS) FROM 80" FIR STUMP (FACE).

I RAN A RANDOM LINE NORTH TO TIE IN I.P. SAID TO BE THE SOUTH 1/16TH CORNER BETWEEN SECTIONS 11 AND 12, AND WEST TO THE SOUTHWEST CORNER OF SECTION 11, RAN RANDOM LINE EAST TO I.P. ACCEPTED AS THE 1/4 CORNER BETWEEN SECTIONS 12 AND 13, I RAN SOUTH TO I.R. SET IN SURVEY 3329 FOR THE NORTH 1/16 CORNER BETWEEN SECTIONS 13 AND 14, FOUND DIMENSIONS SHOWN IN SURVEY 3329 TO BE ACCURATE AND CALCULATED LOCATION OF NORTH 1/16TH CORNER BETWEEN SECTIONS 13 AND 14, SET 5/8" X 30" I.R. AT 1/2 WAY BETWEEN THE NW CORNER AND THE WEST 1/4 CORNER OF SECTION 13.

### CONTINUE NARRATIVE

I SET A 5/8" X 30" I.R. ON THE NORTH LINE OF SECTION 13, 1026.00' EAST OF THE SECTION CORNER FOR PROPERTY CORNER, TO LOCATE THE NORTH LINE OF SECTION 13.

### ADDITIONAL WORK, MARCH 17, 1986.

SET A 1 1/2" X 36" IRON PIPE OVER 5/8" I.R. SET FOR N.W. CORNER OF SECTION 13.

ESTABLISHED FOUR BEARING TREES.

A 8" HEMLOCK, N 40° W 12.33' SCRIBED

T4N, R5W, S11, BT.

A 8" HEMLOCK, N 36° E 12.25' SCRIBED

T4N, R5W, S12, BT.

A 16" ALDER, S 71° E 12.66' SCRIBED

T4N, R5W, S13, BT.


A 29" CEDAR S 25° W 27.50' SCRIBED

T4N, R5W, S14, BT.

DISTANCE MEASURE TO CENTER OF B.T.

FD 1" I.P. SEE SURVEY 3329

S 55° 06' 38" E 66.51

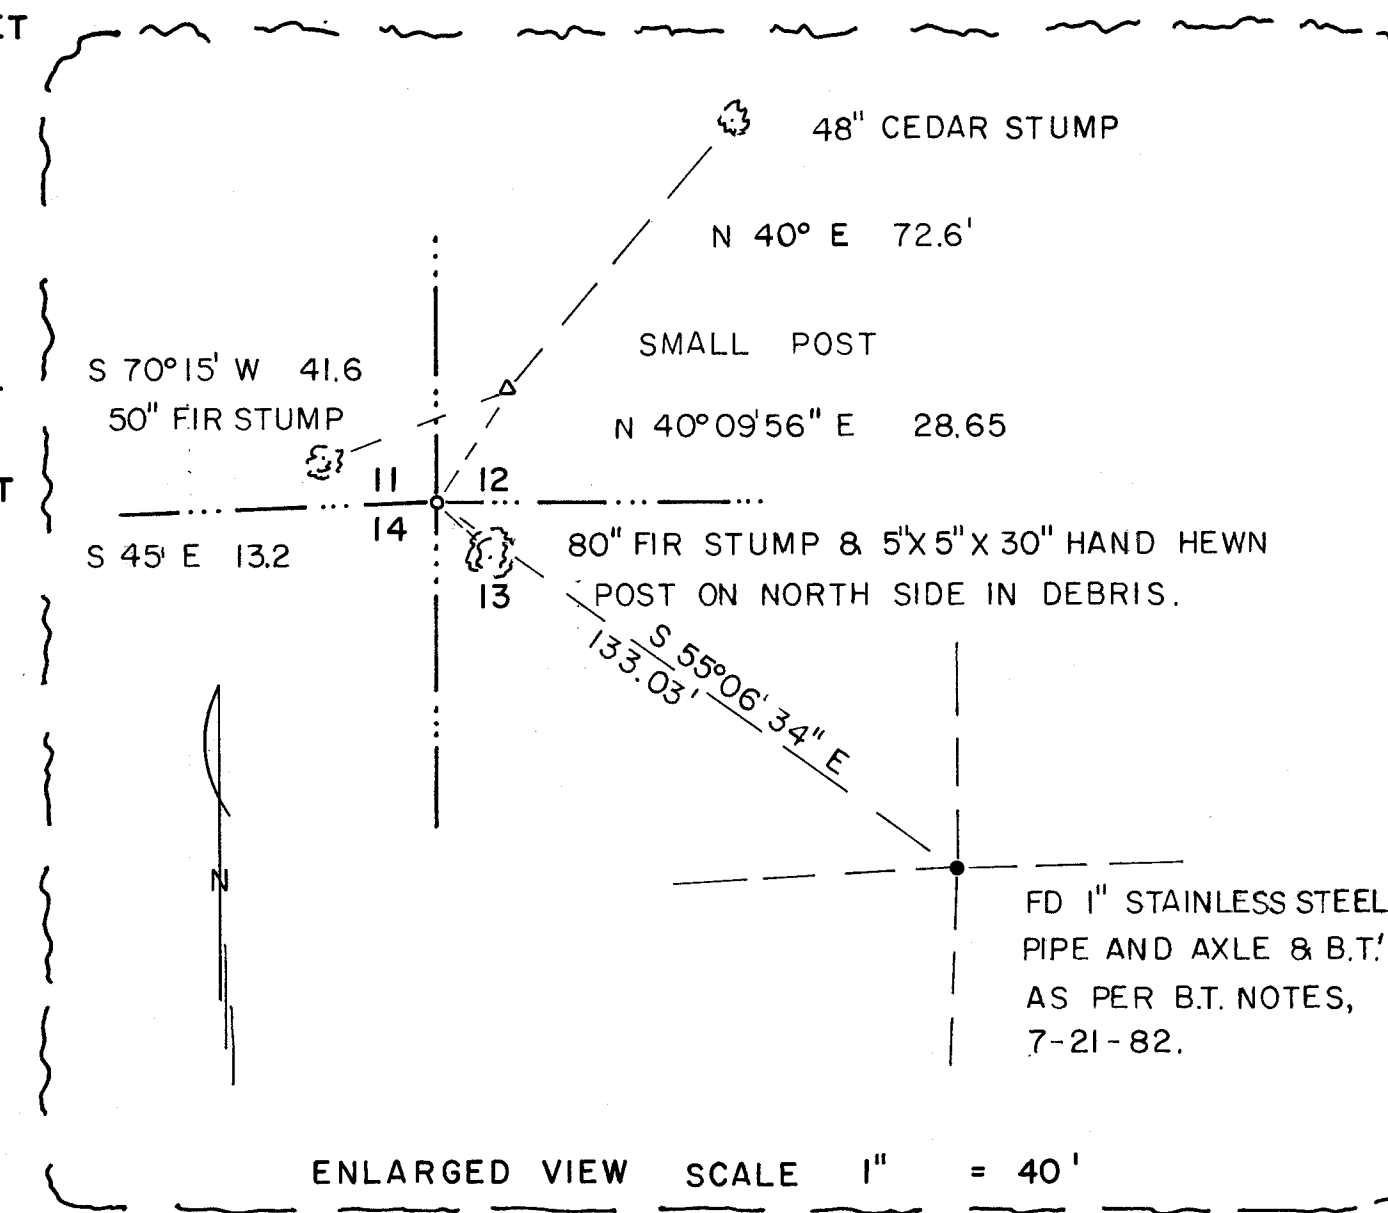

SCALE 1" = 200'

• CORNERS FD. AS NOTED.

○ 5/8" X 30" I.R. SET WITH YELLOW PLASTIC CAP NO. 704 (RECORD DIS. OR BEAR.)


14 13 WEST 1/4 CORNER SECTION 13

SURVEY AND MAP BY  
C PACE & ASSOCIATES  
738 N. ADAIR NO. 15  
CORNELIUS, OREGON.  
PHONE 357-9697

COUNTY SURVEYOR

DATE 3-4-86

FILED 4-9-86



3520