



60LE

COLUMBIA COUNTY SURVEYOR
RECEIVED 2-8-91
ACCEPTED FOR FILING

RECORD OF SURVEY
for TOM LAW, AL DELEMOS,
AND ARNOLD TOLONEN
IN THE NE 1/4 NW 1/4 SEC. 8
T.4N., R.4W., W.M.
COLUMBIA COUNTY, ORE.
SCALE 1"=200' JAN 2, 1991



3709

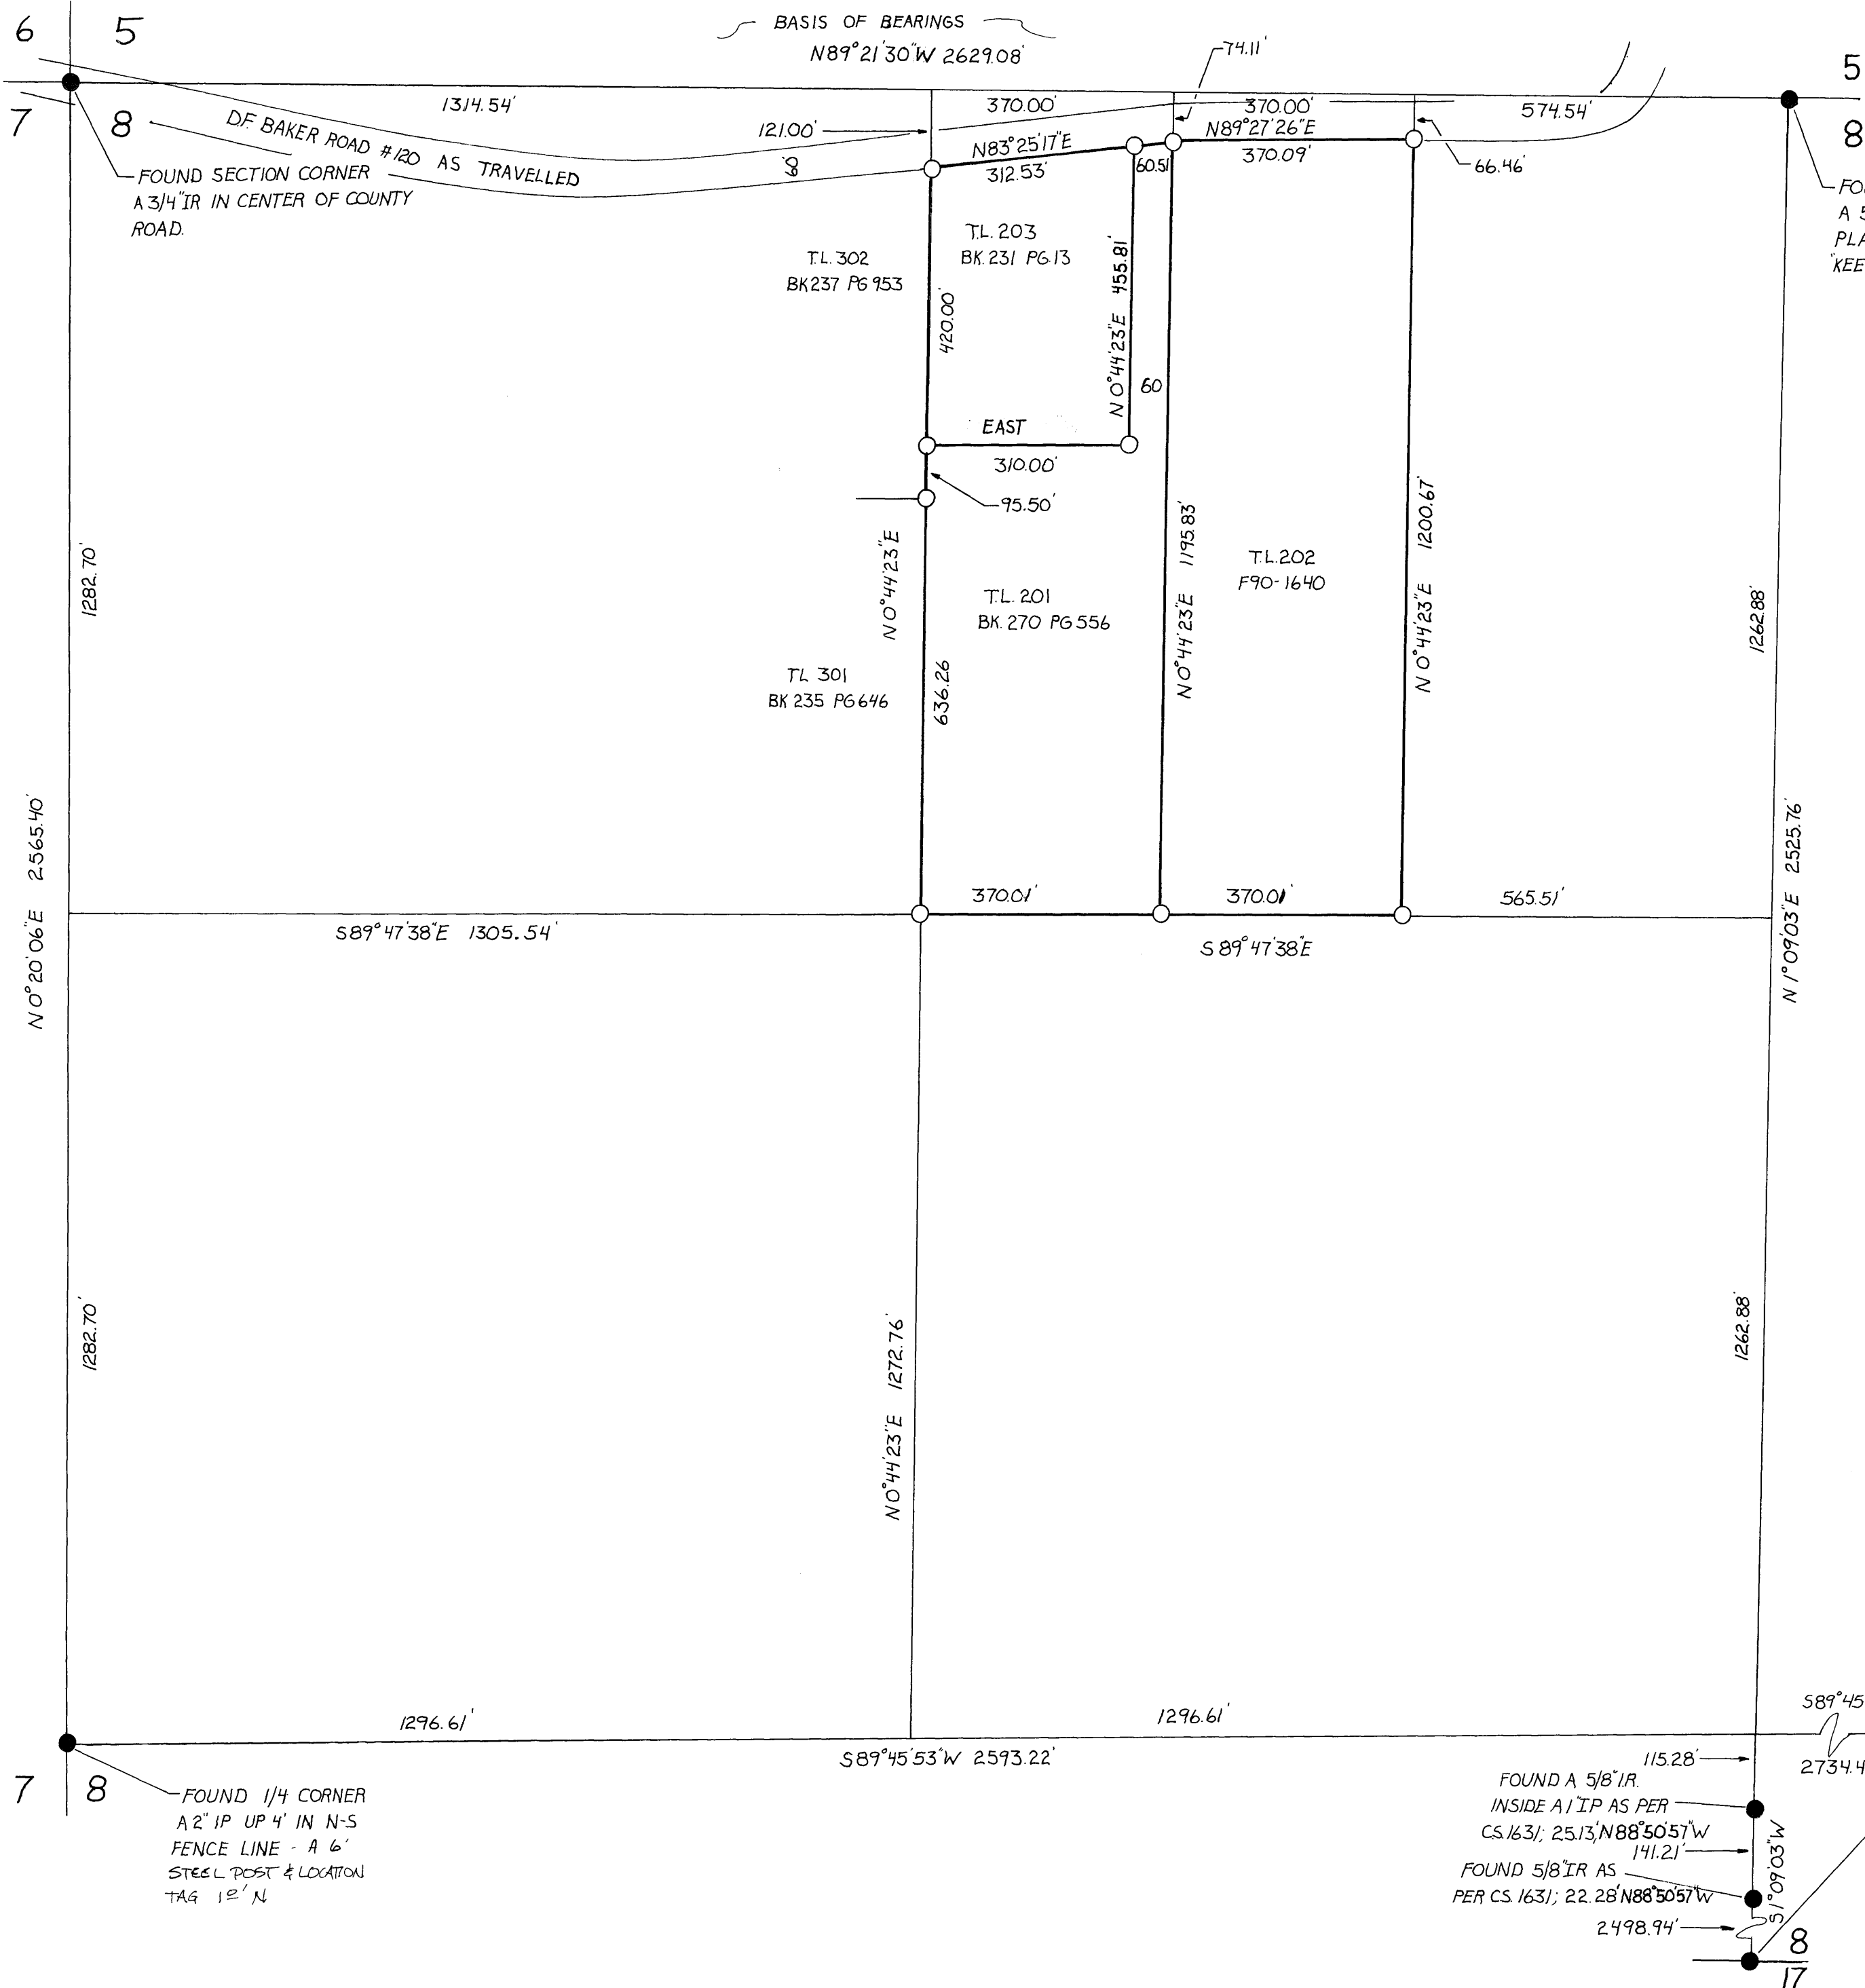

NARRATIVE

1. THE PURPOSE OF THIS SURVEY WAS TO MONUMENT TAX LOTS 201, 202, AND 203. THE EAST LINES OF THE LOTS WERE HELD PARALLEL TO AND AT THE DEEDED DISTANCE FROM THE WEST LINE OF THE NE 1/4 NW 1/4. THE NORTH LINE OF THE LOTS WAS ESTABLISHED 30' SOUTH OF THE TRAVELLED CENTER LINE OF D.F. BAKER ROAD #120.
2. CONTROL IS FROM RECOVERED GOVERNMENT CORNERS AT THE N 1/4, S 1/4, E 1/4, W 1/4 AND THE NW SECTION CORNER.
3. THE BASIS OF BEARINGS IS THE NORTH LINE OF THE NW 1/4, FROM C.S. # L-102


LEGEND

- - MONUMENT FOUND AS NOTED
- MONUMENT SET A 5/8" x 30" I.P. WITH YELLOW PLASTIC CAP MARKED "L. JERRY KEENON PLS 1080"
- PROPERTY LINE MARKED WITH PINK RIBBON

FIELD CREW:

DON WALLACE (LSIT)
JOHN FULTS
SHAWN STEVENS

L. JERRY KEENON
1311 ALDER ST.
VERNONIA, OREGON 97064
PH # 429-6115

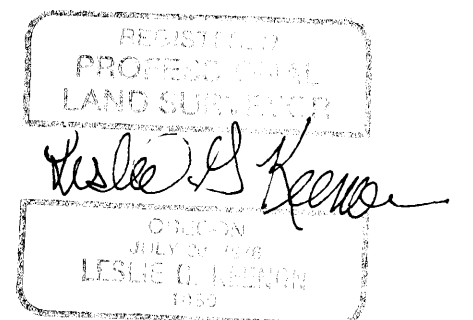

COUNTY CLERK
RECEIVED 2-8-91
FILED 4-3-91
CS # 3709

DRAWN BY: DON WALLACE

3709