

COUNTY SURVEYOR

RECEIVED 10-31-86

FILED 11-5-86 G.D.

NARRATIVE:
THE PURPOSE OF THIS SURVEY
IS TO STAKE THE 2.00 ACRE
PARCEL.

FOR CONTROL I HELD THE
5/8" IR AT THE SE CORNER OF
THE NW 1/4 OF THE SE 1/4.
I CALCULATED THE SW CORNER OF
THE NW 1/4 OF THE SE 1/4 FROM
C.S. #2101. I CALCULATED THE
NE CORNER OF THE NW 1/4
OF THE SE 1/4 BY PROPORTION-
ING MAP DISTANCES FROM
C.S. 3054 FROM THE IRON
BAR TO THE 5/8" IR.
I SET THE CORNERS AS
SHOWN.


● DENOTES 5/8"x36" I.R.
WITH PLASTIC CAP
MARKED "PHIL DEWEY
L.S. 847" SET

○ DENOTES MONUMENT
FOUND AS NOTED

5/8" I.P. FD. N1°59'E 35.9
FROM
IR C.S. 2101

51°59'E
35.9

587°53'N

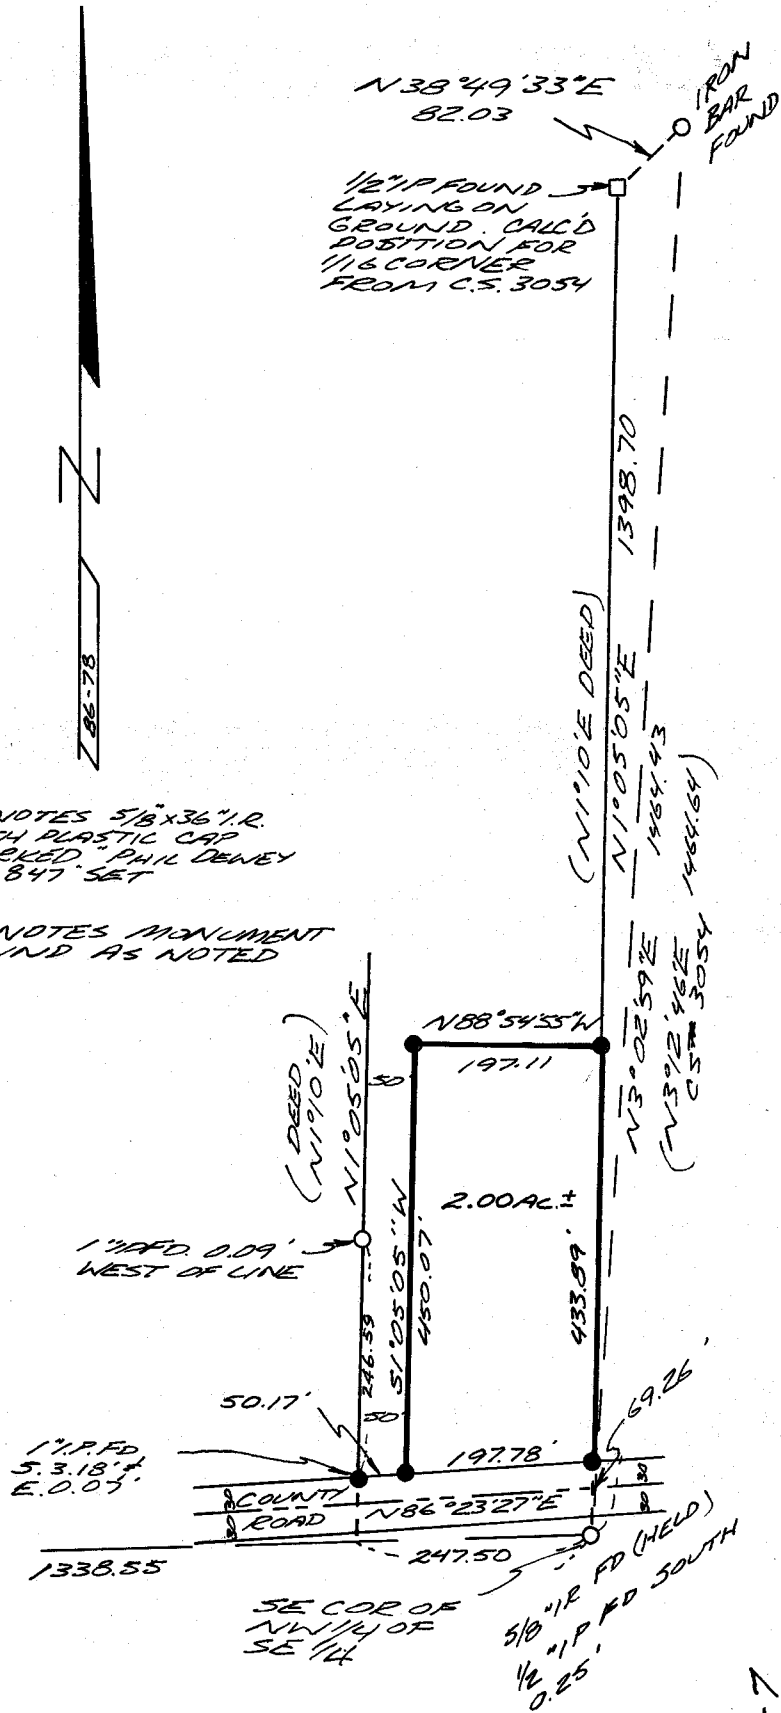

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 12, 1968
PHILIP DEWEY
847

PHILIP DEWEY
LAND SURVEYOR
COURTHOUSE
ST. HELENS, OR 97051

BASIS OF BEARING E-W of SE
1/4 AS CALC. FROM C.S. #176

REFERENCE MAP No. 176

REFERENCE MAP No. 2101

REFERENCE MAP No. 3054

WORK MAP No. 189

FIELD BOOK 221 PAGE 9-11

FIELD BOOK _____ PAGE _____

DEED REF. D. B. 258 PAGE 402

DEED REF. D. B. _____ PAGE _____

SURVEY FOR

RICHARD & SUNNY HUNTEMAN

LOT _____ BLOCK _____

SUBDIVISION _____

DONATION LAND CLAIM _____

IN THE NW 1/4 OF THE SE 1/4 OF

SECTION 5 T. 4 N., R. 4 W., W. M.

COLUMBIA COUNTY, OREGON.

DATE SEPT., 1986 Scale: 1" = 200 ft.