


8" FIR S43°W AT 17 LINKS

NOTED ON SURVEY. CORNER SEARCHED FOR NOT FOUND.

AUGUST 15, 2016

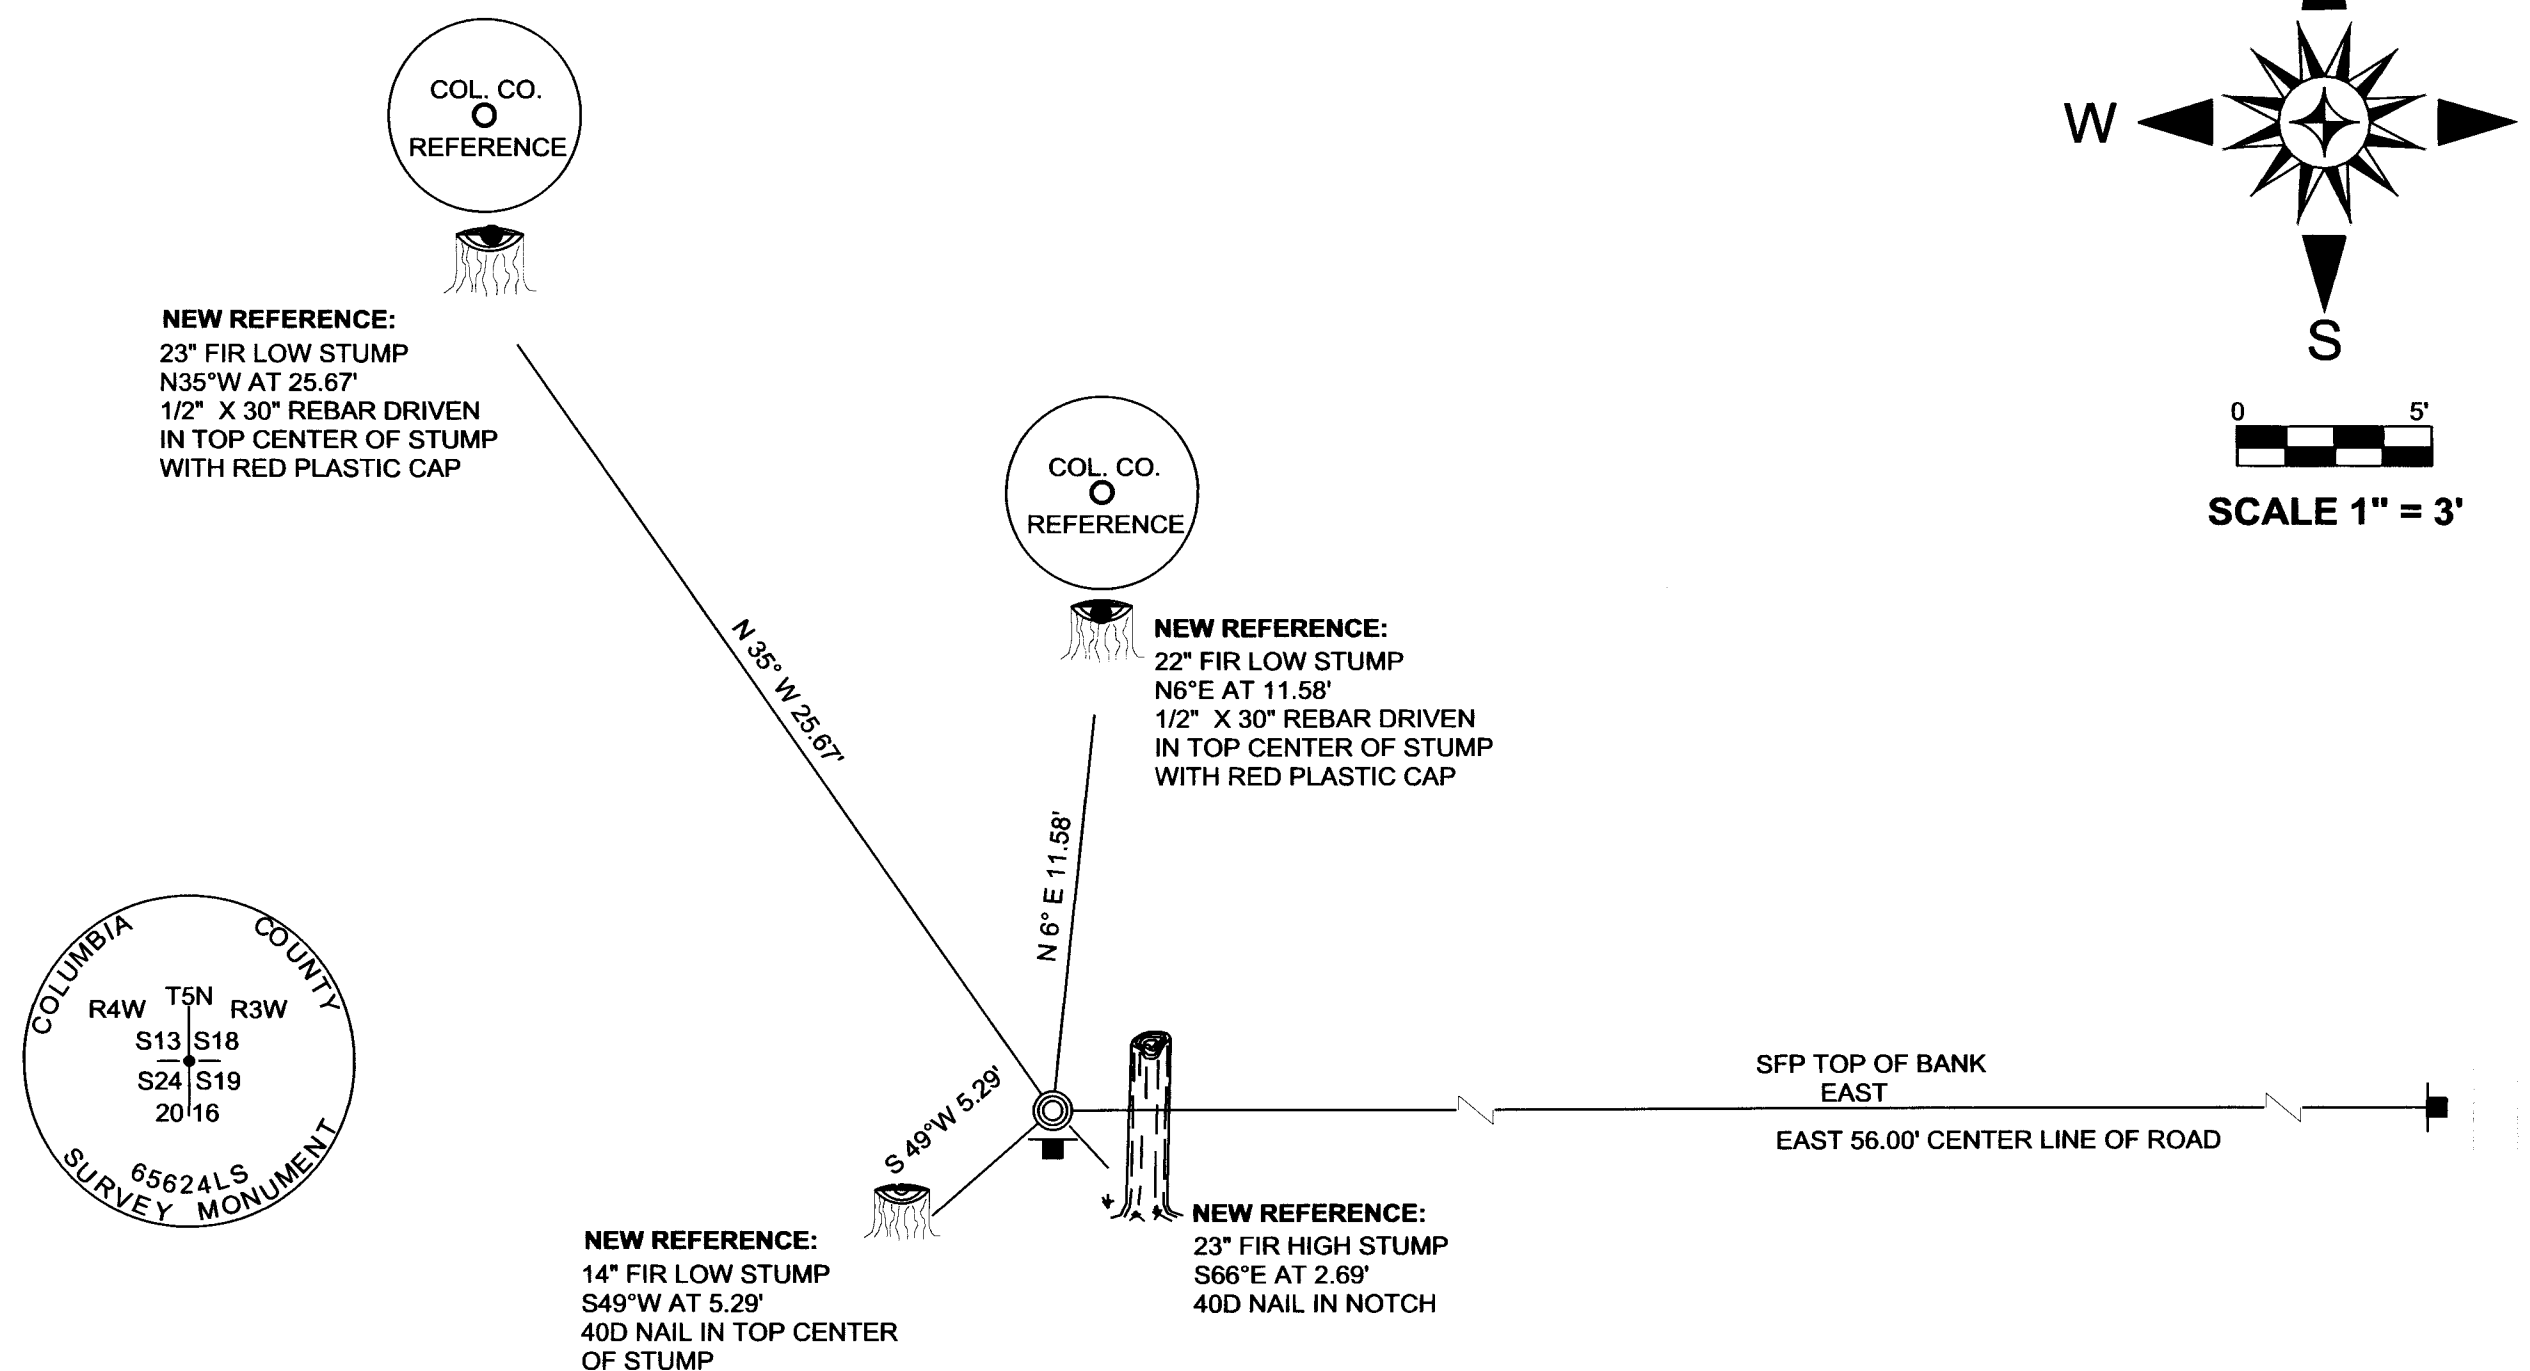

● SET 1/2" X 30" REBAR WITH RED PLASTIC CAP
MARKED "COL. CO. REFERENCE"

◎ SET 1 1/4" X 30" GALVANIZED IRON PIPE
WITH 3 1/4" ALUMINUM CAP STAMPED AS SHOWN

┐ STEEL FENCE POST SOUTH 1.0'

┘ STEEL FENCE POST EAST AT 24.9'

THE PURPOSE OF THIS CORNER RESTORATION WAS TO ADD ADDITIONAL REFERENCES FOR THE LOCATION OF THE SECTION CORNER COMMON TO SECTION 18, 19, 13, AND 24, TOWNSHIP 5 NORTH RANGE 3 AND 4 WEST. THE REHAB OF CORNER WAS PERFORMED TO PERPETUATE THE LOCATION OF ORIGINAL GOVERNMENT LAND CORNER SET DURING GLO CONTRACT #50. WE ALSO ESTABLISHED GPS COORDINATES AS PART OF AN ON GOING GIS MAPPING PROJECT FOR COLUMBIA COUNTY. WE SET A 1 1/4" GALVANIZED IRON PIPE OVER EXISTING FOUND 1" STAINLESS STEEL PIPE. A 3 1/4" ALUMINUM CAP STAMPED AS SHOWN ABOVE FIRMLY ATTACHED TO TOP OF NEW PIPE.

N 828792.33 E 7536964.21 (IFT)



230 Strand ST.
ST. Helens, OR 97051
(503) 397-2322

**COLUMBIA COUNTY SURVEYOR'S OFFICE
CORNER RESTORATION SURVEY**

FIELD CREW

Nathan A. Woodward

David Leader Jr

:

CHECKED BY:

Nathan A. Woodwa

Nathan A. Woodward

FIELD BOOK: NAW2017 PG. 7

FIELD BOOK: NAW2017 (U.S.)

SCALE: | DATE:

5 Ft/In | AUGUST 15, 2010

DRAFTED BY:	SHI
-------------	-----

Robert L. Johnson	1
-------------------	---

ROBERT E. JOHNSON	17
-------------------	----

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Phil A. Woods

OREGON
NATHAN A. WOODWARD
JULY 12, 2005
65624LS

EXPIRES: 06/30/2018