


9664

4996

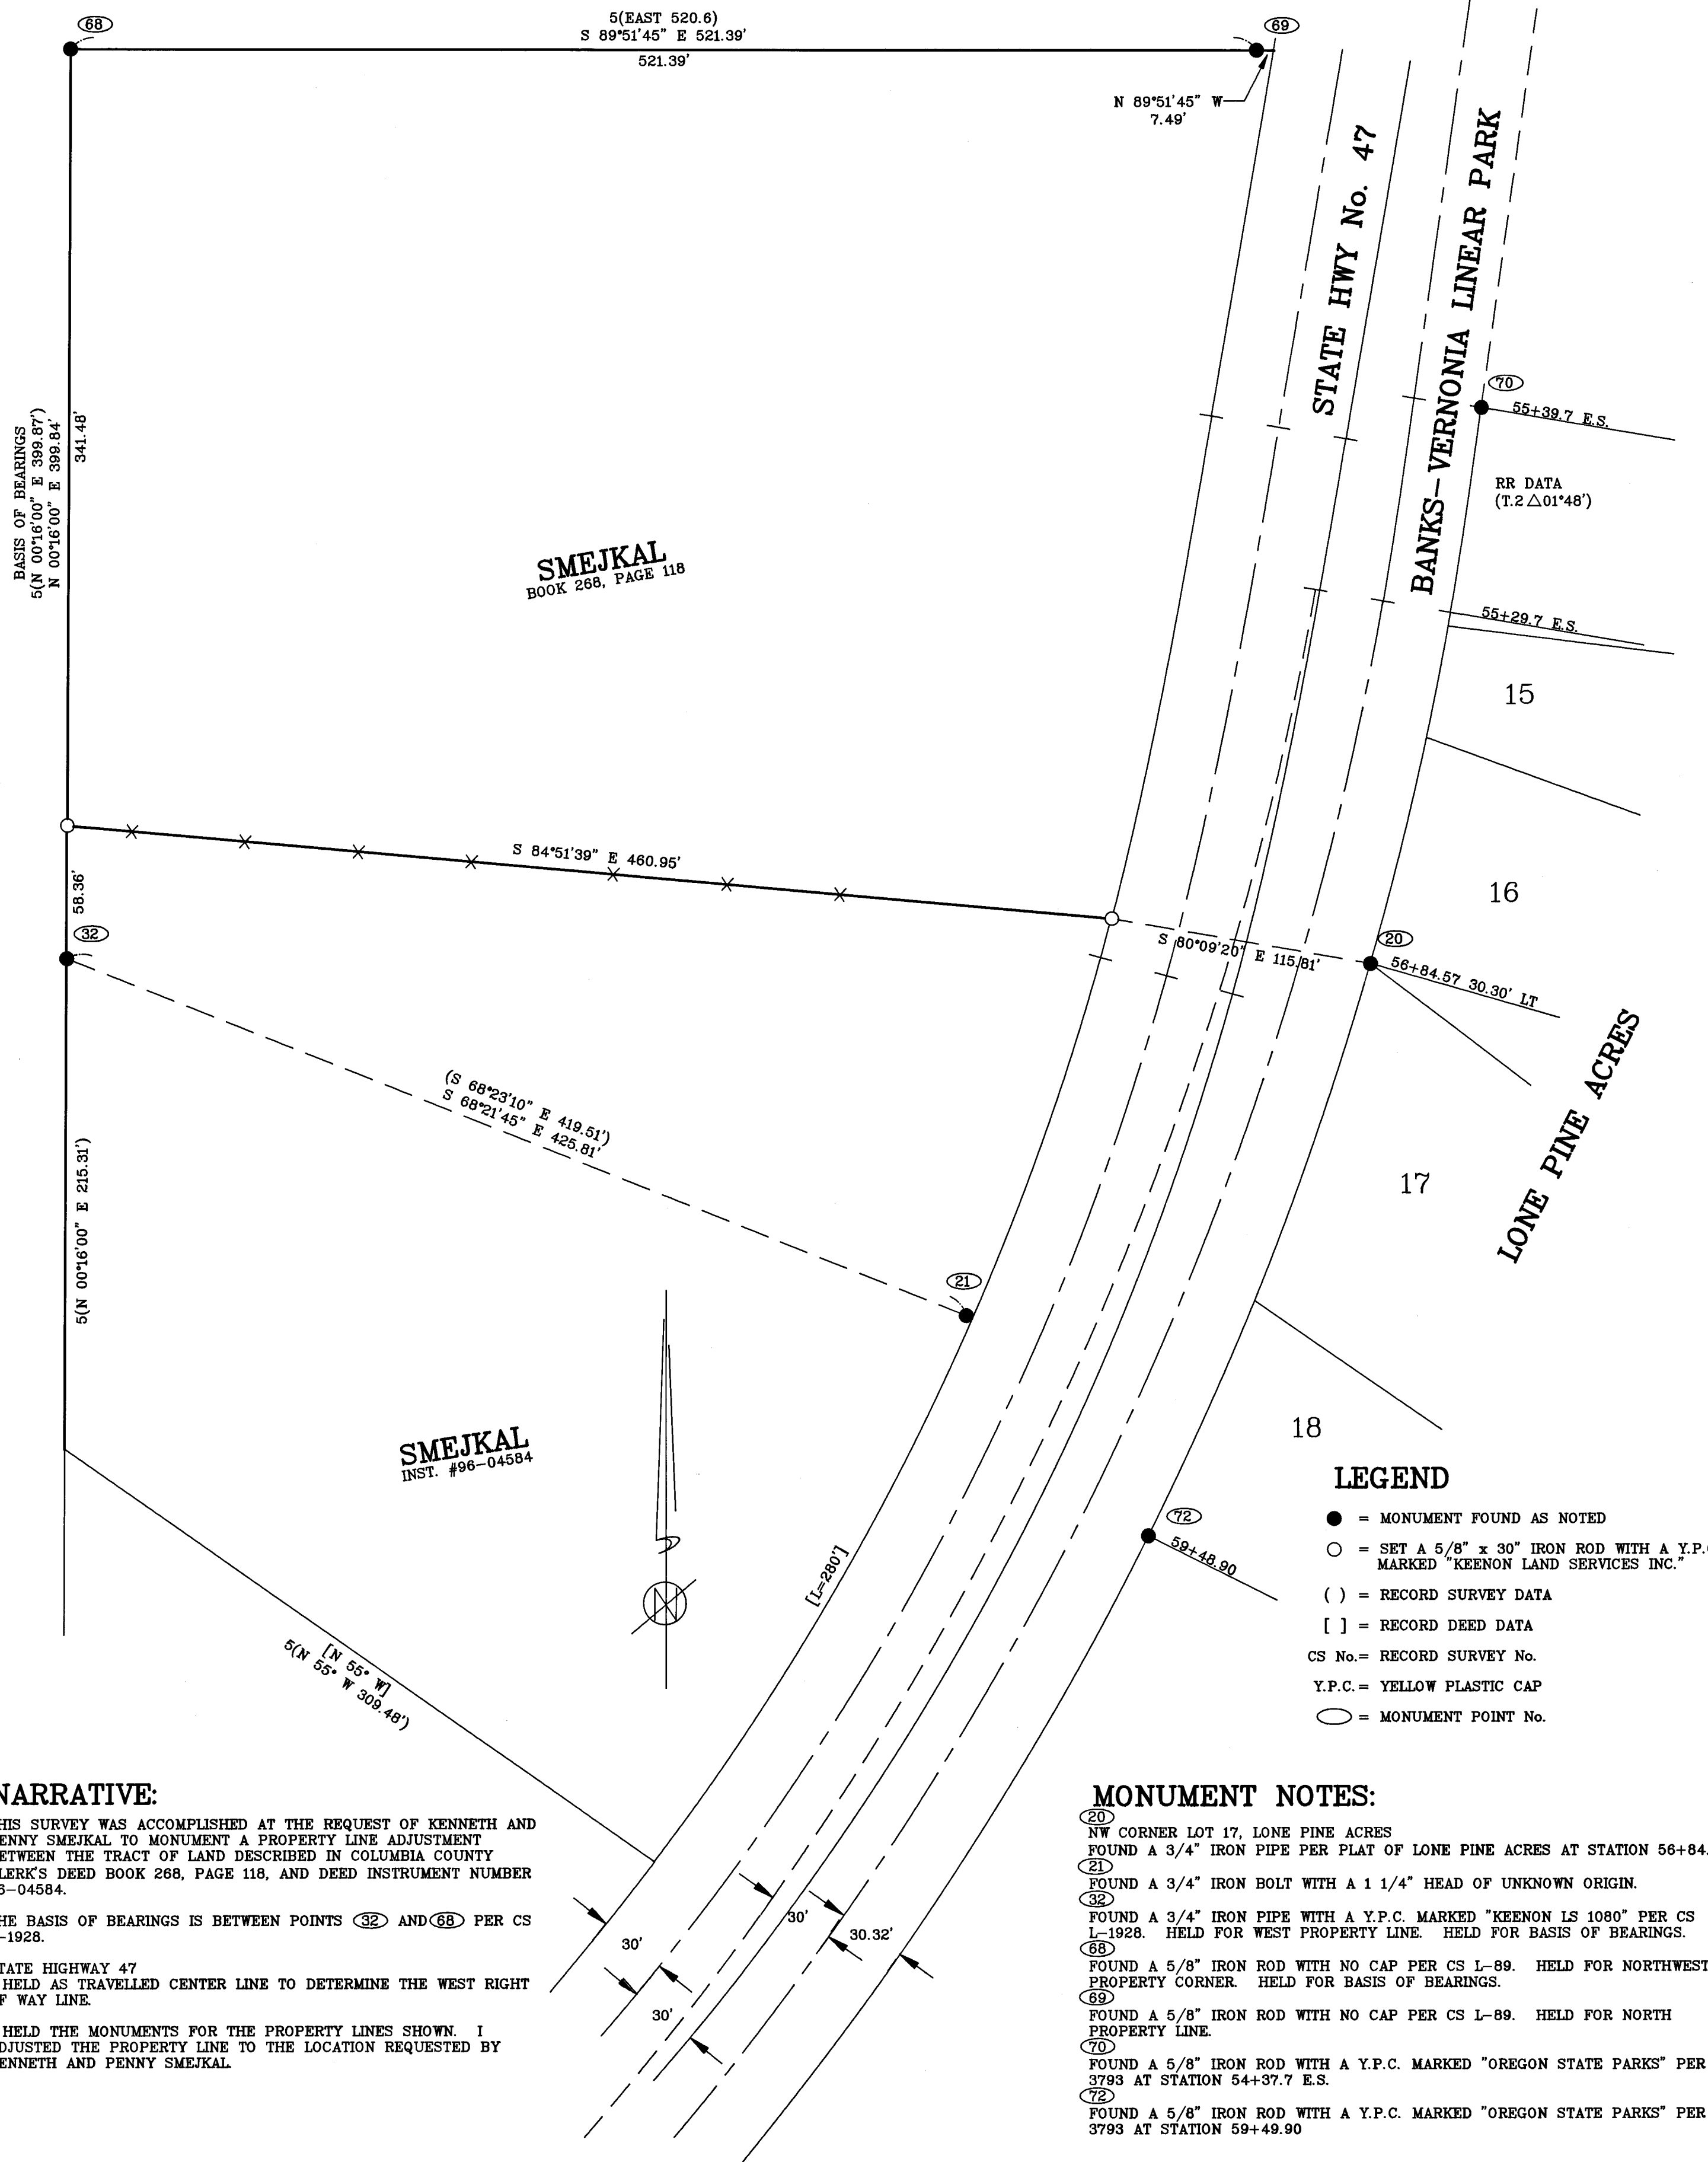

**NARRATIVE:**

THIS SURVEY WAS ACCOMPLISHED AT THE REQUEST OF KENNETH AND PENNY SMEJKAL TO MONUMENT A PROPERTY LINE ADJUSTMENT BETWEEN THE TRACT OF LAND DESCRIBED IN COLUMBIA COUNTY CLERK'S DEED BOOK 268, PAGE 118, AND DEED INSTRUMENT NUMBER 96-04584.

THE BASIS OF BEARINGS IS BETWEEN POINTS (32) AND (68) PER CS L-1928.

STATE HIGHWAY 47  
I HELD AS TRAVELLED CENTER LINE TO DETERMINE THE WEST RIGHT OF WAY LINE.

I HELD THE MONUMENTS FOR THE PROPERTY LINES SHOWN. I ADJUSTED THE PROPERTY LINE TO THE LOCATION REQUESTED BY KENNETH AND PENNY SMEJKAL.

**MONUMENT NOTES:**

- (20) NW CORNER LOT 17, LONE PINE ACRES  
FOUND A 3/4" IRON PIPE PER PLAT OF LONE PINE ACRES AT STATION 56+84.57.
- (21) FOUND A 3/4" IRON BOLT WITH A 1 1/4" HEAD OF UNKNOWN ORIGIN.
- (32) FOUND A 3/4" IRON PIPE WITH A Y.P.C. MARKED "KEENON LS 1080" PER CS L-1928. HELD FOR WEST PROPERTY LINE. HELD FOR BASIS OF BEARINGS.
- (68) FOUND A 5/8" IRON ROD WITH NO CAP PER CS L-89. HELD FOR NORTHWEST PROPERTY CORNER. HELD FOR BASIS OF BEARINGS.
- (69) FOUND A 5/8" IRON ROD WITH NO CAP PER CS L-89. HELD FOR NORTH PROPERTY LINE.
- (70) FOUND A 5/8" IRON ROD WITH A Y.P.C. MARKED "OREGON STATE PARKS" PER CS 3793 AT STATION 54+37.7 E.S.
- (72) FOUND A 5/8" IRON ROD WITH A Y.P.C. MARKED "OREGON STATE PARKS" PER CS 3793 AT STATION 59+49.90

**REFERENCE SURVEYS**

- 1 = CS No. L-89
- 2 = CS No. L-490
- 3 = CS No. L-795
- 4 = CS No. L-1310
- 5 = CS No. L-1928
- 6 = CS No. L-2176
- 7 = CS No. B-169
- 8 = CS No. 3793
- 9 = PLAT OF LONE PINE ACRES

<p>REGISTERED PROFESSIONAL LAND SURVEYOR</p> <p><i>Leslie G. Keenon</i></p> <p>OREGON JULY 30, 1976 LESLIE G. KEENON 1080 RENEWAL DATE 6/30/03</p>	<p>KEENON LAND SERVICES</p> <p>1224 ALDER ST. VERNONIA, OR 97064 (503) 429-6115</p>	<p>PROPERTY LINE ADJUSTMENT</p> <p><b>KENNETH AND PENNY SMEJKAL</b> <b>IN THE NE 1/4 OF SECTION 8,</b> <b>T4N, R4W, W.M.</b> <b>COLUMBIA COUNTY, OREGON</b> <b>SCALE 1" = 50'      SEPT. 14, 2002</b></p>		<p>COLUMBIA COUNTY SURVEYORS OFFICE</p> <p>RECEIVED <u>10-22-02</u></p> <p>ACCEPTED <u>11-4-02</u></p> <p>✓ 109</p>
		<p>DRAWN BY: VSS      FIELD: VSS/MWM      EQUIPMENT: GTS300/TDS48      JOB No. 02-005 SURVEY PROJECT No. 02-005      REVISED: 6/11/02</p>		

9664

4996