


RECORD OF SURVEY
SW 1/4, SEC 8, T4N, R4W, WM
COLUMBIA COUNTY, OREGON

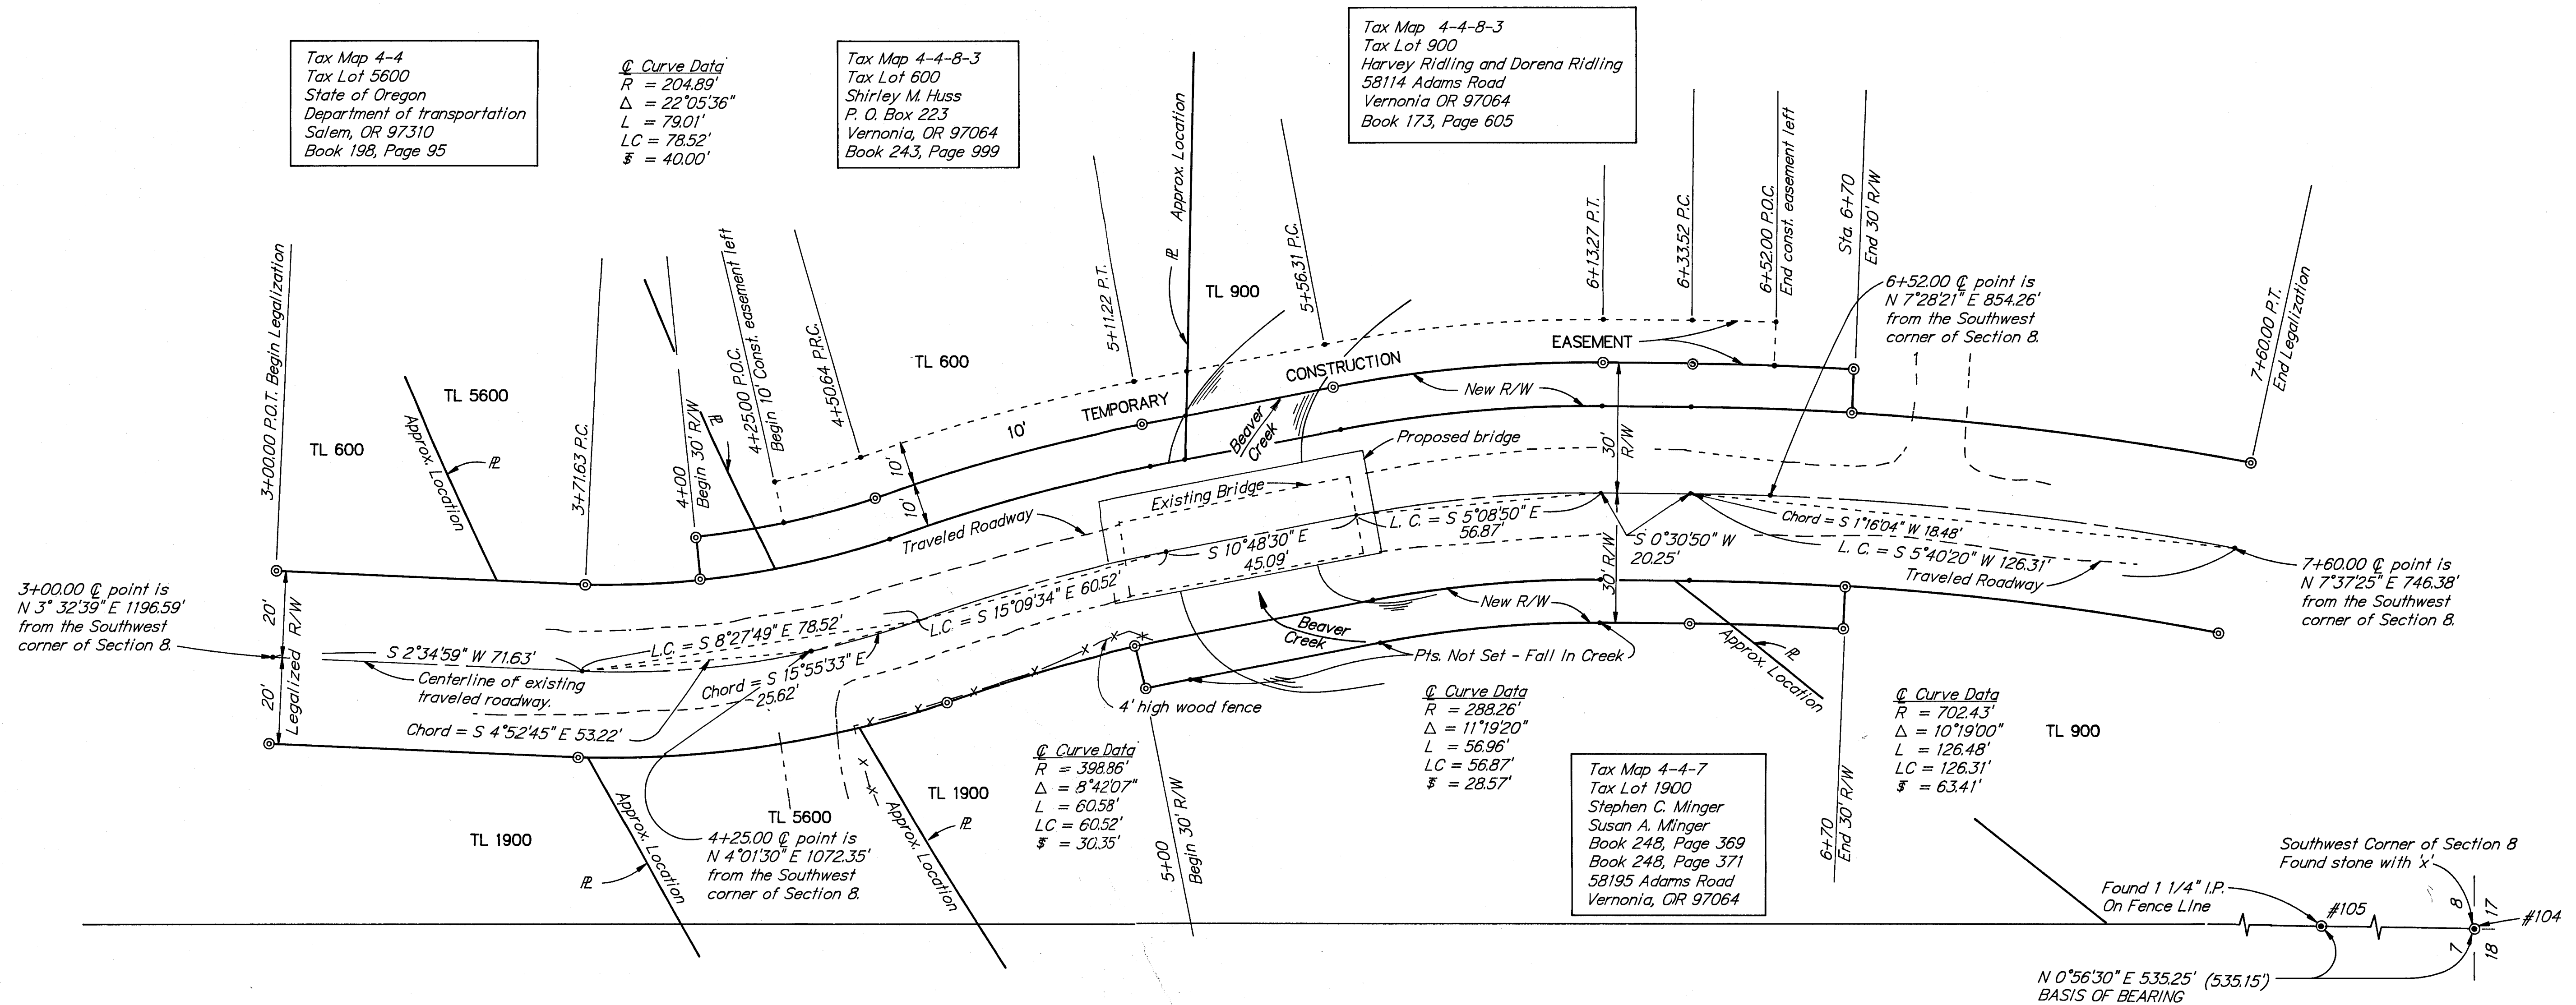

REFERENCES

- Survey for Delbert Allen and Don Huss, dated February 15, 1985, by Clarence Pace, Columbia County Surveyors file number 3475.
- Survey for Ralph Jr. and Longview Fibre Co., dated December 23, 1985, by Richard A. Morris, Columbia County Surveyors file number 3491.

LEGEND



- Set 5/8" x 30" rebar w/plastic cap "OBEC LS1937" on 12-8-88
- Found monument as noted
- () Data of record

NARRATIVE

The preliminary line survey was performed during December of 1985, December of 1986 and January of 1987. The purpose of the survey was to determine the existing right-of-way of J. H. Adams Road #118 in the vicinity of the bridge over Beaver Creek. The road was originally established and surveyed in September of 1895 by W. N. Meserve, County Surveyor. The petition, acceptance and survey of said road can be found in the official County Road file in the clerks office of Columbia County. The road is specifically documented as being 40 feet in width.

This survey depicts the legalization of J. H. Adams Road within the project limits for the new bridge over Beaver Creek. The basis for legalization as per O.R.S. 368.201; the road as traveled and used for 10 years or more does not conform to the location of the road described in county records.

The basis of bearing for this survey is based on the Southwest Corner of Section 8 and point #105 as shown on a survey for Delbert Allen and Don Huss dated February 15, 1985 by Clarence Pace, recorded in Columbia County Surveyors File #3475.

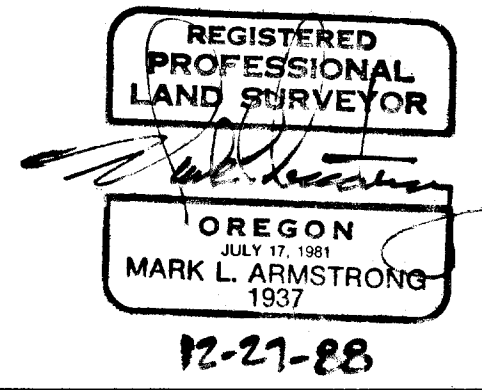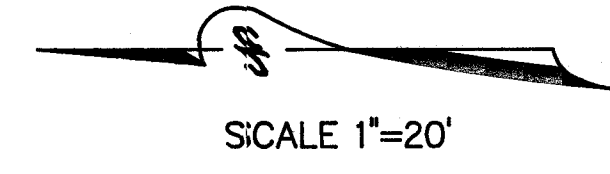

APPROVED BY: *[Signature]*
TITLE: Chief Engineer

REV.	DESCRIPTION	BY	DATE

OBEC Consulting Engineers
244 COUNTRY CLUB ROAD
EUGENE, OREGON 97401 (503)683-6090

SURVEY FOR J.H. ADAMS ROAD
RIGHT-OF-WAY

SURVEY FOR COLUMBIA COUNTY ROAD DEPT.

DESIGNED: M.L. ARMSTRONG	PROJ. NO. 109-35	SHT. 1 OF 1
DRAWN: W.S.R.	CHKD: W.S.R.	FILE NO.