


THE PURPOSE OF THIS SURVEY WAS TO FLAG THE NORTH LINE OF THE SOUTH $\frac{1}{2}$ OF THE NW $\frac{1}{4}$ OF SEC. 18. I FOUND A BRIDGE SPIKE AT THE NORTH $\frac{1}{4}$ COR. (SEE C.S. MAP # L-1036), A 2" I.P. AND ORIG. BT STUMP AT THE NW SEC. COR. AND A STONE WITH A $1\frac{1}{2}$ " I.P. BESIDE IT AT THE WEST $\frac{1}{4}$ COR. I ACCEPTED THESE AS THE TRUE CORNERS. I FOUND A $5\frac{1}{8}$ " I.R. S3°24'E 1291.14' OF THE NORTH $\frac{1}{4}$ COR. THIS IR WAS SET FOR THE $\frac{1}{16}$ COR., SEE C.S. MAP # 3491. HOWEVER THERE IS A LARGE DIFFERENCE IN THE LOCATION OF THE SOUTH $\frac{1}{4}$ COR. BETWEEN MAPS 3491 AND 2946. THERE IS ALSO A DIFFERENCE OF 21.69' BETWEEN THE E $\frac{1}{4}$ COR. SET ON MAP 3491 AND THE $\frac{1}{4}$ COR. RESTORED BY THE CO. SURVEYOR. IF THE CO. SURVEYOR'S $\frac{1}{4}$ COR. WAS HELD THE $\frac{1}{16}$ COR. WOULD BE ABOUT 2 FEET SOUTH OF THE $5\frac{1}{8}$ " I.R. IF THE SOUTH $\frac{1}{4}$ COR. AS SHOWN ON MAP 2946 WAS HELD THE $\frac{1}{16}$ COR. WOULD BE ABOUT 44 FEET EAST OF THE $5\frac{1}{8}$ " I.R. I HELD THIS $5\frac{1}{8}$ " I.R. AS AN APPROX. POINT ON LINE AND FLAGGED A LINE FROM THIS $5\frac{1}{8}$ " I.R. TO THE 1" I.P. I SET AT THE N.W. CORNER OF THE SOUTH $\frac{1}{2}$ OF THE N.W. $\frac{1}{4}$. THERE IS AN OLD FENCE RUNNING EASTERLY FROM THE 2" I.P. AS SHOWN. THIS FENCE MAY HAVE BEEN USED AS THE PROPERTY LINE

JERRY CORNWALL-BRADY
101 ST. HELENS STREET
ST. HELENS ORE. 97051
PHONE 397-4115

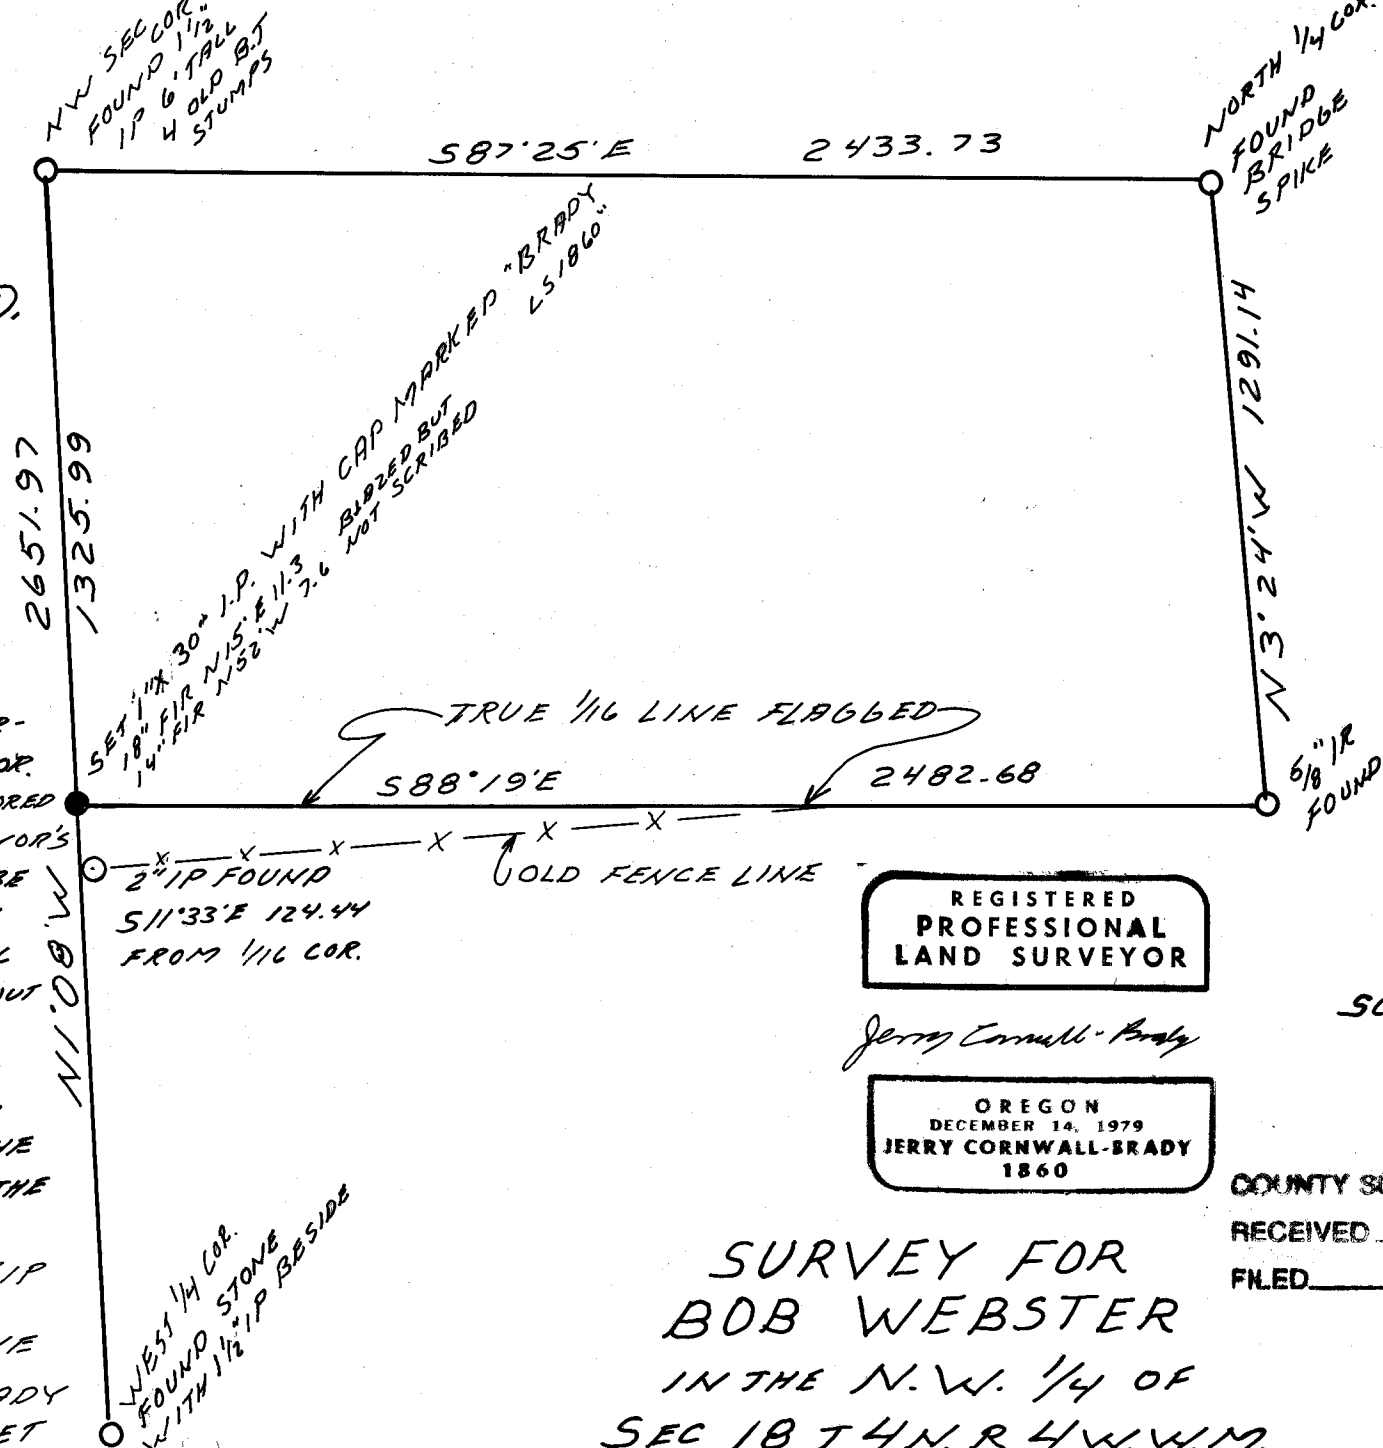

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jerry Cornwall-Brady

OREGON
DECEMBER 14, 1979
JERRY CORNWALL-BRADY
1860

COUNTY SURVEYOR

RECEIVED 8/2/89

FILED

SURVEY FOR
BOB WEBSTER
IN THE N.W. $\frac{1}{4}$ OF
SEC 18 T4N.R.4W.W.M.
COLUMBIA COUNTY ORE.
JUNE 20 1989