


L-1668

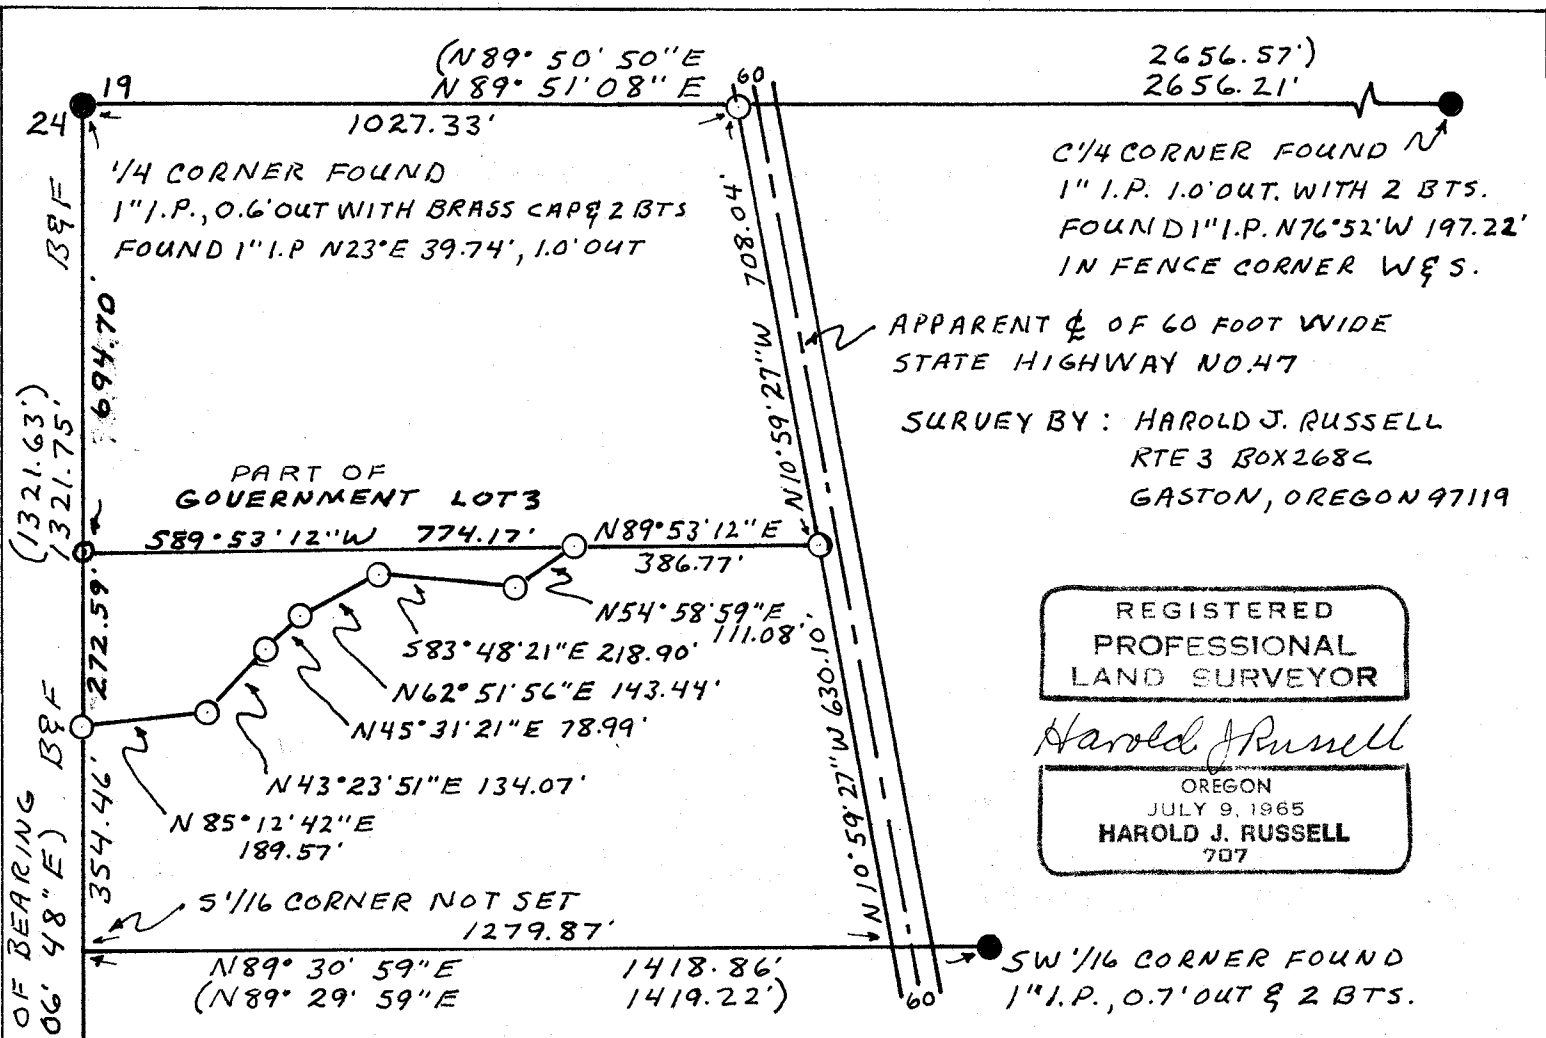

RECORD OF SURVEY FOR:
M.P. JOHANSEN & PUBLISHER PAPER CO.
IN THE
SW 1/4 OF SECTION 19, T.4N., R.4W., W.M.
COLUMBIA COUNTY, OREGON
MAY 24, 1983

FOUND 5/8" ROD, 1.0' OUT
BEARS NO. 18° 51' E
690.53' FROM SEC. COR.

FOUND 5/8" ROD, 0.5' OUT
BEARS NO. 20° 09' E
662.44' FROM SEC. COR.

FOUND 5/8" ROD, 0.2' OUT
BEARS N1° 27' 53" E
214.64' FROM SEC. COR.

24 19
25 30
SECTION CORNER FOUND
3/4" I.P., 0.4' OUT WITH BRASS CAP
AND BEARING TREES

- = MONUMENTS FOUND AS NOTED
- = SET 5/8" X 30" IRON ROD [0.2' OUT] WITH YELLOW PLASTIC CAP MARKED "RUSSELL - PLS 707"
- () = DATA FROM SURVEY PLAT NO. 3250
- B&F = BLAZED BOTH SIDES OF BOUNDARY LINE AND FLAGGED LINE

COUNTY SURVEYOR
RECEIVED 6-29-83
FILED 6-30-83



SCALE: 1" = 300 FT.

NARRATIVE: PURPOSE OF THE SURVEY WAS TO RELOCATE THE PROPERTY LINE BETWEEN THE TWO PROPERTY OWNERS OF THAT PORTION OF GOVERNMENT LOT 3, SECTION 19, T.4N., R.4W., W.M., LYING WESTERLY OF STATE HIGHWAY NO. 47. FOUND AND HELD FOR CONTROL THOSE CORNERS AS REESTABLISHED OR ESTABLISHED IN THE SW 1/4 OF SECTION 19 BY LONGVIEW FIBRE COMPANY [SURVEY PLAT NO. 3250]. ALSO BLAZED THE WEST LINE OF THE SW 1/4 OF SECTION 19.

L-1668