

SURVEY FOR
ART JOHNSTON MARCH 4, 1985
IN THE NW 1/4 OF SECTION 13, T4 N, R5 W,
W. M. COLUMBIA COUNTY, OREGON.

FOR B.T. RECORD (ORIGINAL), SET 5/8 X 30" I.R. FOR SECTION CORNER 11-12-13-14, N 45° W 20 LKNS (13.2 FT.); SEVERAL SMALL HEMLOCK STUMPS (12 TO 24") INDICATING A GROVE OF HEMLOCK, ALL CUT LOW AND ROTTED AWAY, FOUND A 5"X5"X36" RED CEDAR POST, (HAND HEWN) ON NORTH SIDE OF 80" STUMP, SOME SCR-

FOR COLUMBIA COUNTY B.T. RECORD, MARCH 23, 1898 RESTORATION SECTION CORNER, 11-12-13-14, SET SMALL POST, FOUND A 48" CEDAR STUMP N 40° E 110 LKS (72.6 FT.); 50" FIR STUMP S 70° 15' W 63 LKS (41.6 FT.), STUMPS CUT LOW AND FACE ROTTED NO SCRIBS VISIBLE, POINT IN OLD SKID ROAD.

SEE ENLARGED VIEW OF THIS AREA BELOW, RIGHT.

FOUND 1" IP & AXLE, AS PER B.T. RECORD JULY 21, 1982.

NARRATIVE:

INTENT; TO LOOK FOR & CONSIDER EVIDENCE FOR ORIGINAL CORNER FOR THE N.W. CORNER OF SECTION 13, T4 N, R5 W W. M. COLUMBIA, COUNTY, OREGON.

REFERENCE DATA:

ALL SURVEYS OF RECORD NEAR OR ADJACENT.
B.T. BOOK RECORDS 3-23-1898
10-22-1946
7-21-1982

ORIGINAL FIELD NOTES & PLAT
2-24-1877

FOR ORIGINAL LOCATION I FOUND AN 80" FIR STUMP IN A GROVE OF SMALL HEMLOCK STUMPS AS PER NOTES, ALSO FOUND A 5"X5"X36" HANDHEWN CEDAR POST IN DERRIS ALONG THE NORTH SIDE OF THE NORTH SIDE OF 80" STUMP, I SET A 5/8 X 30" IR N 45° W 13.2 FT AS PER NOTES.

FOR RESTORATION OF SAID COR., I FIND A 50" FIR STUMP & A 48" CEDAR STUMP AT PROPER DIS & BEAR. SEE ENLARGED VIEW AT RT.

I RAN RANDOM LINE TO THE NORTH & WEST TO TIE IN THE IP SAID TO BE THE S. CENTER 1/16 COR., IN SEC 12 AND THE COR. AT THE SW COR OF SECTION 11, AS SHOWN ABOVE.


I RAN RANDOM LINE EAST TO 1/4 COR 12-13 SHOWN IN SUR. NO. 3329 & HELD THE NORTH LINE OF 3329 FOR BEARING DATUM, ALSO RAN SOUTH & TIED TO IR SET FOR THE N. 1/16 13-14 IN SUR 332,

CONT. RT.

NARRATIVE CONT.

I SET A 5/8 X 30" IR ON SEC LINE FOR PROPERTY CORNER 1026' EAST OF SECTION COR (ORIG) TO ESTABLISH NORTH LINE OF SECTION 13.


I SET A 5/8" IR HALF WAY BETWEEN ORIG SEC COR & 1/4 COR 13-14 BASE ON CALC OF SURVEY 3329 AS SHOWN AT LEFT.

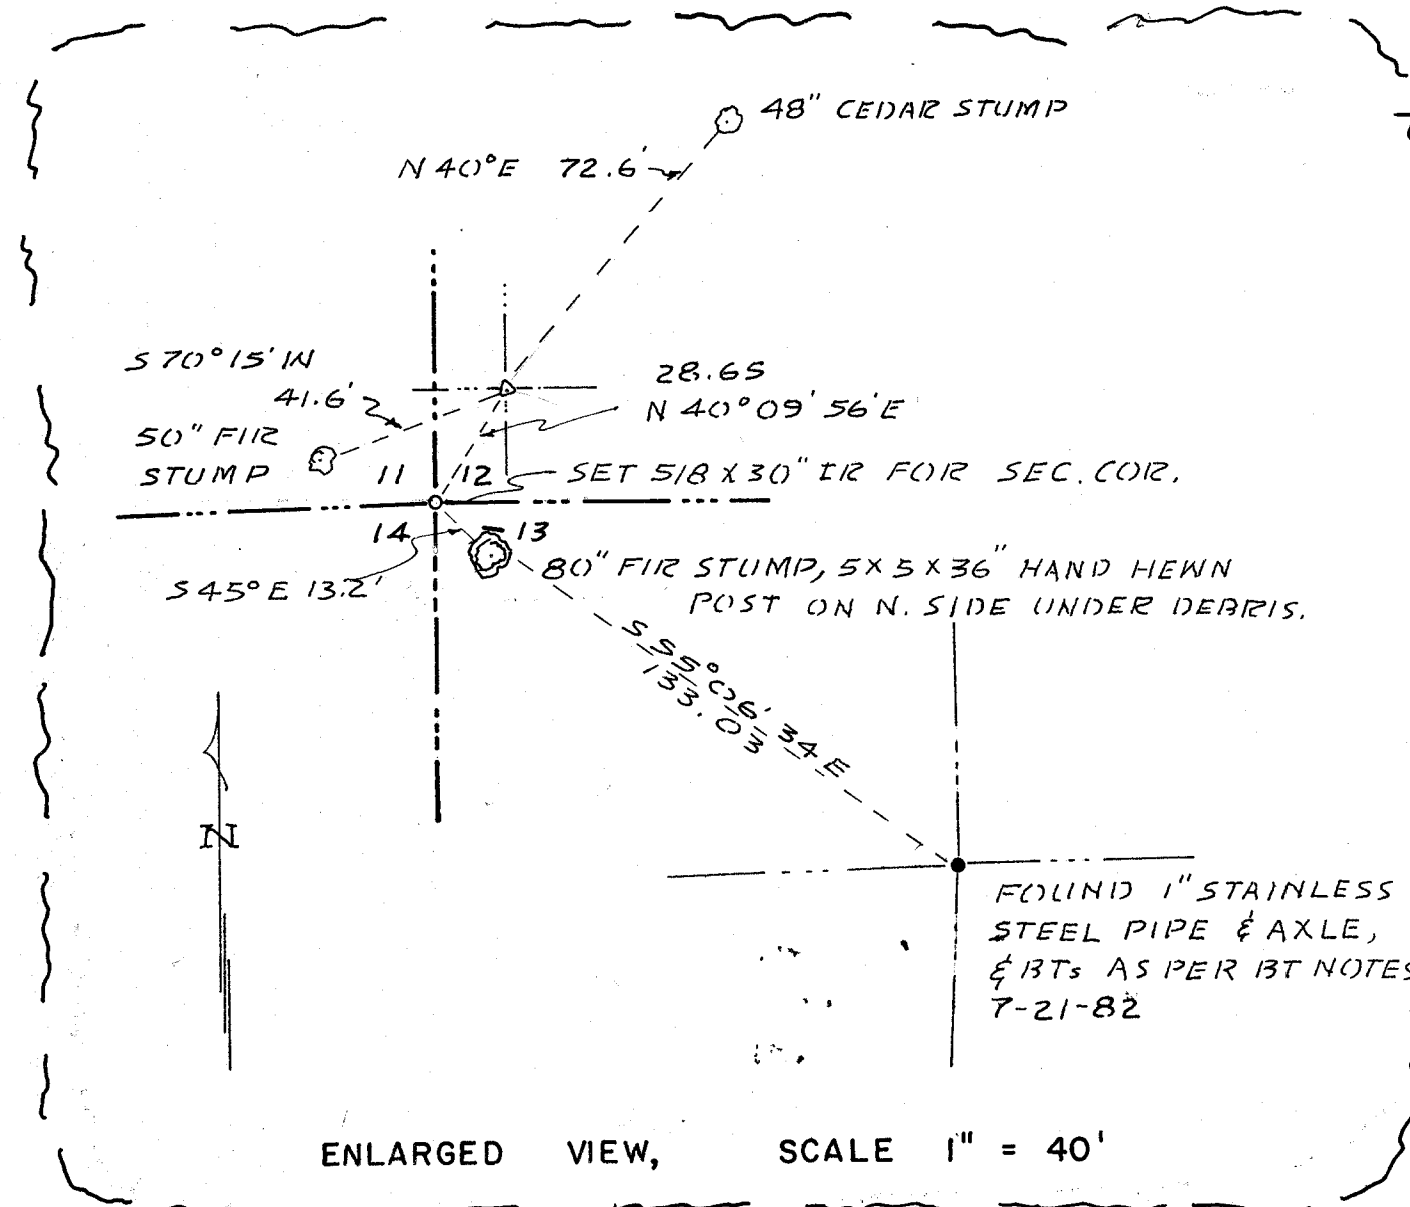

SCALE 1" = 200'
• CORS, FD AS NOTED
○ 5/8 X 30" IRs SET,
YELLOW PLAS. CAP NO. 704.

SURVEY & MAP BY
C. PACE & ASSOCIATES PHONE 357-9697
738 N ADAIR NO. 15
CORNELIUS, OREGON, 97113.

COUNTY SURVEYOR
RECEIVED 3-12-85
FILED 3-12-85



3465