


RECORD OF SURVEY for JENNIFER AND DONALD SODERBACK LOTS 7 AND 8, BLOCK 5, OF COREY ADDITION TO VERNONIA SEC 5, T4N, R4W, W.M. COLUMBIA COUNTY, OREGON JUNE 26, 1992

CN 1/16
2" IP WITH BRASS
CAP

S89°56'00"E

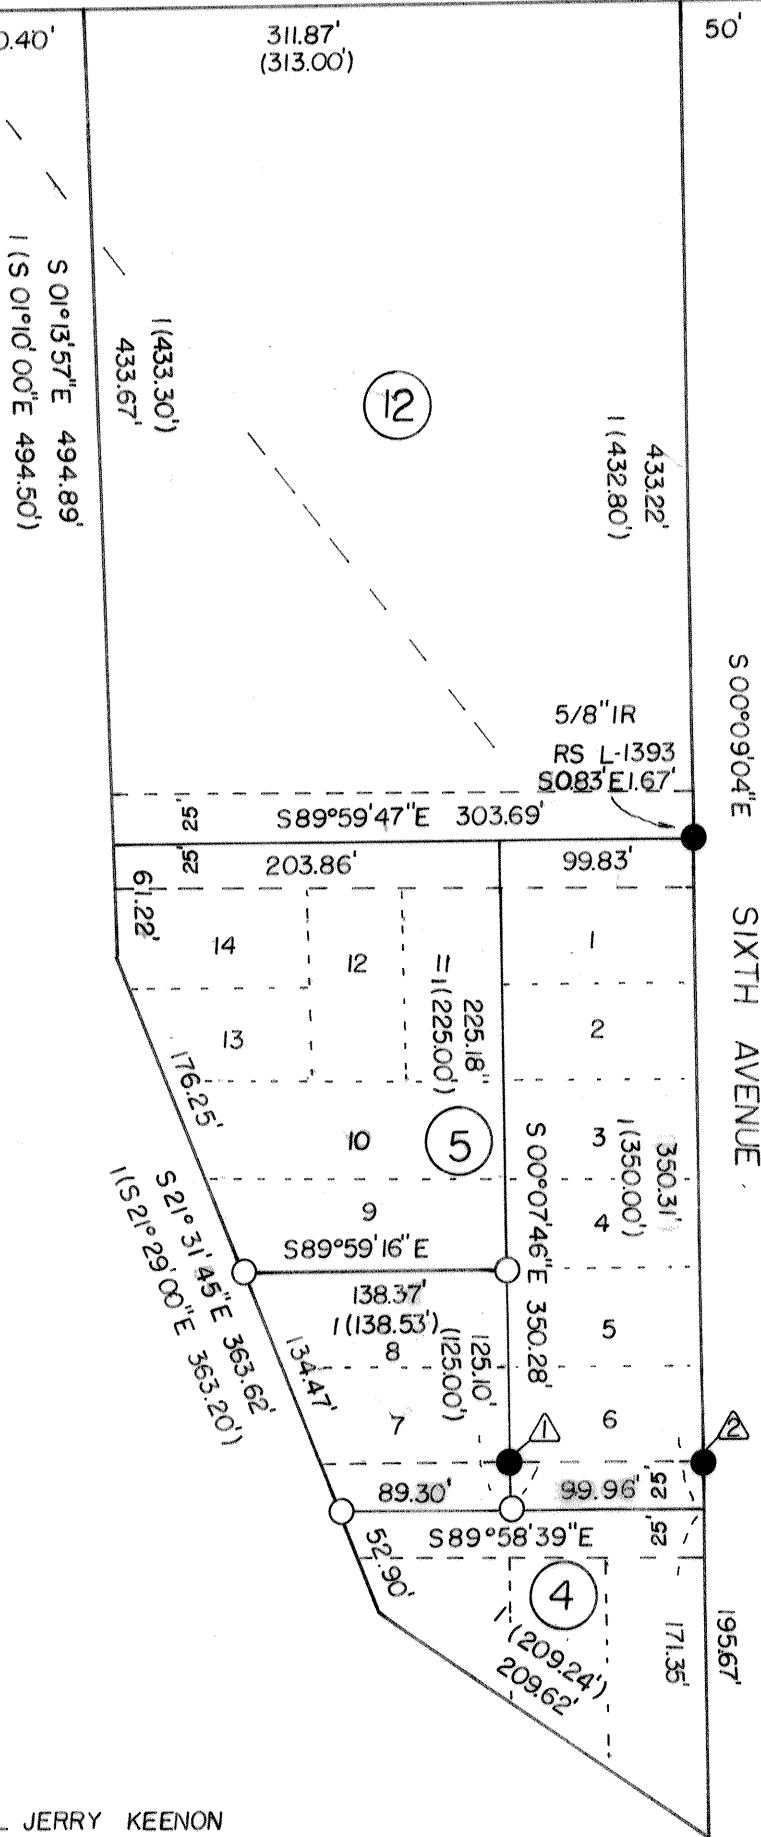

NARRATIVE: THE PURPOSE OF THIS SURVEY WAS TO MONUMENT LOTS 7 AND 8, BLOCK 5, AND THAT PORTION OF NEHALEM STREET AS VACATED THAT REVERTS TO LOT 7, IN COREY ADDITION TO VERNONIA.


PROCEDURE—

1. I HELD THE CN 1/16 AND THE IP IN THE BOILER TUBE AT THE SE CORNER OF BLOCK 2 FOR CONTROL. I DID A COMPASS RULE ADJUSTMENT FROM THEM TO DETERMINE THE WEST LINE OF COREY ADDITION TO VERNONIA.
2. I COMPUTED A COMPASS RULE ADJUSTMENT TO DETERMINE THE WEST LINE OF COREY ADDITION.
3. I HELD THE BEARING FROM THE CN 1/16 AND A PROPORTIONED DISTANCE PER RS B-63 TO CALCULATE THE NE CORNER OF BLOCK 12.
4. THE BASIS OF BEARINGS IS FROM A TIE BETWEEN THE CN 1/16 AND THE SE CORNER OF BLOCK 2, FROM RS B-63

LEGEND

- - MONUMENT FOUND AS NOTED
- - SET A 5/8"X 30" IR WITH A YELLOW PLASTIC CAP MARKED "KEENON LS 1080"
- IP - IRON PIPE
- IR - IRON ROD
- () - RECORD DATA 1. COREY ADDITION TO VERNONIA
2. RS B-63
- RS - RECORD SURVEY
- △ - MONUMENTATION DATA
1) 5/8" IR PER RS L-1393, E 0.59' S 0.63'
2) 5/8" IR PER RS L-1393, E 0.48' S 0.67'

L JERRY KEENON
1311 ALDER ST
VERNONIA, OREGON 97064
PH # 429-6115



COUNTY SURVEYOR

RECEIVED 7-14-92
FILED 7-28-92

IP IN BOILER
TUBE SE CORNER
BLOCK 2

B-154