
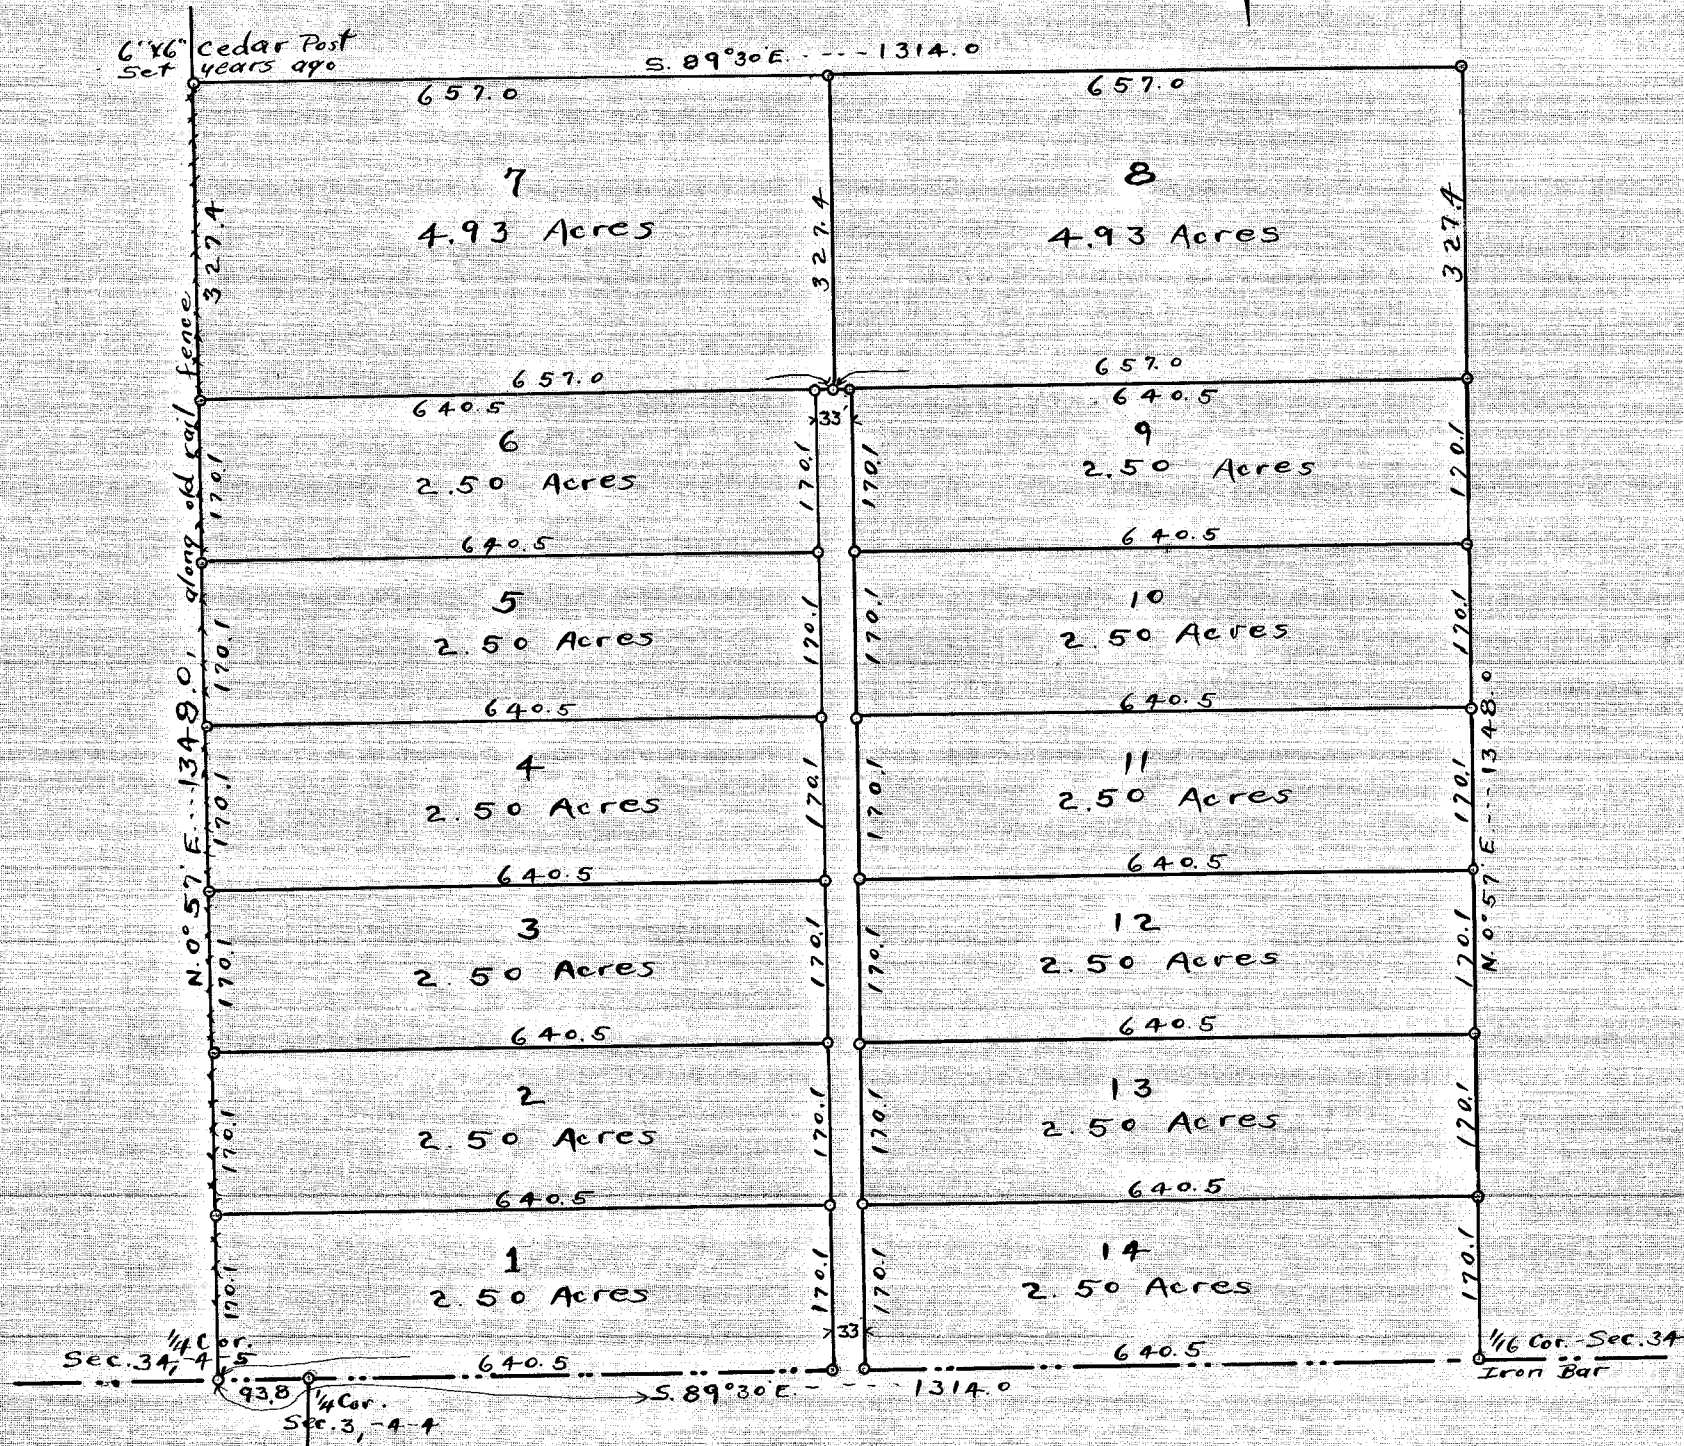


MAP SHOWING
SUBDIVISION OF THE S.W. $\frac{1}{4}$ OF THE SE. $\frac{1}{4}$
OF
SEC. 34, T. 5 N. R. 4 W.
COLUMBIA CO., ORE.
FEB. 1924 SCALE, 1" = 200'
L. J. Van Orshoven
Field notes in Bk. 25, pages 55, 56.

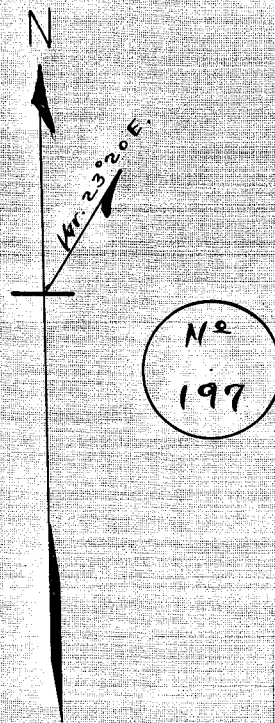

FEB. 26, 1924.

DESCRIPTION OF PARCELS IN THE S.W. $\frac{1}{4}$ of the S.E. $\frac{1}{4}$
OF SECTION 34, T. 5 N. R. 4 W.
FOR JOHN G. LINDBERG, VERNONIA, ORE.

TRACT NO. 1.

Beginning at the $\frac{1}{4}$ section corner on the ^{South} side of section 34, T. 5 N. R. 4 W. of W.M., Columbia County, Oregon; thence along section line, S. 89° 30' E. -- 640.5 feet to the westerly edge of a 33.0 foot roadway; thence along edge of said roadway, N. 0° 57' E. -- 170.1 feet; thence N. 89° 30' W. -- 640.5 feet; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 2.

Beginning at a point that is N. 0° 57' E. -- 170.1 feet from the $\frac{1}{4}$ section corner on the ^{South} side of section 34, T. 5 N. R. 4 W. of W.M., Columbia County, Oregon; thence S. 89° 30' E. -- 640.5 feet to the westerly edge of a 33.0 foot roadway; thence N. 0° 57' E. -- 170.1 feet; thence N. 89° 30' W. -- 640.5 feet; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 3.

Beginning at a point that is N. 0° 57' E. -- 340.2 feet from the $\frac{1}{4}$ section corner on the ^{South} side of section 34, T. 5 N. R. 4 W. of W.M., Columbia County, Oregon; thence S. 89° 30' E. -- 640.5 feet to the westerly edge of a 33.0 foot roadway; thence N. 0° 57' E. -- 170.1 feet; thence N. 89° 30' W. -- 640.5 feet; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 4.

Beginning at a point that is N. 0° 57' E. -- 510.3 feet from the $\frac{1}{4}$ section corner on the ^{South} side of section 34, T. 5 N. R. 4 W. of W.M., Columbia County, Oregon; thence S. 89° 30' E. -- 640.5 feet to the westerly edge of a 33.0 foot roadway; thence N. 0° 57' E. -- 170.1 feet; thence N. 89° 30' W. -- 640.5 feet; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 5.

Beginning at a point that is N. 0° 57' E. -- 680.4 feet from the $\frac{1}{4}$ section corner on the ^{South} side of section 34, T. 5 N. R. 4 W. of W.M., Columbia County, Oregon; thence S. 89° 30' E. -- 640.5 feet to the westerly edge of a 33.0 foot roadway; thence N. 0° 57' E. -- 170.1 feet; thence N. 89° 30' W. -- 640.5 feet; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 6.

Beginning at a point that is N. 0° 57' E. -- 850.5 feet from the $\frac{1}{4}$ section corner on the ^{South} side of section 34, T. 5 N. R. 4 W. of W.M., Columbia County, Oregon; thence S. 89° 30' E. -- 640.5 feet; to the westerly edge of a 33.0 foot roadway; thence N. 0° 57' E. -- 170.1 feet; thence N. 89° 30' W. -- 640.5 feet; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 7.

Beginning at a point that is N. 0° 57' E. -- 1020.6 feet from the $\frac{1}{4}$ section corner on the south side of section 34, T. 5 N. R. 4 W. of W.M., Columbia County, Oregon; thence S. 89° 30' E. -- 657.0 feet; thence N. 0° 57' E. -- 327.4 feet; thence N. 89° 30' W. -- 657.0 feet; thence S. 0° 57' W. -- 327.4 feet to the place of beginning and containing 4.93 acres.

FEB. 20, 1924.

DESCRIPTION OF PARCELS IN THE S.W. $\frac{1}{4}$ OF THE S.E. $\frac{1}{4}$
OF SECTION # 34, T. 5 N. R. 4 W.
FOR JOHN G. LINDERBERG, VERNONIA, ORE.

TRACT NO. 8.

Beginning at a point that is N. 0° 57' E. -- 1020.6 feet and S. 89° 30' E. -- 657.0 feet from the $\frac{1}{4}$ section corner on the south side of section 34, T. 5 N. R. 4 W. of W.M.; Columbia County, Oregon; thence S. 89° 30' E. -- 657.0 feet; thence N. 0° 57' E. -- 327.4 feet; thence S. 89° 30' W. -- 657.0 feet; thence S. 0° 57' W. -- 327.4 feet to the place of beginning and containing 4.93 acres.

TRACT NO. 9.

Beginning at a point on the easterly edge of a 33.0 foot roadway that is N. 0° 57' E. -- 850.5 feet and S. 89° 30' E. -- 673.5 feet from the $\frac{1}{4}$ section corner on the south side of section 34, T. 5 N. R. 4 W. of W.M.; Columbia County, Ore.; thence S. 89° 30' E. -- 640.5 feet; thence N. 0° 57' E. -- 170.1 feet; thence S. 89° 30' W. -- 640.5 feet; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 10.

Beginning at a point on the easterly edge of a 33.0 foot roadway that is N. 0° 57' E. -- 680.4 feet and S. 89° 30' E. -- 673.5 feet from the $\frac{1}{4}$ section corner on the south side of section 34, T. 5 N. R. 4 W. of W.M.; Columbia County, Ore.; thence S. 89° 30' E. -- 640.5 feet; thence N. 0° 57' E. -- 170.1 feet; thence N. 89° 30' W. -- 640.5 feet; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 11.

Beginning at a point on the easterly edge of a 33.0 foot roadway that is N. 0° 57' E. -- 510.3 feet and S. 89° 30' E. -- 673.5 feet from the $\frac{1}{4}$ section corner on the south side of section 34, T. 5 N. R. 4 W. of W.M.; Columbia County, Ore.; thence S. 89° 30' E. -- 640.5 feet; thence N. 0° 57' E. -- 170.1 ft.; thence N. 89° 30' W. -- 640.5 ft.; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 12.

Beginning at a point on the easterly edge of a 33.0 foot roadway that is N. 0° 57' E. -- 340.2 feet and S. 89° 30' E. -- 673.5 feet from the $\frac{1}{4}$ section corner on the south side of section 34, T. 5 N. R. 4 W. of W.M.; Columbia County, Ore.; thence S. 89° 30' E. -- 640.5 feet; thence N. 0° 57' E. -- 170.1 ft.; thence N. 89° 30' W. -- 640.5 ft.; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.

TRACT NO. 13.

Beginning at a point on the easterly edge of a 33.0 foot roadway that is N. 0° 57' E. -- 170.1 ft.; and S. 89° 30' E. -- 673.5 ft. from the $\frac{1}{4}$ section corner on the south side of section 34, T. 5 N. R. 4 W. of W.M.; Columbia County, Ore.; thence S. 89° 30' E. -- 640.5 ft.; thence N. 0° 57' E. -- 170.1 ft.; thence N. 89° 30' W. -- 640.5 ft.; thence S. 0° 57' W. -- 170.1 ft. to the place of beginning and containing 2.50 acres.

TRACT NO. 14.

Beginning at a point on the easterly edge of a 33.0 foot roadway that is S. 89° 30' E. -- 673.5 feet from the $\frac{1}{4}$ section corner on the south side of section 34, T. 5 N. R. 4 W. of W.M.; Columbia County, Oregon; thence S. 89° 30' E. -- 640.5 feet; thence N. 0° 57' E. -- 170.1 ft.; thence N. 89° 30' W. -- 640.5 feet; thence S. 0° 57' W. -- 170.1 feet to the place of beginning and containing 2.50 acres.
