

RECORD OF SURVEY
for ROB RICHARDS
LOTS 1-3, BLOCK 9 COREY ADD.
TO VERNONIA, IN THE
NE 1/4 SECTION 5, T.4N, R.4W, W.M.
COLUMBIA COUNTY, OREGON
SCALE 1"=100' MAY 15, 1991

NARRATIVE: THIS SURVEY WAS DONE AT THE REQUEST OF ROB RICHARDS TO MONUMENT THE EXTERIOR OF LOTS 1-3, BLOCK 9, COREY ADDITION TO VERNONIA. THE BASIS OF BEARINGS IS THE NORTH LINE OF THE COREY ADDITION PLAT AS MONUMENTED IN CS#3201 I HELD THE IP IN THE SE CORNER OF BLOCK 2 AS A PERPETUATED ORIGINAL PER CS# L-1192. I ALSO HELD THE 1/8" IR AT THE SW CORNER OF BLOCK 5, CENTRAL ADDITION TO VERNONIA.

- LEGEND
- MONUMENT FOUND AS NOTED
 - SET 5/8"X30" IR WITH A YELLOW PLASTIC CAP MARKED "KEENON PLS 1080"
 - () RECORD DATA 1-COREY ADDITION PLAT 2-CS # 3201


L JERRY KEENON
1311 ALDER ST
VERNONIA OREGON 97064
PH# 429-6115

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Leslie G. Keenon

OREGON
JULY 30, 1976
LESLIE G. KEENON
1080

DRAWN BY: DON WALLACE

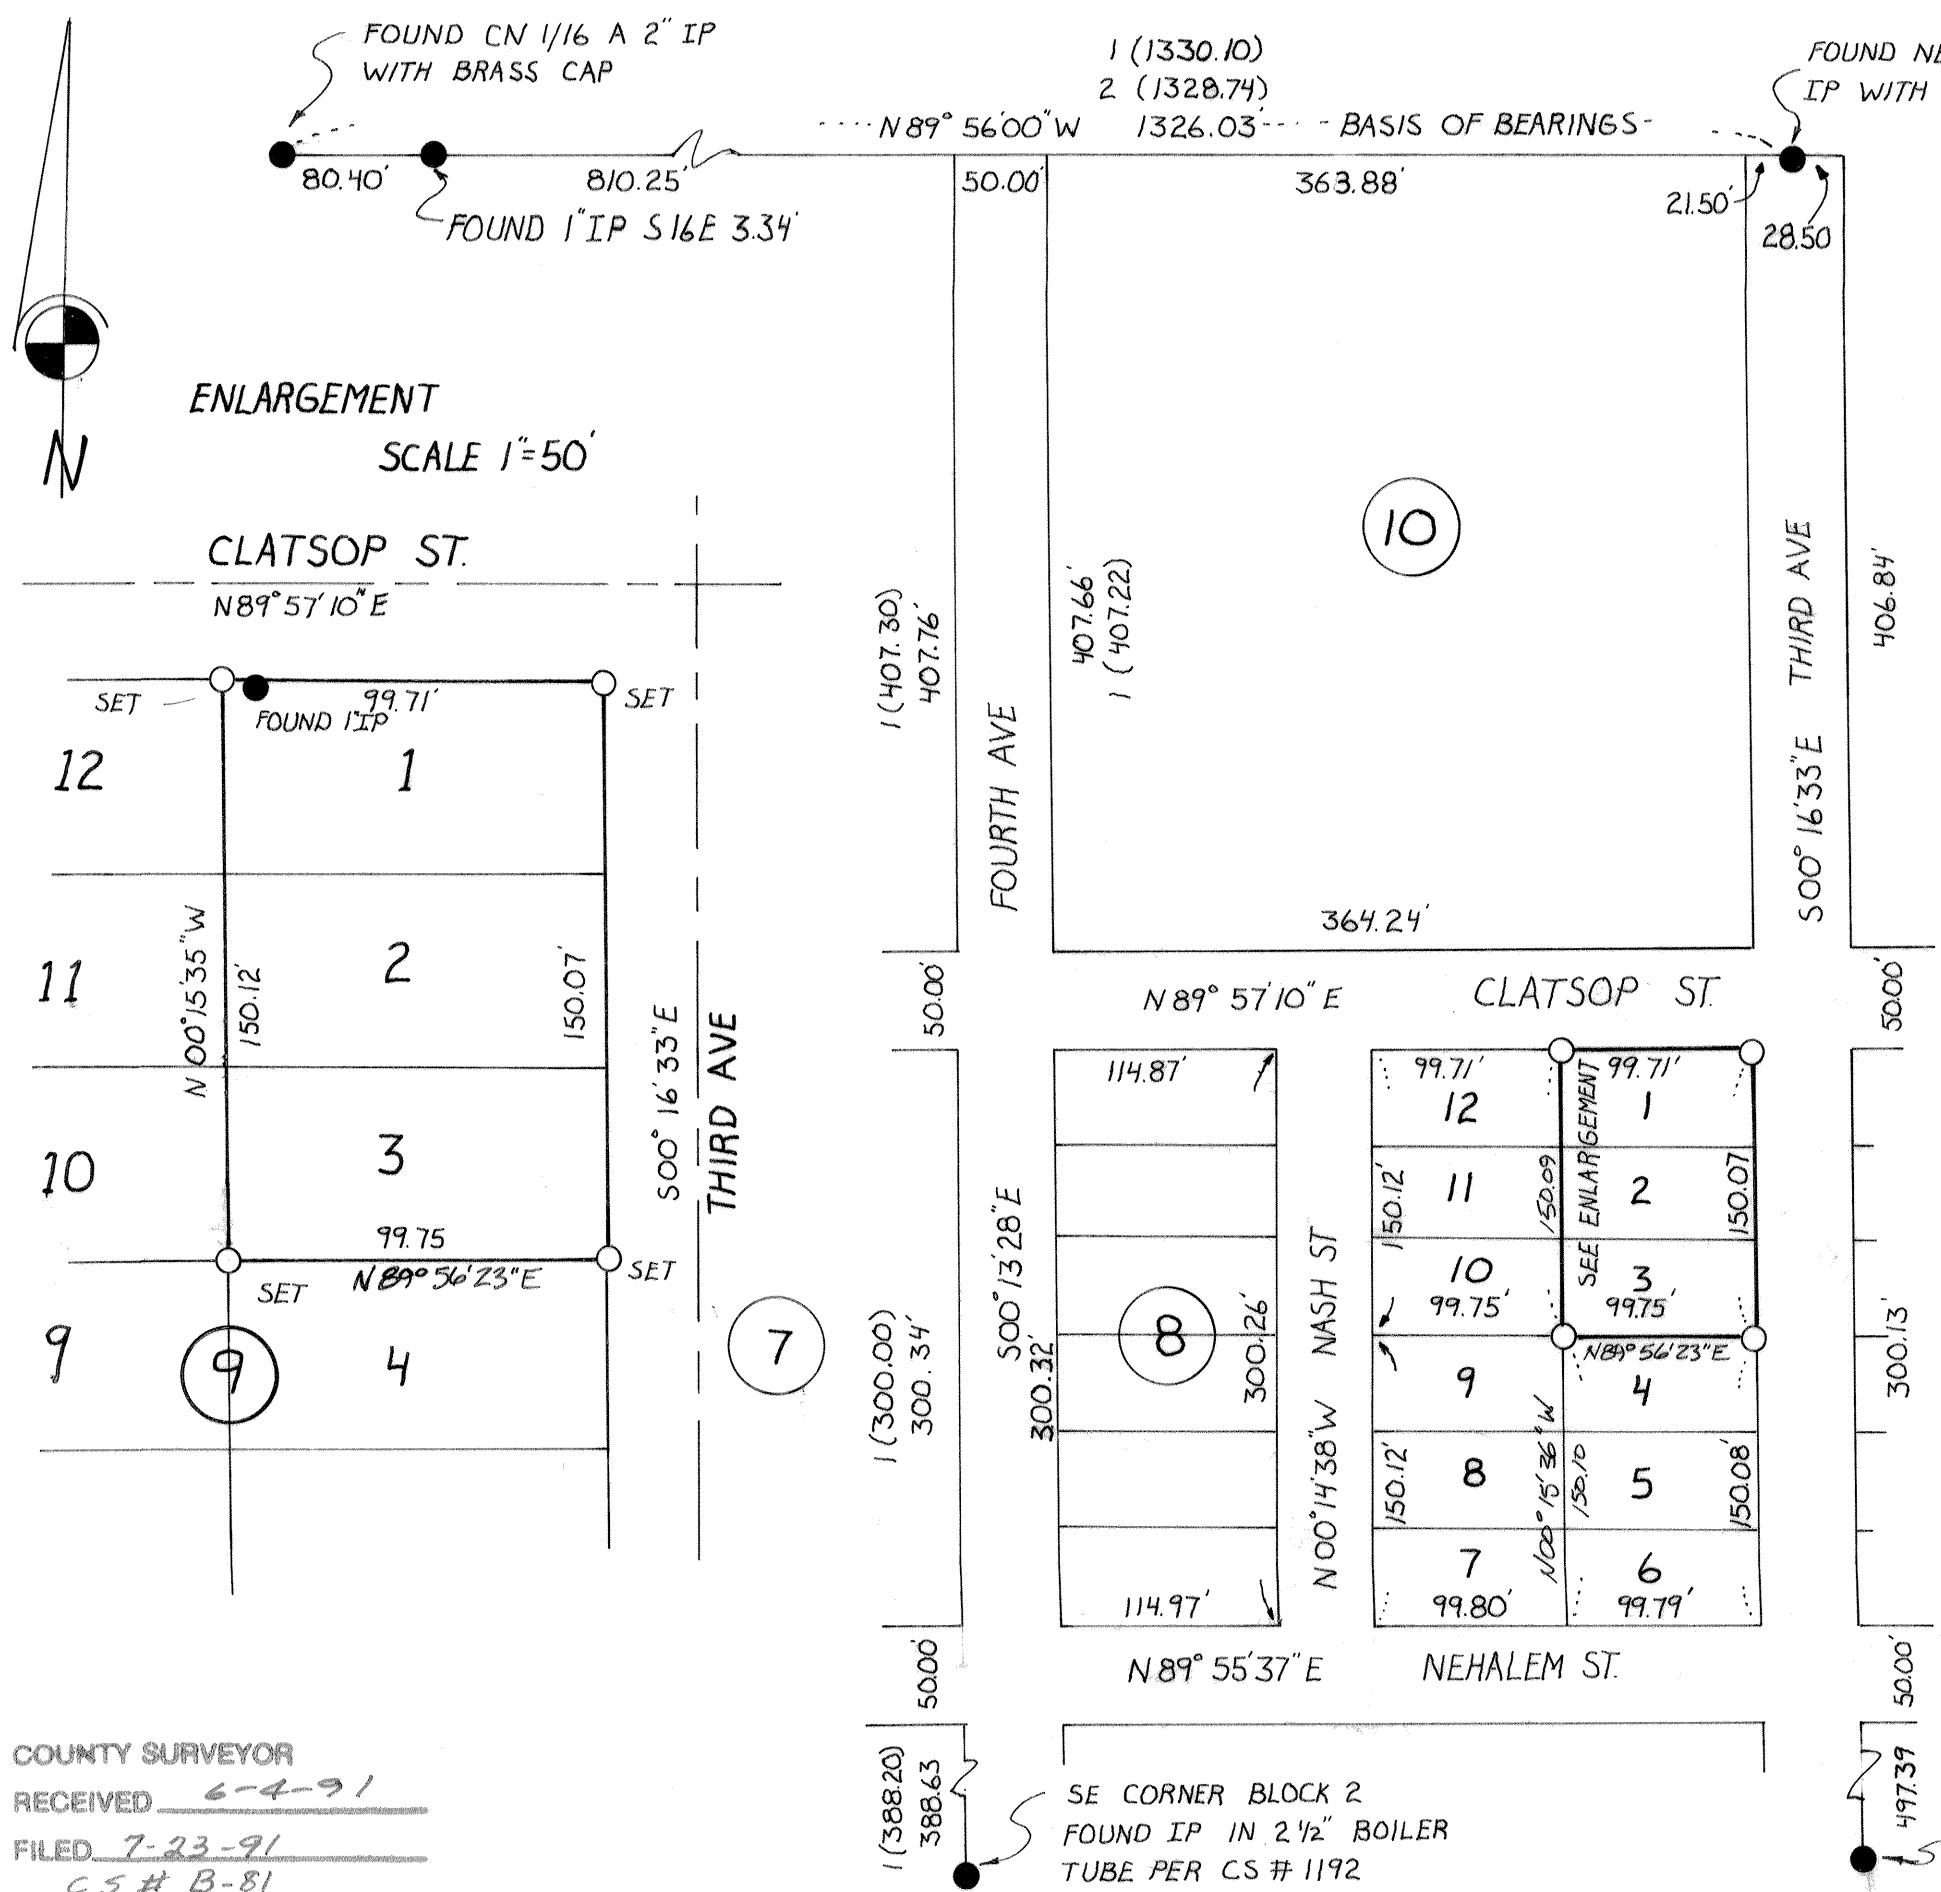

COUNTY SURVEYOR
RECEIVED 6-4-91
FILED 7-23-91
CS # B-81

SE CORNER BLOCK 2
FOUND IP IN 2 1/2" BOILER
TUBE PER CS # 1192

SW CORNER BLOCK 5
CENTRAL ADDITION
FOUND 1/8" ROD