


VERNONIA MEMORIAL CEMETERY

SECTIONS 'A' THRU 'K'

A REPLAT OF ORIGINAL SECTIONS 'A' THRU 'H'
AND ADDITIONAL PLAT OF NEW SECTIONS 'I', 'J' & 'K' IN THE N.W. AND
S.W. 1/4'S OF THE N.E. 1/4 OF SECTION 5, T.4N., R.4W., W.M.
COLUMBIA COUNTY, CITY OF VERNONIA, STATE OF OREGON
SCALE: 1"=30'



ROBERT E. MEYER
ENGINEERS INC.
14250 S. W. ALLEN BOULEVARD
BEAVERTON, OREGON 97005

APPROVALS

APPROVED THIS 2 DAY OF _____, 1978,
CHAIRMAN, CITY OF VERNONIA PLANNING COMMISSION

BY _____

APPROVED THIS 22 DAY OF March, 1978,
MAYOR, CITY OF VERNONIA

BY Sherman S. Fisher

APPROVED THIS 22 DAY OF March, 1978
RECORDER, CITY OF VERNONIA

BY Phyllis S. Woods

APPROVED THIS _____ DAY OF _____, 1978
DIRECTOR OF ASSESSMENT AND TAXATION
(COUNTY ASSESSOR), COLUMBIA COUNTY

BY _____

APPROVED THIS _____ DAY OF _____, 1978
BOARD OF COUNTY COMMISSIONERS, COLUMBIA COUNTY

BY _____ COMMISSIONER

BY _____ COMMISSIONER

BY _____ COMMISSIONER

ATTEST: DIRECTOR OF RECORDS AND ELECTIONS
(COUNTY CLERK), COLUMBIA COUNTY

BY _____

APPROVED THIS _____ DAY OF _____, 1978
COLUMBIA COUNTY SURVEYOR

BY _____

APPROVED THIS _____ DAY OF _____, 1978
HEALTH DEPARTMENT

BY _____


DEDICATION

KNOW ALL MEN BY THESE PRESENTS:

THAT THE CITY OF VERNONIA, AN OREGON MUNICIPAL CORPORATION ORGANIZED UNDER AND BY VIRTUE OF THE LAWS OF THE STATE OF OREGON AND COLUMBIA COUNTY, IS THE TITLE OWNER OF THE LANDS IN THE N.W. 1/4 OF THE N.W. 1/4 OF SECTION 5, T. 4 N., R. 4 W., W.M., COLUMBIA COUNTY, OREGON SHOWN ON THE ANNEXED PLAT AND MORE PARTICULARLY DESCRIBED IN THE SURVEYOR'S CERTIFICATE HEREUNTO ATTACHED AND HAVE CAUSED THE SAME TO BE SURVEYED AND PLATTED INTO GRAVE-SITES, LOTS AND STREETS AS SHOWN AND TO BE DEDICATED "VERNONIA MEMORIAL CEMETERY" AND DOES HEREBY DEDICATE SAID LANDS EXCLUSIVELY FOR CEMETERY PURPOSES.

Sherman S. Fisher
SHERMAN S. FISHER, MAYOR
CITY OF VERNONIA

Phyllis S. Woods
PHYLLIS S. WOODS, RECORDER
CITY OF VERNONIA

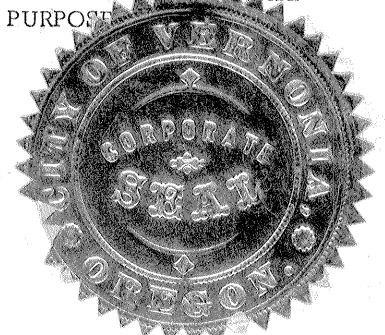

ACKNOWLEDGEMENT


STATE OF OREGON)
COUNTY OF COLUMBIA) S.S.

THIS IS TO CERTIFY THAT ON THIS 22 DAY OF March, 1978, BEFORE ME, A NOTARY PUBLIC IN AND FOR SAID COUNTY AND STATE, PERSONALLY APPEARED SHERMAN S. FISHER AND PHYLLIS S. WOODS WHO ARE KNOWN TO ME TO BE THE IDENTICAL PERSONS NAMED IN AND WHO EXECUTED THE FOREGOING INSTRUMENT AND WHO FIRST BEING DULY SWORN DID SAY THAT HE, SHERMAN S. FISHER, IS MAYOR OF THE CITY OF VERNONIA, AND SHE, PHYLLIS S. WOODS, IS RECORDER FOR THE CITY OF VERNONIA, AND THAT THE SEAL AFFIXED TO THE FOREGOING INSTRUMENT IS THE OFFICIAL SEAL OF SAID MUNICIPAL CORPORATION (CITY OF VERNONIA) AND THAT SAID INSTRUMENT WAS SIGNED AND SEALED ON BEHALF OF SAID CORPORATION BY AUTHORITY OF ITS BOARD OF DIRECTORS (VERNONIA CITY COUNCIL) PURSUANT TO ORDINANCE NO. 237 (MAY 1, 1939) AND SAID SHERMAN S. FISHER, AND PHYLLIS S. WOODS ACKNOWLEDGED TO ME THAT THEY EXECUTED THE SAME FREELY AND VOLUNTARILY.

WITNESS MY HAND AND OFFICIAL SEAL
THIS DAY AND YEAR LAST ABOVE WRITTEN

Vesta A. Heng
NOTARY PUBLIC FOR THE STATE OF OREGON

MY COMMISSION EXPIRES 7-23-80

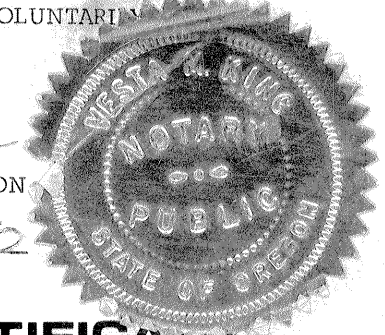

SURVEYOR'S CERTIFICATE

STATE OF OREGON)
COUNTY OF COLUMBIA) S.S.

I, FRANK H. SELLERS, A REGISTERED PROFESSIONAL LAND SURVEYOR IN THE STATE OF OREGON, HEREBY CERTIFY THAT DURING THE MONTH OF JANUARY, 1978, I CORRECTLY SURVEYED AND MARKED WITH PROPER MONUMENTS THE LANDS REPRESENTED UPON THE ANNEXED MAP AS "VERNONIA MEMORIAL CEMETERY" THAT THE INITIAL POINT IS A 3" GALVANIZED IRON PIPE SET FOR THE EAST SIDE OF BRIDGE ST; SAID PIPE ALSO BEING THE INITIAL POINT USED BY EARLE S. SMITH, REGISTERED PROFESSIONAL ENGINEER, FOR THE ORIGINAL PLAT OF SAID CEMETERY IN 1939.



BEGINNING AT THE INITIAL POINT WHICH BEARS S 89° 56' E, 80.19 FEET BY RECORD FROM THE CENTER NORTH 1/16 CORNER OF SECTION 5, T. 4 N., R. 4 W., W.M., COLUMBIA COUNTY, OREGON; THENCE S 89° 56' E, 65.00 FEET TO A 2-1/2" IRON PIPE; THENCE S 00° 04' W 2.00 FEET TO A 5/8" IRON ROD; THENCE S 89° 56' E 18.00 FEET TO A 5/8" IRON ROD; THENCE S 00° 04' W 128.00 FEET TO A 5/8" IRON ROD; THENCE S 89° 56' E 250.00 FEET TO A 5/8" IRON ROD; THENCE N 00° 04' E 130.00 FEET TO A 5/8" IRON ROD; THENCE S 89° 56' E 157.00 FEET, TO A 2-1/2" IRON PIPE; THENCE N 00° 04' E 450.00 FEET TO A 2-1/2" IRON PIPE; THENCE S 00° 04' W 450.00 FEET TO THE POINT OF BEGINNING.

THE ATTACHED PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE BLOCKS, GRAVE-SITES AND STREETS AS STAKED UPON THE GROUND WITH 5/8" x 30" IRON RODS WITH P.L.S. NO. 1061 PLASTIC CAPS AT ALL POINTS INDICATED AS THUS (●).

SUBSCRIBED AND SWORN TO BEFORE ME THIS 20th DAY OF March, 1978.

Barbara J. Memorich
NOTARY PUBLIC FOR THE STATE OF OREGON

MY COMMISSION EXPIRES 8/22/81

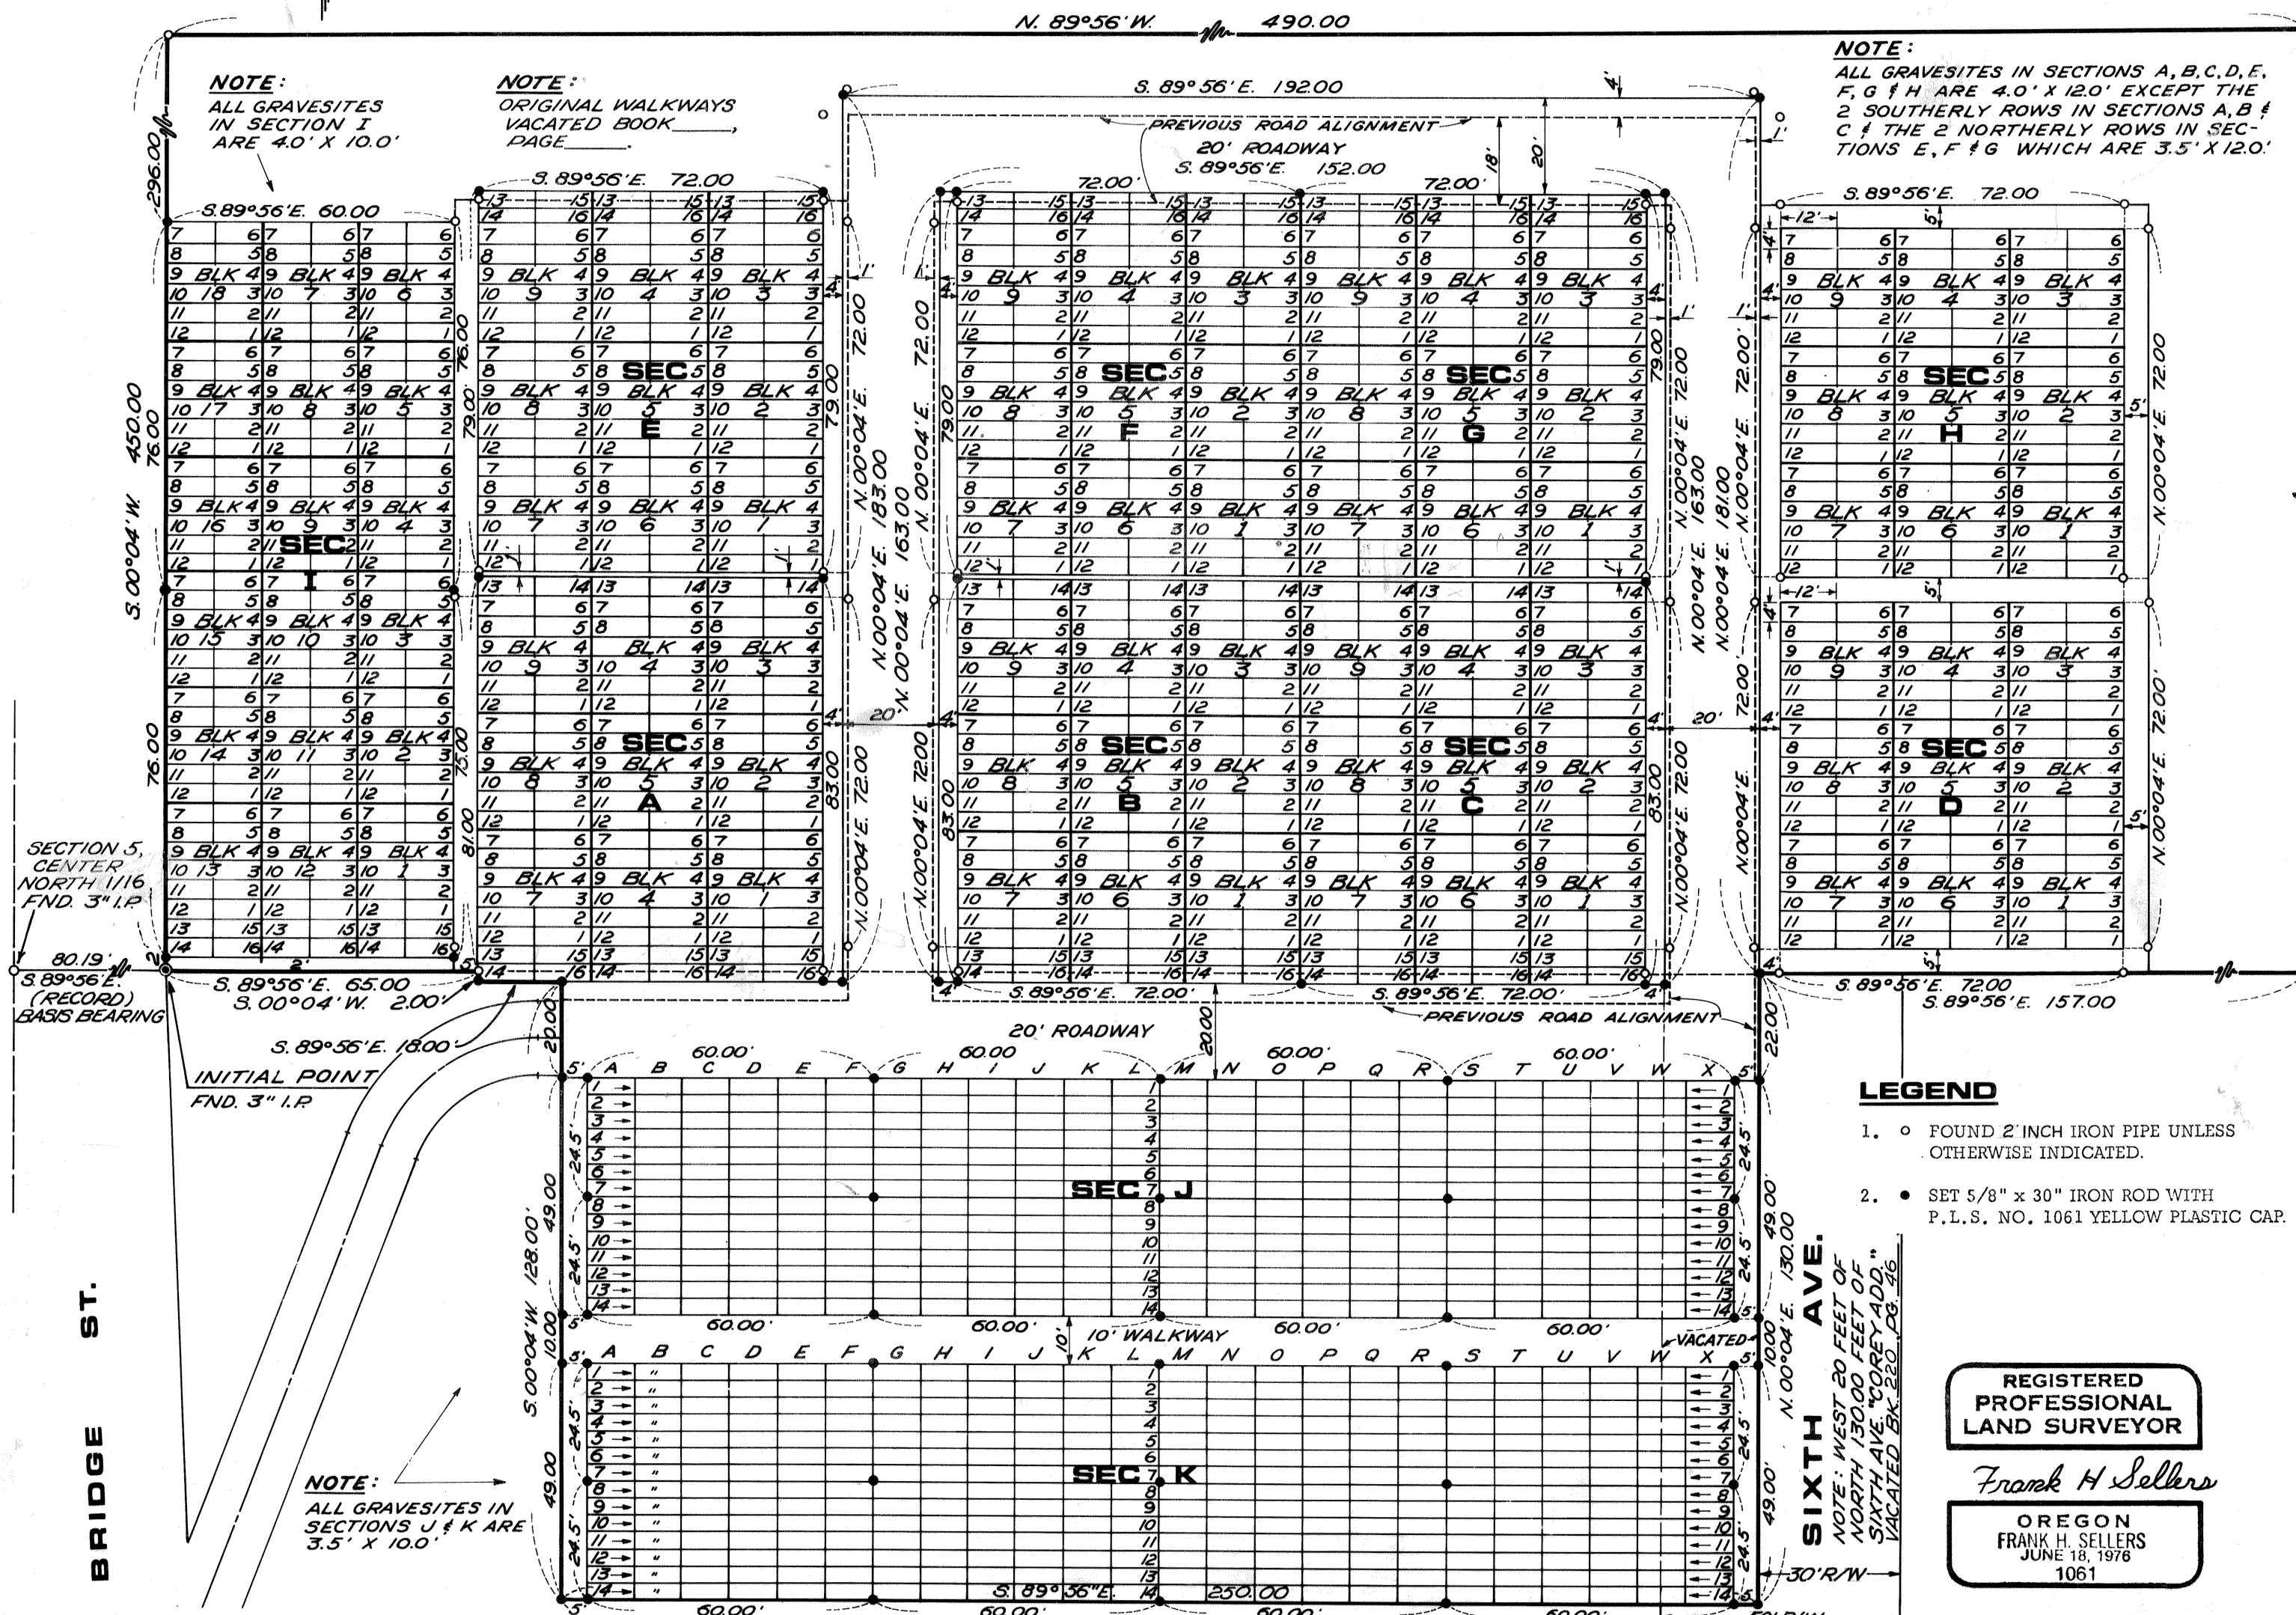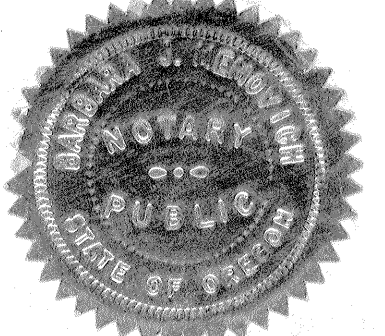

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Frank H. Sellers
OREGON
FRANK H. SELLERS
JUNE 18, 1976
1061