


BOUNDARY SURVEY & SUBDIVISION
SECTION 6 & 7, T4N, R3W, W.M.
COLUMBIA COUNTY, OREGON
For CAVENHAM FOREST INDUSTRIES, INC.
SCALE 1"=400' JAN 16, 1988

NARRATIVE: THIS BOUNDARY SURVEY PROJECT BEING IN SECTIONS 6 & 7 OF T4N, R3W, WAS DONE AT THE REQUEST OF CAVENHAM FOREST INDUSTRIES, INC. THE PROJECT WAS DONE IN TWO PHASES. SECTION 7, WE RECOVERED EXISTING SUBDIVISION WORK BY B.L.M., DATED 1963, AND FLAGGED, TAGGED, PAINTED & BLAZED BOUNDARY AS NOTED. SECTION 6 REQUIRED THE ESTABLISHMENT OF SUBDIVISION CORNERS ON THE SOUTH & WEST SECTION LINES. THE 1970 ESTABLISHED W 1/4 WAS FOUND TO BE SET IN ERROR THEREFOR WE TIED TO THE TOWNSHIP CORNER AS RECONSTRUCTED IN 1983. IT SHOULD BE NOTED THAT THE CLOSING CORNER LIES 27+ FEET NORTH OF THE TWP LINE. THE 1970 SURVEY DID NOT ESTABLISH A 1/16 ON THE SOUTH LINE, AS REQUIRED TO DEFINE THE DEEDED PARCEL. THE 1/2" I.P. WE FOUND 87+ FEET EAST OF THE 1/16 WAS NOTED IN THE SURVEY OF 1970. BEARINGS ON BOTH PARTS OF THIS SURVEY ARE BASED ON THE RECORD PLATTED BEARINGS OF THE BUREAU OF LAND MANAGEMENT PART 1965, A DEPENDANT RESURVEY.

PORTIONS OF
SECTION 7, T4N, R3W.

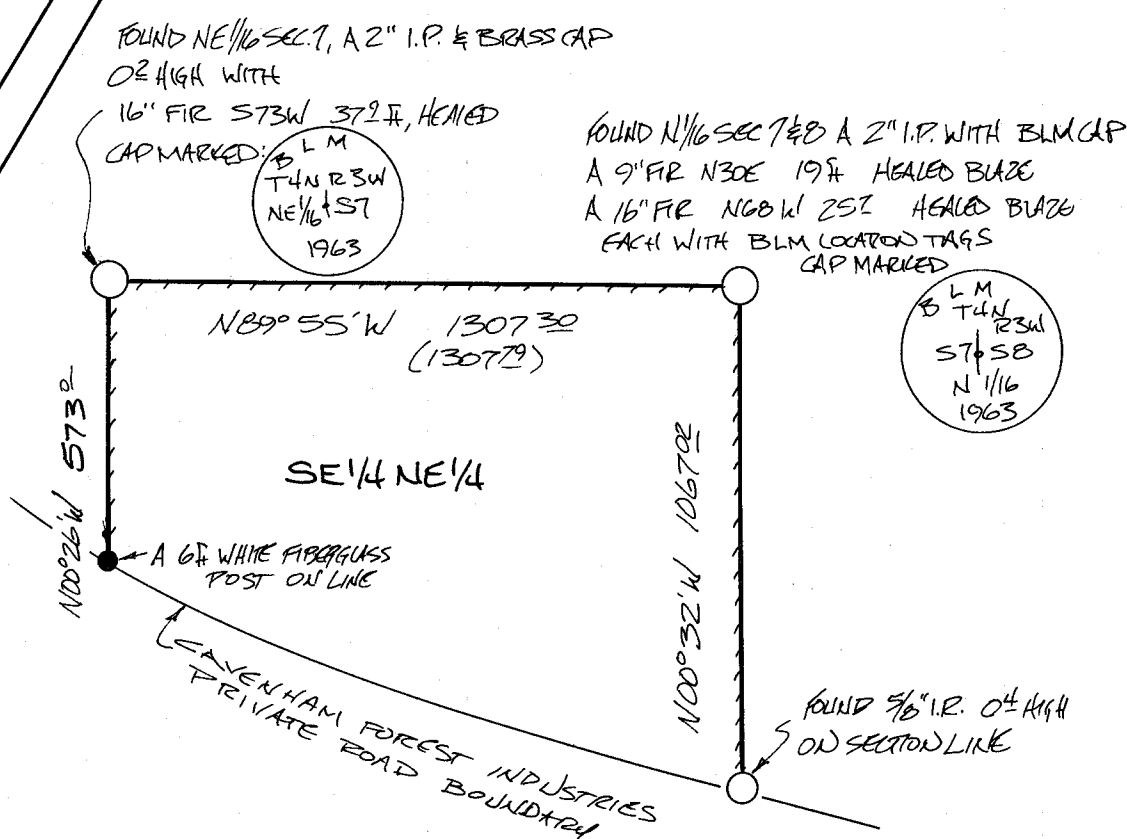


NOTE: ALL MONUMENTS SET ARE REFERENCED TO TREES AS REPORTED, EACH MARKED WITH 4 LARGE BLAZES UP THE FACE, A 6" BOAT SPIKE DRIVEN AT THE BASE OF THE BOTTOM BLAZE. DISTANCES MEASURED TO THE HEAD OF THE SPIKE, AND TO THE CENTER OF THE TREE. A 6" FIBERGLASS POST SET 12" NORTH OF MONUMENT PIPE, AND LOCATION TAGS PLACED ABOVE BLAZES ON EACH TREE. WITH A HEAVY APPLICATION OF TREE MARKING PAINT ON THE BLAZES. FIELD CREW INCLUDED:

H.W. WEIGAND
C. ESCO BELL, E.I.T.
TERRY RUSSELL
SHAWN STEVENS

LESLIE KEENON
1311 E. ALDER ST
VENONA, OREGON 97064
PH 429-6115

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 30, 1978
LESLIE G. KEENON
P.L.S. 1080

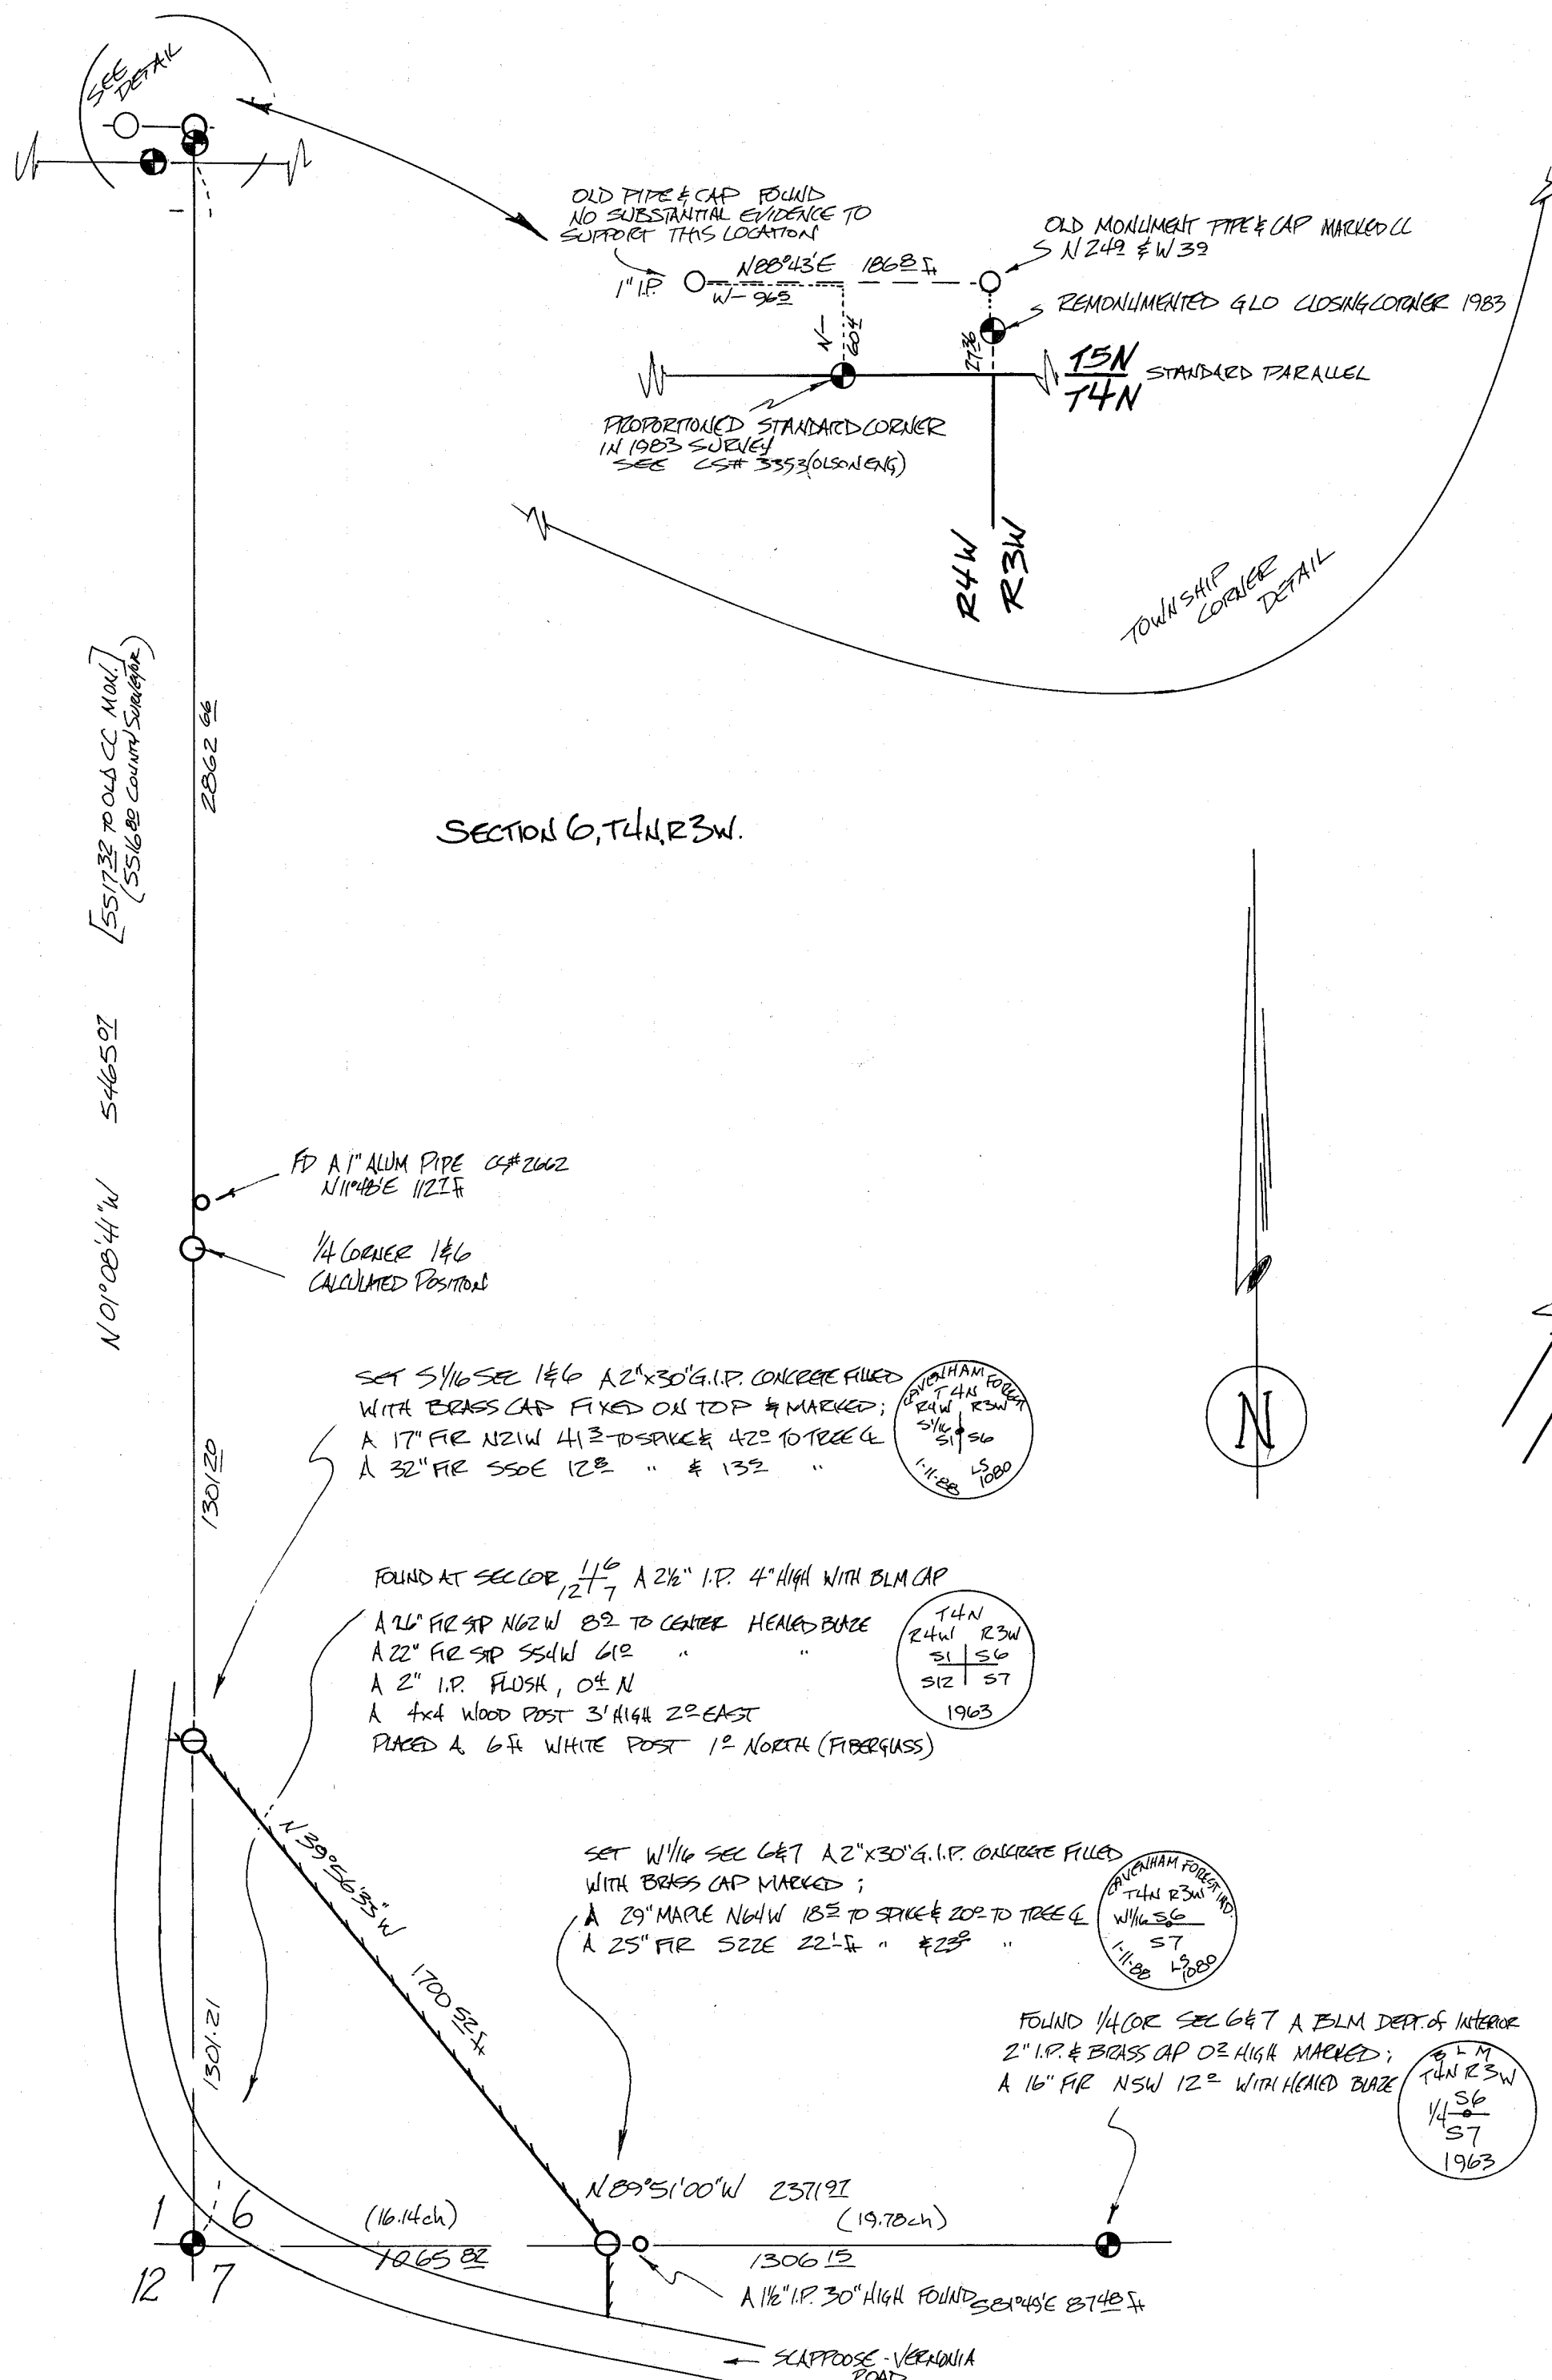

COUNTY SURVEYOR
RECEIVED 2-1-88 TD
FILED 2-1-88 TD